
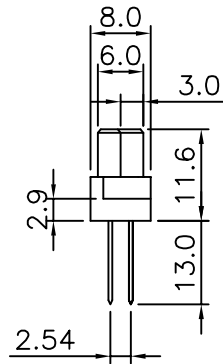


SPECIFICATIONS:

Current Rating : 2A
 Dielectric Withstanding Voltage : AC1000V
 For 1 Minute
 Insulation Resistance : 1000Megohms Min.
 At DC 500V
 Contact Resistance : 30 Milliohms At DC 100mA
 Operating Temperature : -55°C To +105°C
 Housing : 30% Glass Filled PBT UL 94V-0
 Contacts : Phosphor Bronze

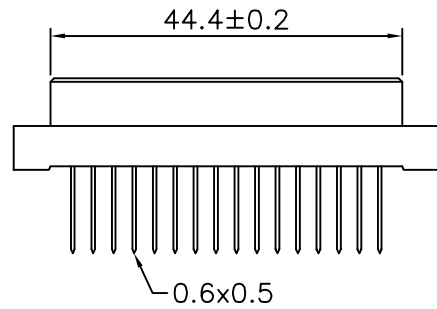

| Pitch | Position | Rows With Contacts | Contact Arrange |
|--------|----------|--------------------|-----------------|
| 2.54mm | 32 | a b | |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

05649

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25

AWG.

SCALE

NONE

REV.

A

UNIT
mm



AREA

REVISIONS

CHK

DATE