


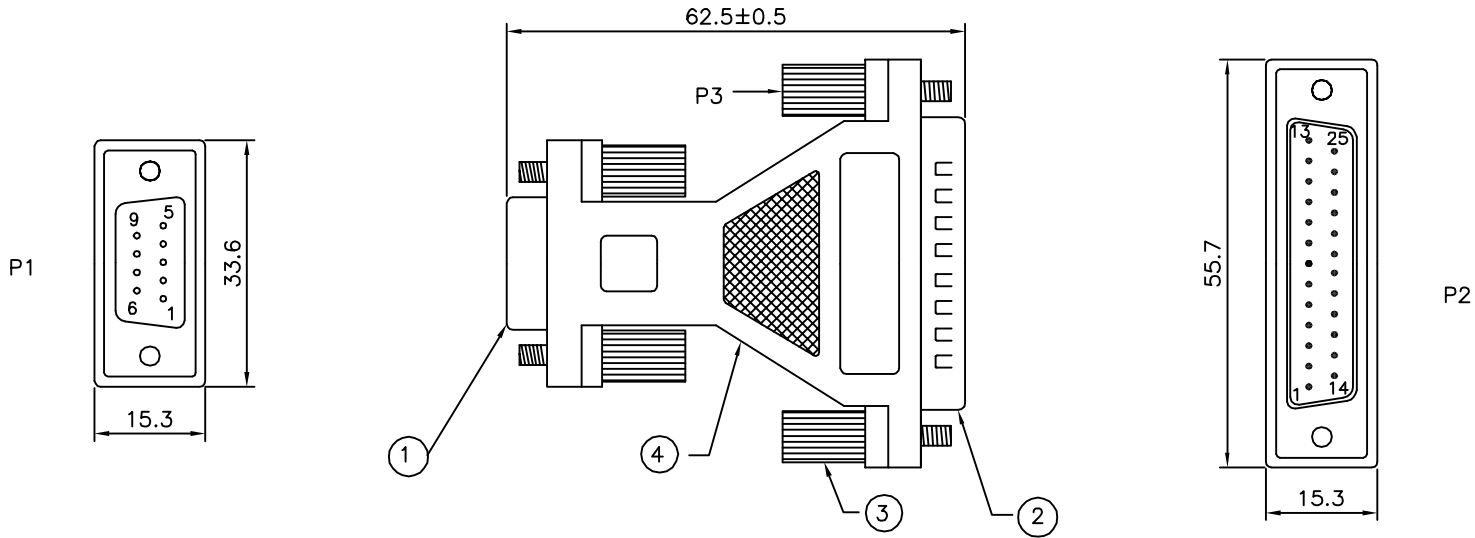

P1	P2
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
Shield	Shield

RoHS Compliant

4	UL1007 26Awg Insulator,Length 47mm(9Pcs),55mm(1Pcs)	10
	Molded PE Color Transparent	—
	Molded PVC Beige	—
3	Molded Thumbscrew #4-40,Length 21.5mm Beige	4
2	DB25 Male,Gold Flash On Contacts,Blue Insulator	1
1	DB9 Female,Gold Flash On Contacts,Blue Insulator	1
No.	Description	Q'ty

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

06058

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LXX

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

0~200 ±10
201~1000 ±20

SCALE


NONE

REV.

B0

UNIT

mm



B0

NEW RELEASE

HZF

02/18/2009

NO.REV.

REVISIONS

CHK

DATE