
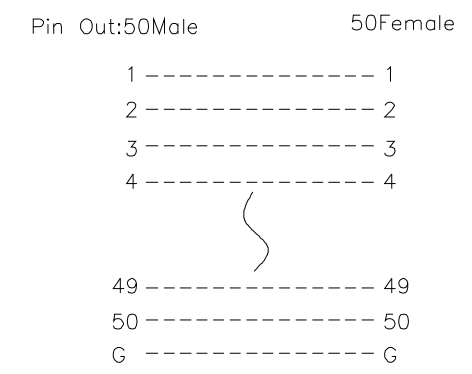
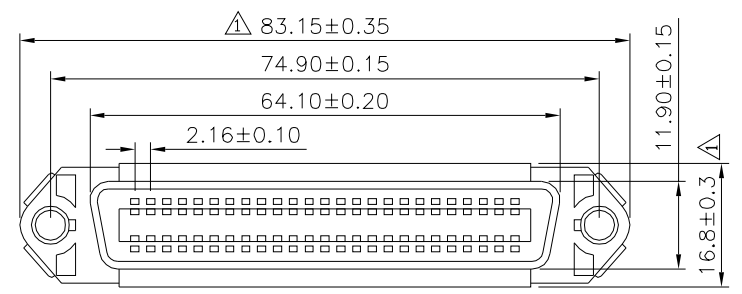


△ SPECIFICATION

Current Rating:3Amp
 Dielectric Strength:300V AC
 Insulation Resistance:30 Megaohms Min. At 300V DC
 Temperature:-25°C~+105°C
 Insulator:PBT+G.F.(UL94V-0),Blue
 Contact:Brass,Gold Plated Over Nickel
 Shell:Steel,Nickel Plated
 RoHS Compliant

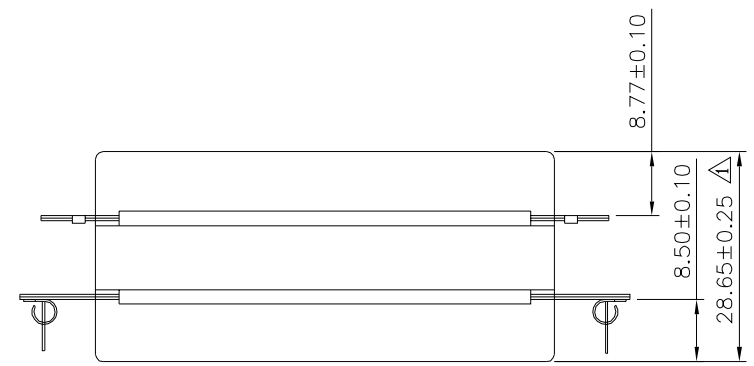

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
06073		MEI		
		CHECKED BY	HZF	
SCALE		DRAWING BY	CYP	.X ±0.20
NONE		REV.	A2	.XX ±0.15
				.XXX ±0.05
				UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	09/26/2019
△1	A1	Modify Data	HZF	06/08/2010
△0	A0	NEW RELEASE	HZF	05/16/2007