

# SPECIFICATION

Current Rating: 1A

Insulation Resistance : 500 Megohms/Min.

Withstanding Voltage : 500V AC/RMS For 1 Minute

Contact Resistance : 35 Milliohms Max.

Temperature Range : -55°C To +105°C



Housing :Plastic Thermoplasitc

P.B.T UL 94V-0,Black

Contact: Phosphor Bronze Gold Selective Plated

Front Shell : Steel,Nickel Plated Over Copper

Bracket: Steel, Nickel Plated Over Copper

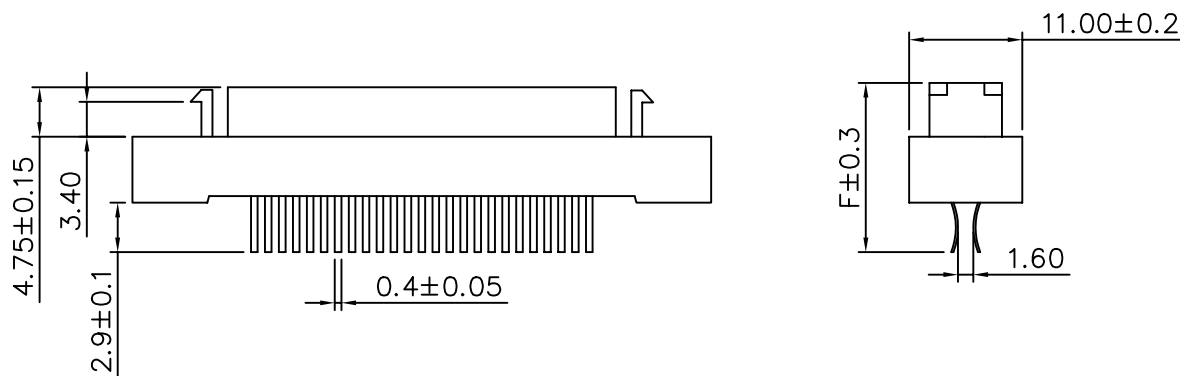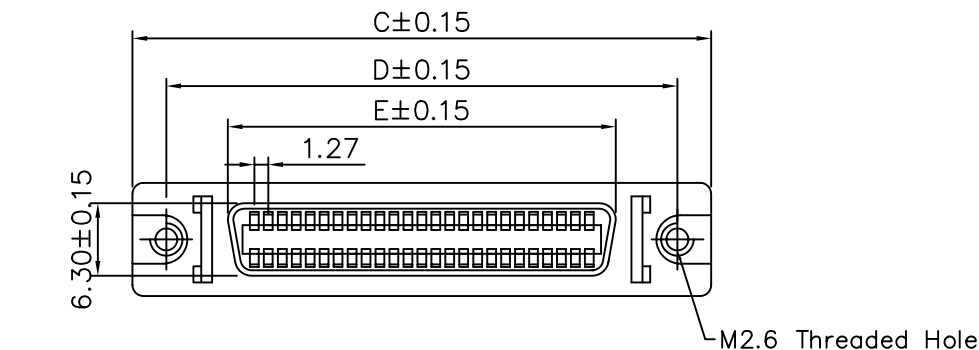

| Circuits | A     | B     | C     | D     | E     | F     |
|----------|-------|-------|-------|-------|-------|-------|
| 20       | 20.00 | 16.60 | 33.38 | 27.44 | 16.44 | 12.60 |
| 26       | 24.00 | 20.25 | 37.20 | 31.20 | 20.25 | 12.40 |
| 36       | 30.40 | 26.70 | 43.50 | 37.60 | 26.60 | 12.40 |
| 50       | 39.30 | 35.50 | 52.60 | 46.80 | 35.50 | 12.40 |
| 68       | 50.60 | 46.93 | 64.00 | 57.90 | 46.93 | 12.40 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.  
06097

APPROVED BY  
MEI  
CHECKED BY  
RAN  
DRAWING BY  
HZF

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X ±0.38  
.XX ±0.25  
AWG.

SCALE

NONE

REV.

A

UNIT  
mm



AREA

REVISIONS

CHK

DATE