

SPECIFICATION

Current Rating: 1A

Insulation Resistance : 500 Megohms/Min.

Withstanding Voltage : 500V AC/RMS For 1 Minute

Contact Resistance : 35 Milliohms Max.

Temperature Range : -55°C To +105°C



Housing :Plastic Thermoplasitc

P.B.T UL 94V-0,Black

Contact: Phosphor Bronze Gold Selective Plated

Front Shell : Steel,Nickel Plated Over Copper

Bracket: Steel, Nickel Plated Over Copper

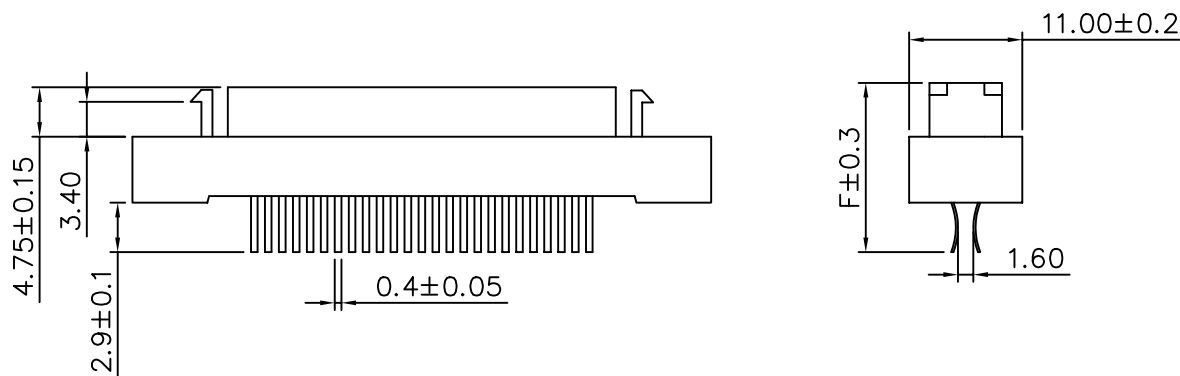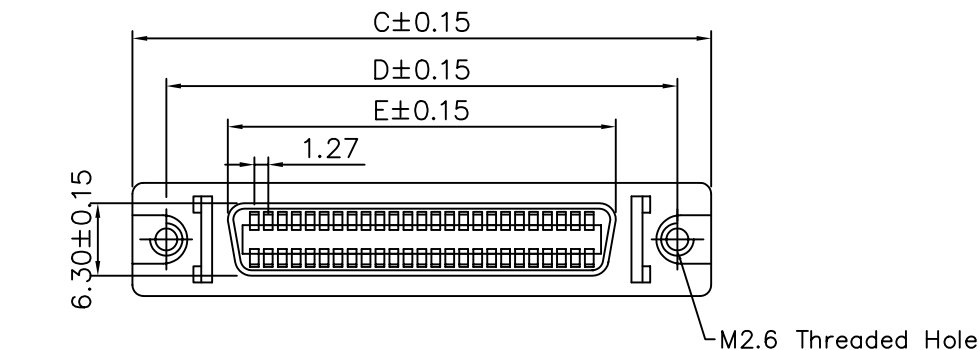

Circuits	A	B	C	D	E	F
20	20.00	16.60	33.38	27.44	16.44	12.60
26	24.00	20.25	37.20	31.20	20.25	12.40
36	30.40	26.70	43.50	37.60	26.60	12.40
50	39.30	35.50	52.60	46.80	35.50	12.40
68	50.60	46.93	64.00	57.90	46.93	12.40

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
06098

APPROVED BY
MEI
CHECKED BY
RAN
DRAWING BY
HZF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.38
.XX ±0.25
AWG.

SCALE

NONE

REV.

A

UNIT
mm



AREA

REVISIONS

CHK

DATE