
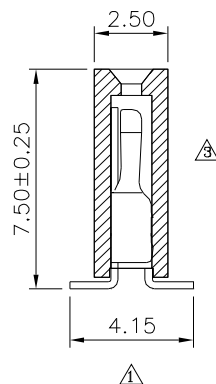
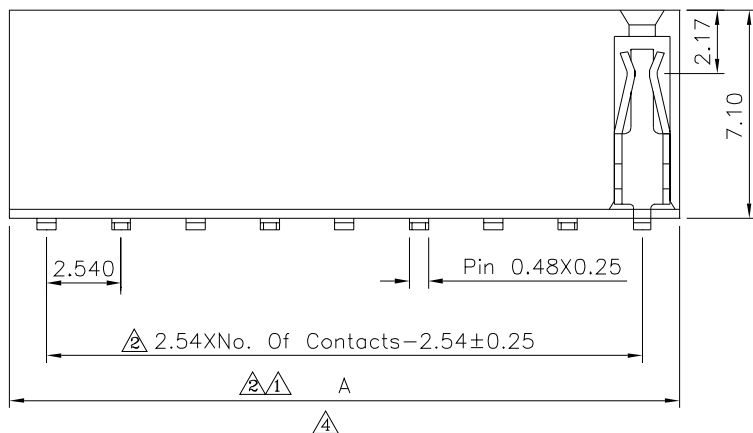


Recommended P.C.B Layout

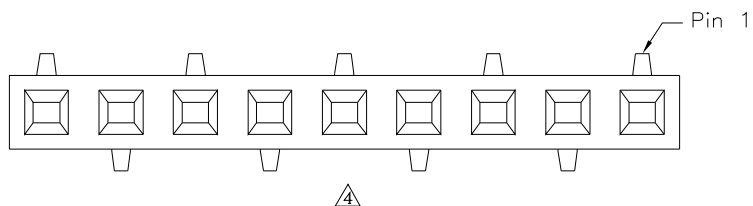

SPECIFICATION

Current Rating:3 Amp
Dielectric Withstanding:600V AC/DC
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Operation Temperature:-40°C~+105°C
⚠ Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

⚠	Pin	A	Pin	A
	02	5.08	22	56.38
	03	7.62	23	58.92
	04	10.66	24	61.46
	05	13.20	25	64.00
	06	15.74	26	66.54
	07	18.28	27	69.08
	08	20.82	28	71.62
	09	23.36	29	74.16
	10	25.90	30	76.70
	11	28.44	31	79.24
	12	30.98	32	81.78
	13	33.52	33	84.32
	14	36.06	34	86.86
	15	38.60	35	89.40
	16	41.14	36	91.94
	17	43.68	37	94.48
	18	46.22	38	97.02
	19	48.76	39	99.56
	20	51.30	40	102.10
	21	53.84		

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. ⚠

06686

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.35
.XX ±0.25
.XXX ±0.05

UNIT
mm



⚠ A4

Modify Data

HZF

04/24/2020

⚠ A3

Modify Data

HZF

08/17/2010

⚠ A2

Modify Data

HZF

01/06/2010

⚠ A1

Modify Data

HZF

12/22/2009

⚠ A0

NEW RELEASE

SHIN

08/14/2006

NO. REV.

REVISIONS

CHK

DATE