
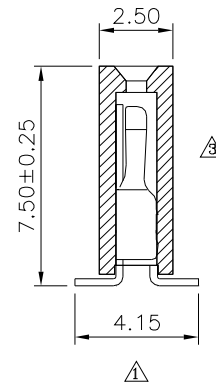
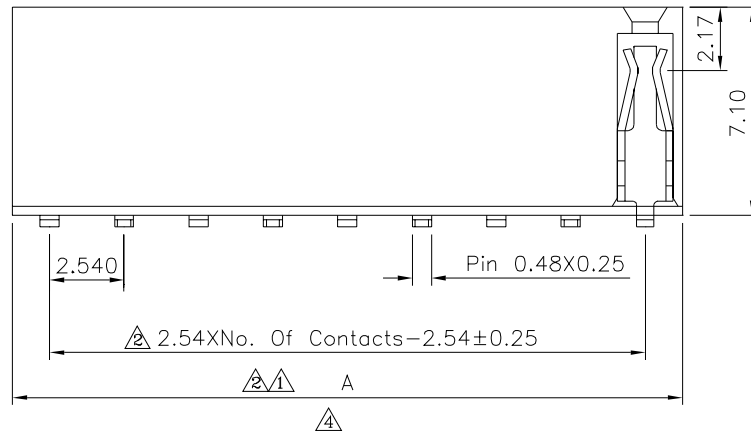


Recommended P.C.B Layout

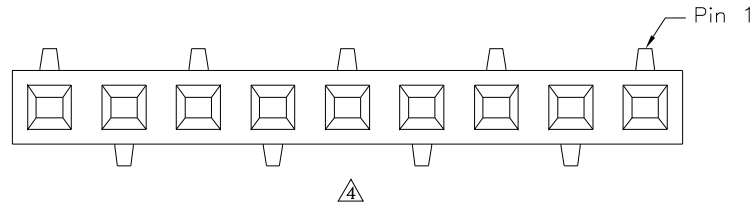

SPECIFICATION

Current Rating:3 Amp
Dielectric Withstanding:600V AC/DC
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Operation Temperature:-40°C~+105°C
⚠ Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

Pin	A	Pin	A
02	5.08	22	56.38
03	7.62	23	58.92
04	10.66	24	61.46
05	13.20	25	64.00
06	15.74	26	66.54
07	18.28	27	69.08
08	20.82	28	71.62
09	23.36	29	74.16
10	25.90	30	76.70
11	28.44	31	79.24
12	30.98	32	81.78
13	33.52	33	84.32
14	36.06	34	86.86
15	38.60	35	89.40
16	41.14	36	91.94
17	43.68	37	94.48
18	46.22	38	97.02
19	48.76	39	99.56
20	51.30	40	102.10
21	53.84		

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. ⚠

06695

SCALE

NONE

REV.

A4

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.35
.XX ±0.25
.XXX ±0.05

UNIT
mm



⚠ A4

Modify Data

HZF

04/24/2020

⚠ A3

Modify Data

HZF

08/17/2010

⚠ A2

Modify Data

HZF

01/06/2010

⚠ A1

Modify Data

HZF

12/22/2009

⚠ A0

NEW RELEASE

SHIN

08/14/2006

NO. REV.

REVISIONS

CHK

DATE