
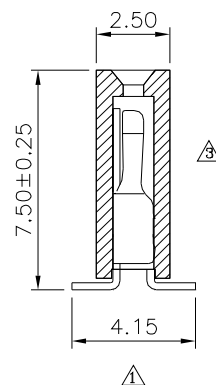
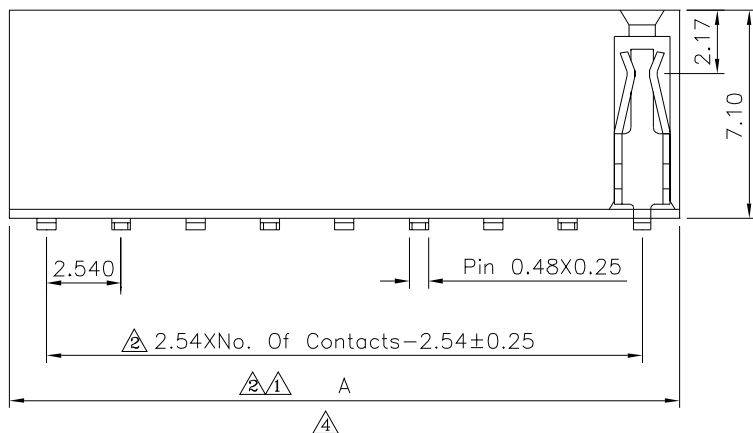


Recommended P.C.B Layout

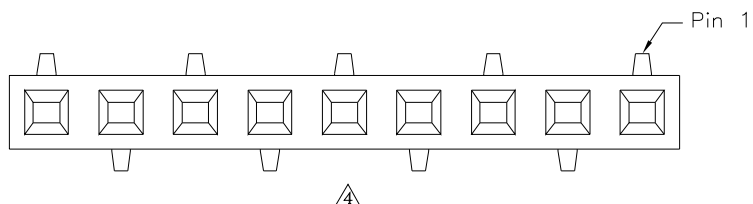

# SPECIFICATION

Current Rating:3 Amp  
Dielectric Withstanding:600V AC/DC  
Insulation Resistance:1000 Megaohms Min.  
Contact Resistance:20 Milliohms Max.  
Operation Temperature:-40°C~+105°C  
⚠ Contact:Phosphor Bronze,Gold Flash Over Nickel  
Insulator:PA6T(UL94V-0),Black  
RoHS Compliant

| Pin | A     | Pin | A      |
|-----|-------|-----|--------|
| 02  | 5.08  | 22  | 56.38  |
| 03  | 7.62  | 23  | 58.92  |
| 04  | 10.66 | 24  | 61.46  |
| 05  | 13.20 | 25  | 64.00  |
| 06  | 15.74 | 26  | 66.54  |
| 07  | 18.28 | 27  | 69.08  |
| 08  | 20.82 | 28  | 71.62  |
| 09  | 23.36 | 29  | 74.16  |
| 10  | 25.90 | 30  | 76.70  |
| 11  | 28.44 | 31  | 79.24  |
| 12  | 30.98 | 32  | 81.78  |
| 13  | 33.52 | 33  | 84.32  |
| 14  | 36.06 | 34  | 86.86  |
| 15  | 38.60 | 35  | 89.40  |
| 16  | 41.14 | 36  | 91.94  |
| 17  | 43.68 | 37  | 94.48  |
| 18  | 46.22 | 38  | 97.02  |
| 19  | 48.76 | 39  | 99.56  |
| 20  | 51.30 | 40  | 102.10 |
| 21  | 53.84 |     |        |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. ⚠

06696

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A4

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
X. ±0.50  
.X ±0.35  
.XX ±0.25  
.XXX ±0.05

UNIT  
mm



⚠ A4

Modify Data

HZF

04/24/2020

⚠ A3

Modify Data

HZF

08/17/2010

⚠ A2

Modify Data

HZF

01/06/2010

⚠ A1

Modify Data

HZF

12/22/2009

⚠ A0

NEW RELEASE

SHIN

08/14/2006

NO. REV.

REVISIONS

CHK

DATE