File No.	100KD24217	SHEET	1/1

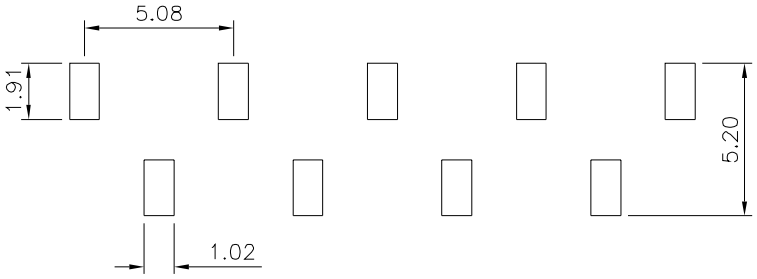

Recommended P.C.B Layout

SPECIFICATION
Current Rating:3 Amp
Dielectric Withstanding:600V AC/DC
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Operation Temperature:−40°C~+105°C
4 Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T(UL94V−0),Black
RoHS Compliant

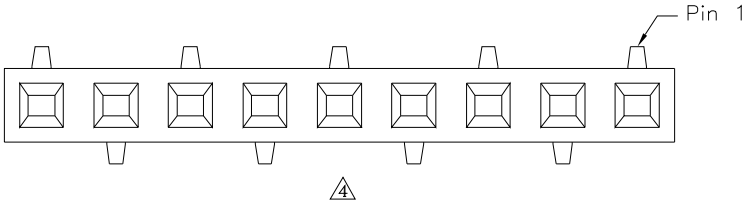

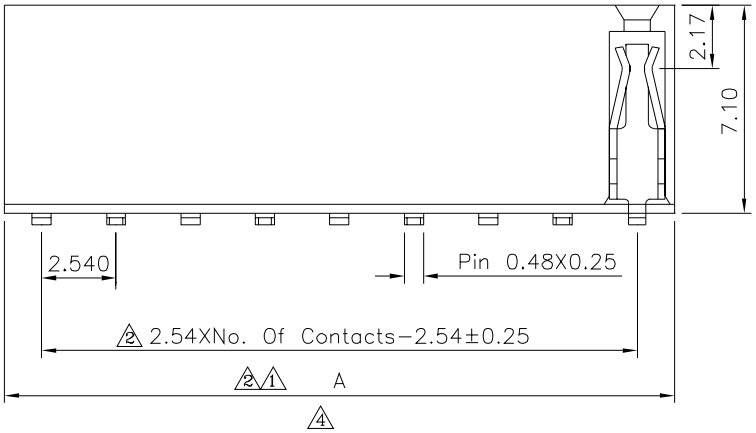

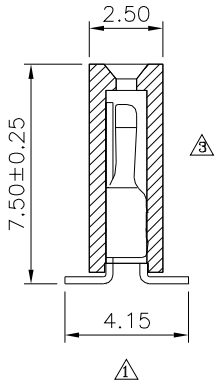

4

Pin	A	Pin	A
02	5.08	22	56.38
03	7.62	23	58.92
04	10.66	24	61.46
05	13.20	25	64.00
06	15.74	26	66.54
07	18.28	27	69.08
08	20.82	28	71.62
09	23.36	29	74.16
10	25.90	30	76.70
11	28.44	31	79.24
12	30.98	32	81.78
13	33.52	33	84.32
14	36.06	34	86.86
15	38.60	35	89.40
16	41.14	36	91.94
17	43.68	37	94.48
18	46.22	38	97.02
19	48.76	39	99.56
20	51.30	40	102.10
21	53.84		

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No. 4	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.35 .XX ±0.25 .XXX ±0.05
06697	CHECKED BY HZF	
	DRAWING BY CYP	
SCALE NONE	REV. A4	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
4	A4	Modify Data	HZF	04/24/2020
3	A3	Modify Data	HZF	08/17/2010
2	A2	Modify Data	HZF	01/06/2010
1	A1	Modify Data	HZF	12/22/2009
0	A0	NEW RELEASE	SHIN	08/14/2006