| File No. | 100KD24217 | SHEET | 1/1 |
|---|---|---|---|

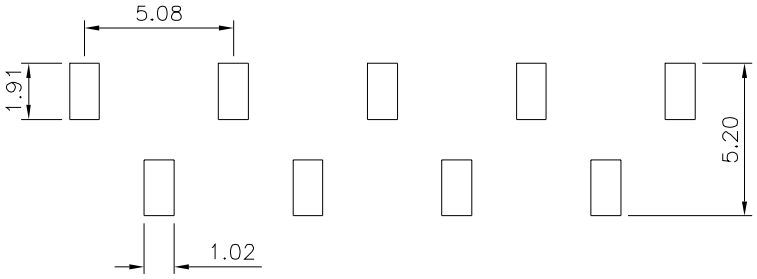


Recommended P.C.B Layout

SPECIFICATION
Current Rating:3 Amp
Dielectric Withstanding:600V AC/DC
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Operation Temperature:−40°C~+105°C
4 Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T(UL94V−0),Black
RoHS Compliant

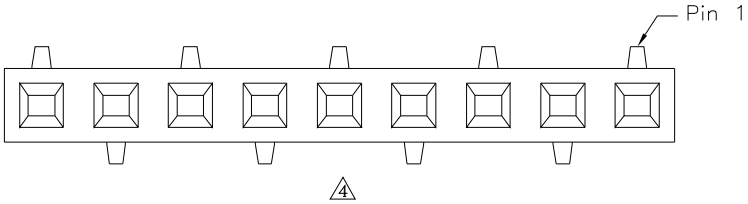


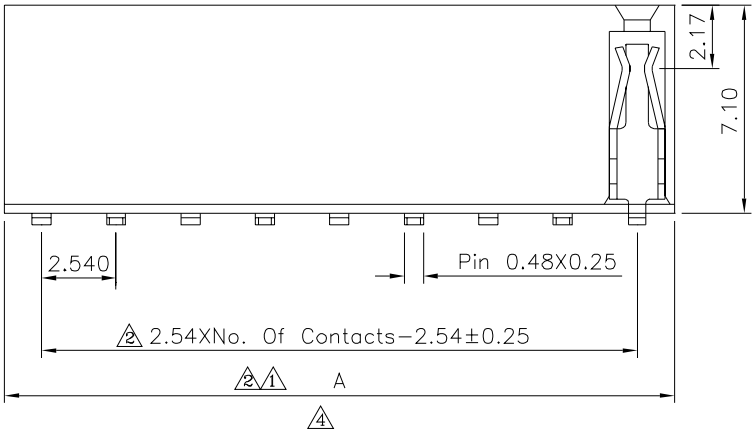


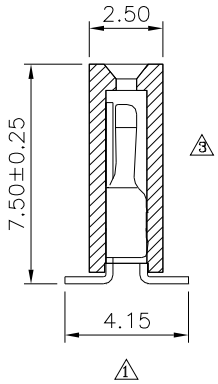


4

| Pin | A | Pin | A |
|---|---|---|---|
| 02 | 5.08 | 22 | 56.38 |
| 03 | 7.62 | 23 | 58.92 |
| 04 | 10.66 | 24 | 61.46 |
| 05 | 13.20 | 25 | 64.00 |
| 06 | 15.74 | 26 | 66.54 |
| 07 | 18.28 | 27 | 69.08 |
| 08 | 20.82 | 28 | 71.62 |
| 09 | 23.36 | 29 | 74.16 |
| 10 | 25.90 | 30 | 76.70 |
| 11 | 28.44 | 31 | 79.24 |
| 12 | 30.98 | 32 | 81.78 |
| 13 | 33.52 | 33 | 84.32 |
| 14 | 36.06 | 34 | 86.86 |
| 15 | 38.60 | 35 | 89.40 |
| 16 | 41.14 | 36 | 91.94 |
| 17 | 43.68 | 37 | 94.48 |
| 18 | 46.22 | 38 | 97.02 |
| 19 | 48.76 | 39 | 99.56 |
| 20 | 51.30 | 40 | 102.10 |
| 21 | 53.84 | | |

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

| DRAWING No. 4 | APPROVED BY MEI | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.35 .XX ±0.25 .XXX ±0.05 |
|---|---|---|
| 06702 | CHECKED BY HZF | |
| | DRAWING BY CYP | |
| SCALE NONE | REV. A4 | UNIT mm |

| NO. | REV. | REVISIONS | CHK | DATE |
|---|---|---|---|---|
| 4 | A4 | Modify Data | HZF | 04/24/2020 |
| 3 | A3 | Modify Data | HZF | 08/17/2010 |
| 2 | A2 | Modify Data | HZF | 01/06/2010 |
| 1 | A1 | Modify Data | HZF | 12/22/2009 |
| 0 | A0 | NEW RELEASE | SHIN | 08/14/2006 |