


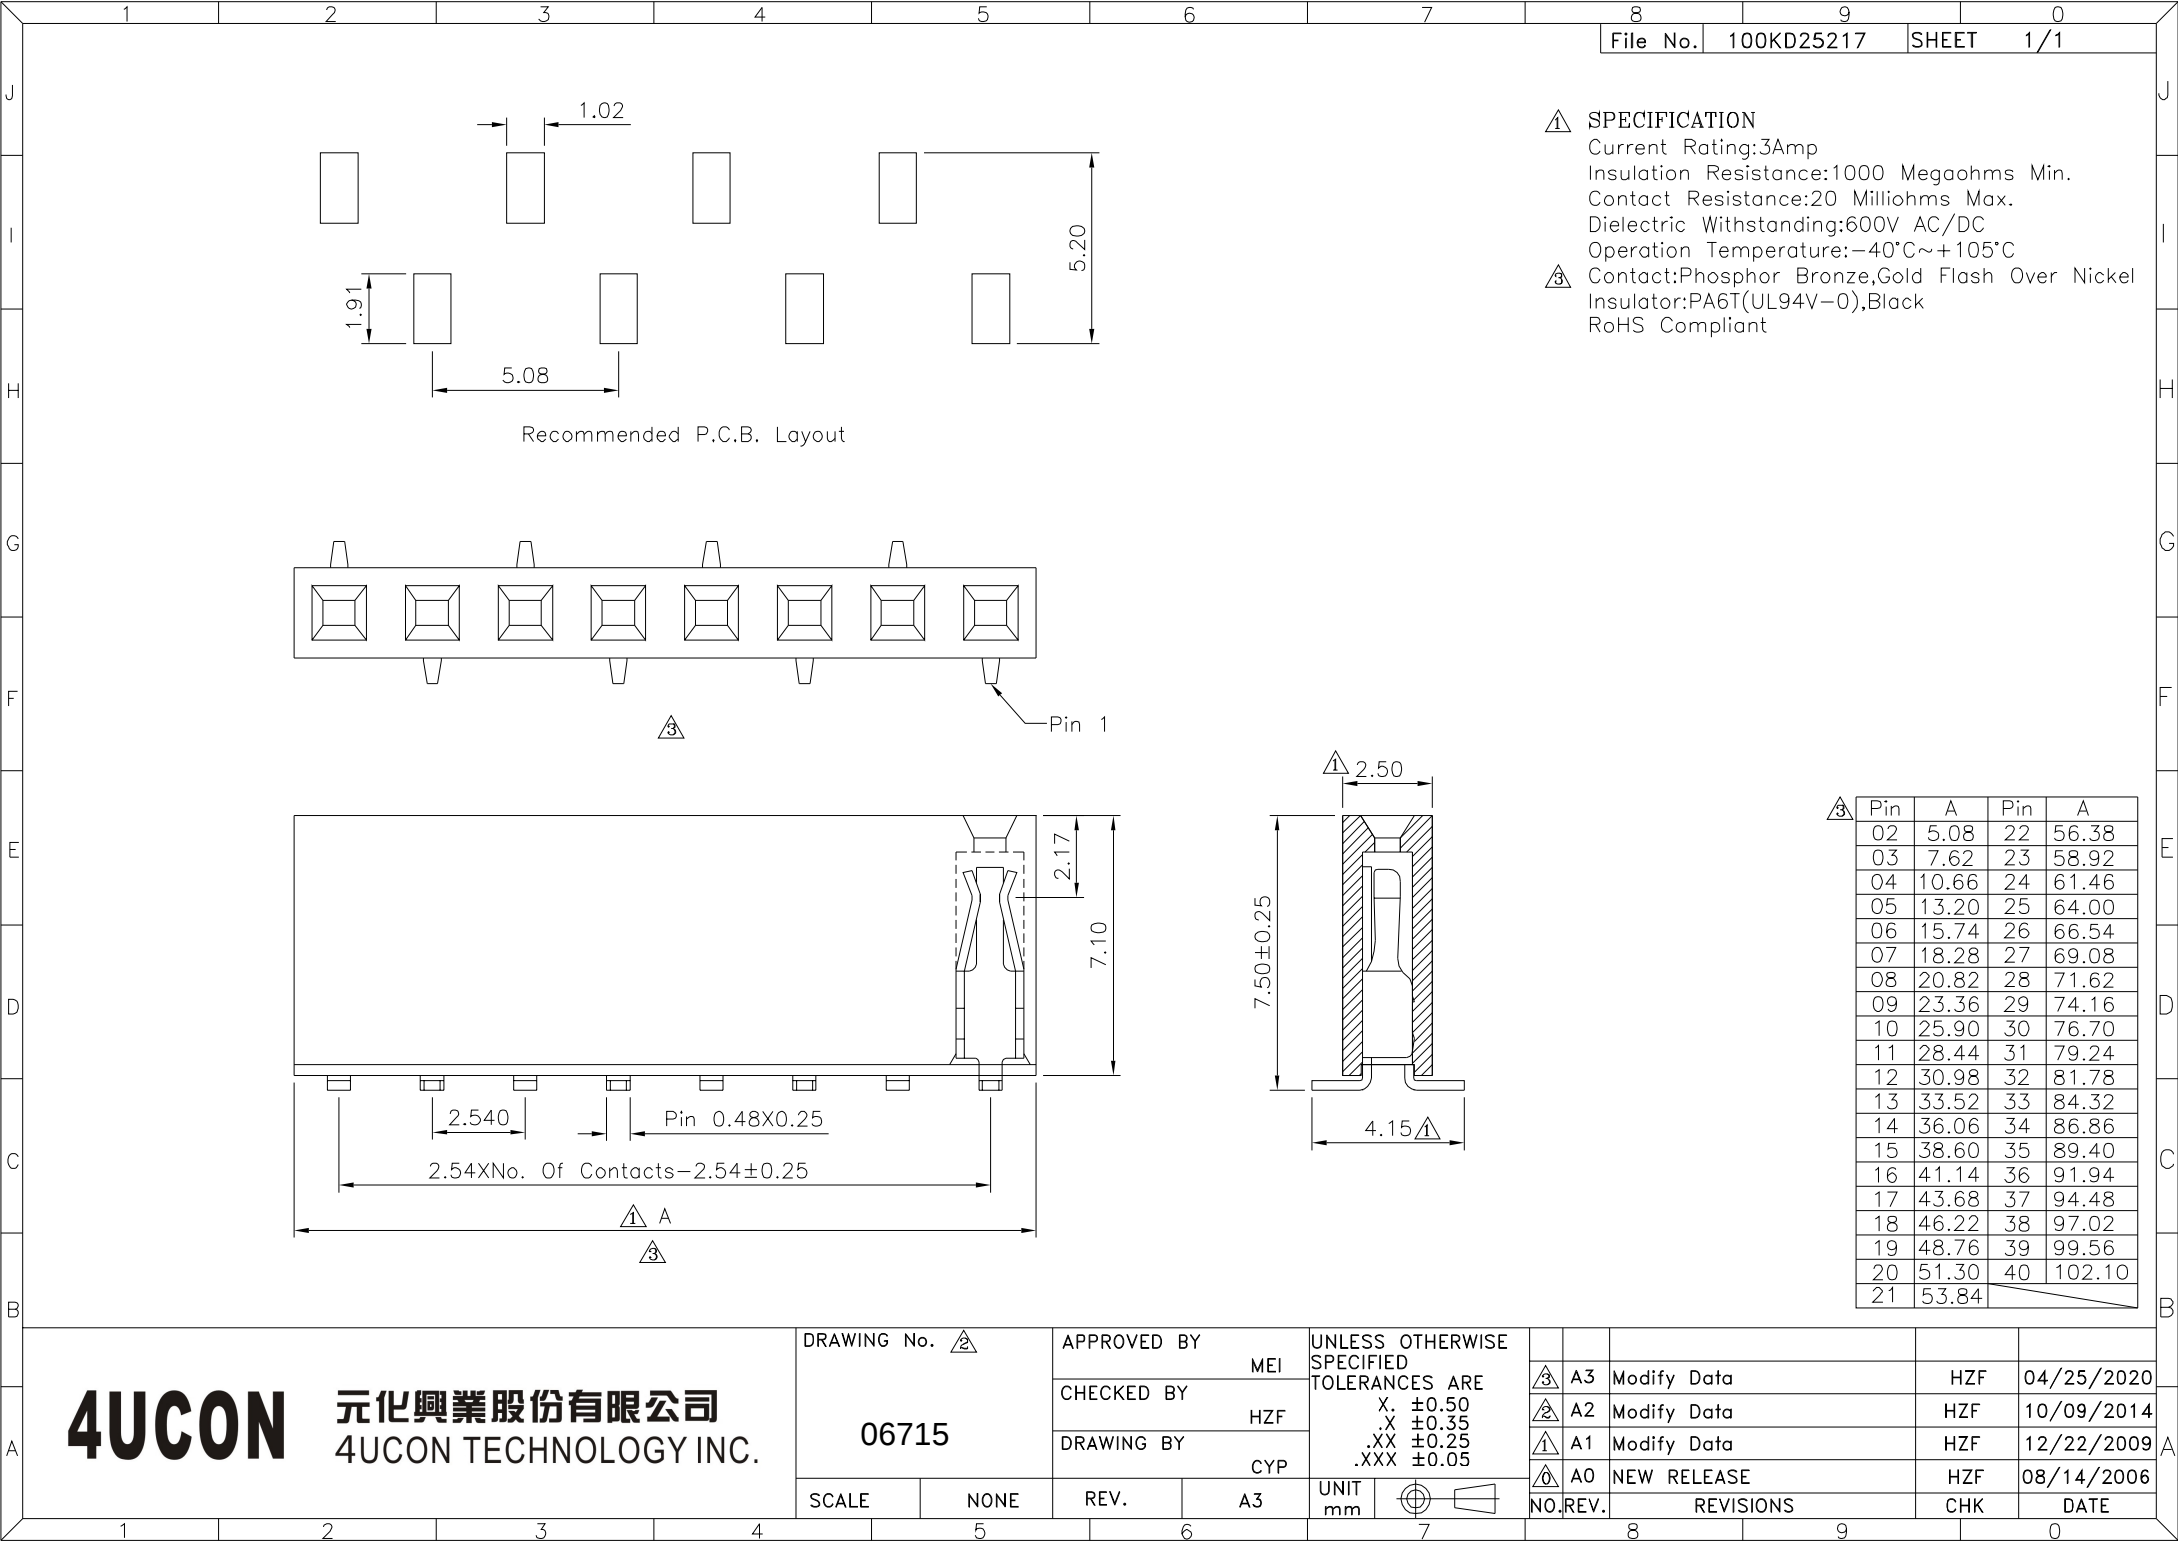

△ SPECIFICATION
Current Rating:3Amp
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Dielectric Withstanding:600V AC/DC
Operation Temperature:-40°C~+105°C
△ Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

△ Pin	A	Pin	A
02	5.08	22	56.38
03	7.62	23	58.92
04	10.66	24	61.46
05	13.20	25	64.00
06	15.74	26	66.54
07	18.28	27	69.08
08	20.82	28	71.62
09	23.36	29	74.16
10	25.90	30	76.70
11	28.44	31	79.24
12	30.98	32	81.78
13	33.52	33	84.32
14	36.06	34	86.86
15	38.60	35	89.40
16	41.14	36	91.94
17	43.68	37	94.48
18	46.22	38	97.02
19	48.76	39	99.56
20	51.30	40	102.10
21	53.84		

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No. △

06715

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.35
.XX ±0.25
.XXX ±0.05

UNIT
mm



△ A3

Modify Data

HZF

04/25/2020

△ A2

Modify Data

HZF

10/09/2014

△ A1

Modify Data

HZF

12/22/2009

△ A0

NEW RELEASE

HZF

08/14/2006

NO. REV.

REVISIONS

CHK

DATE