


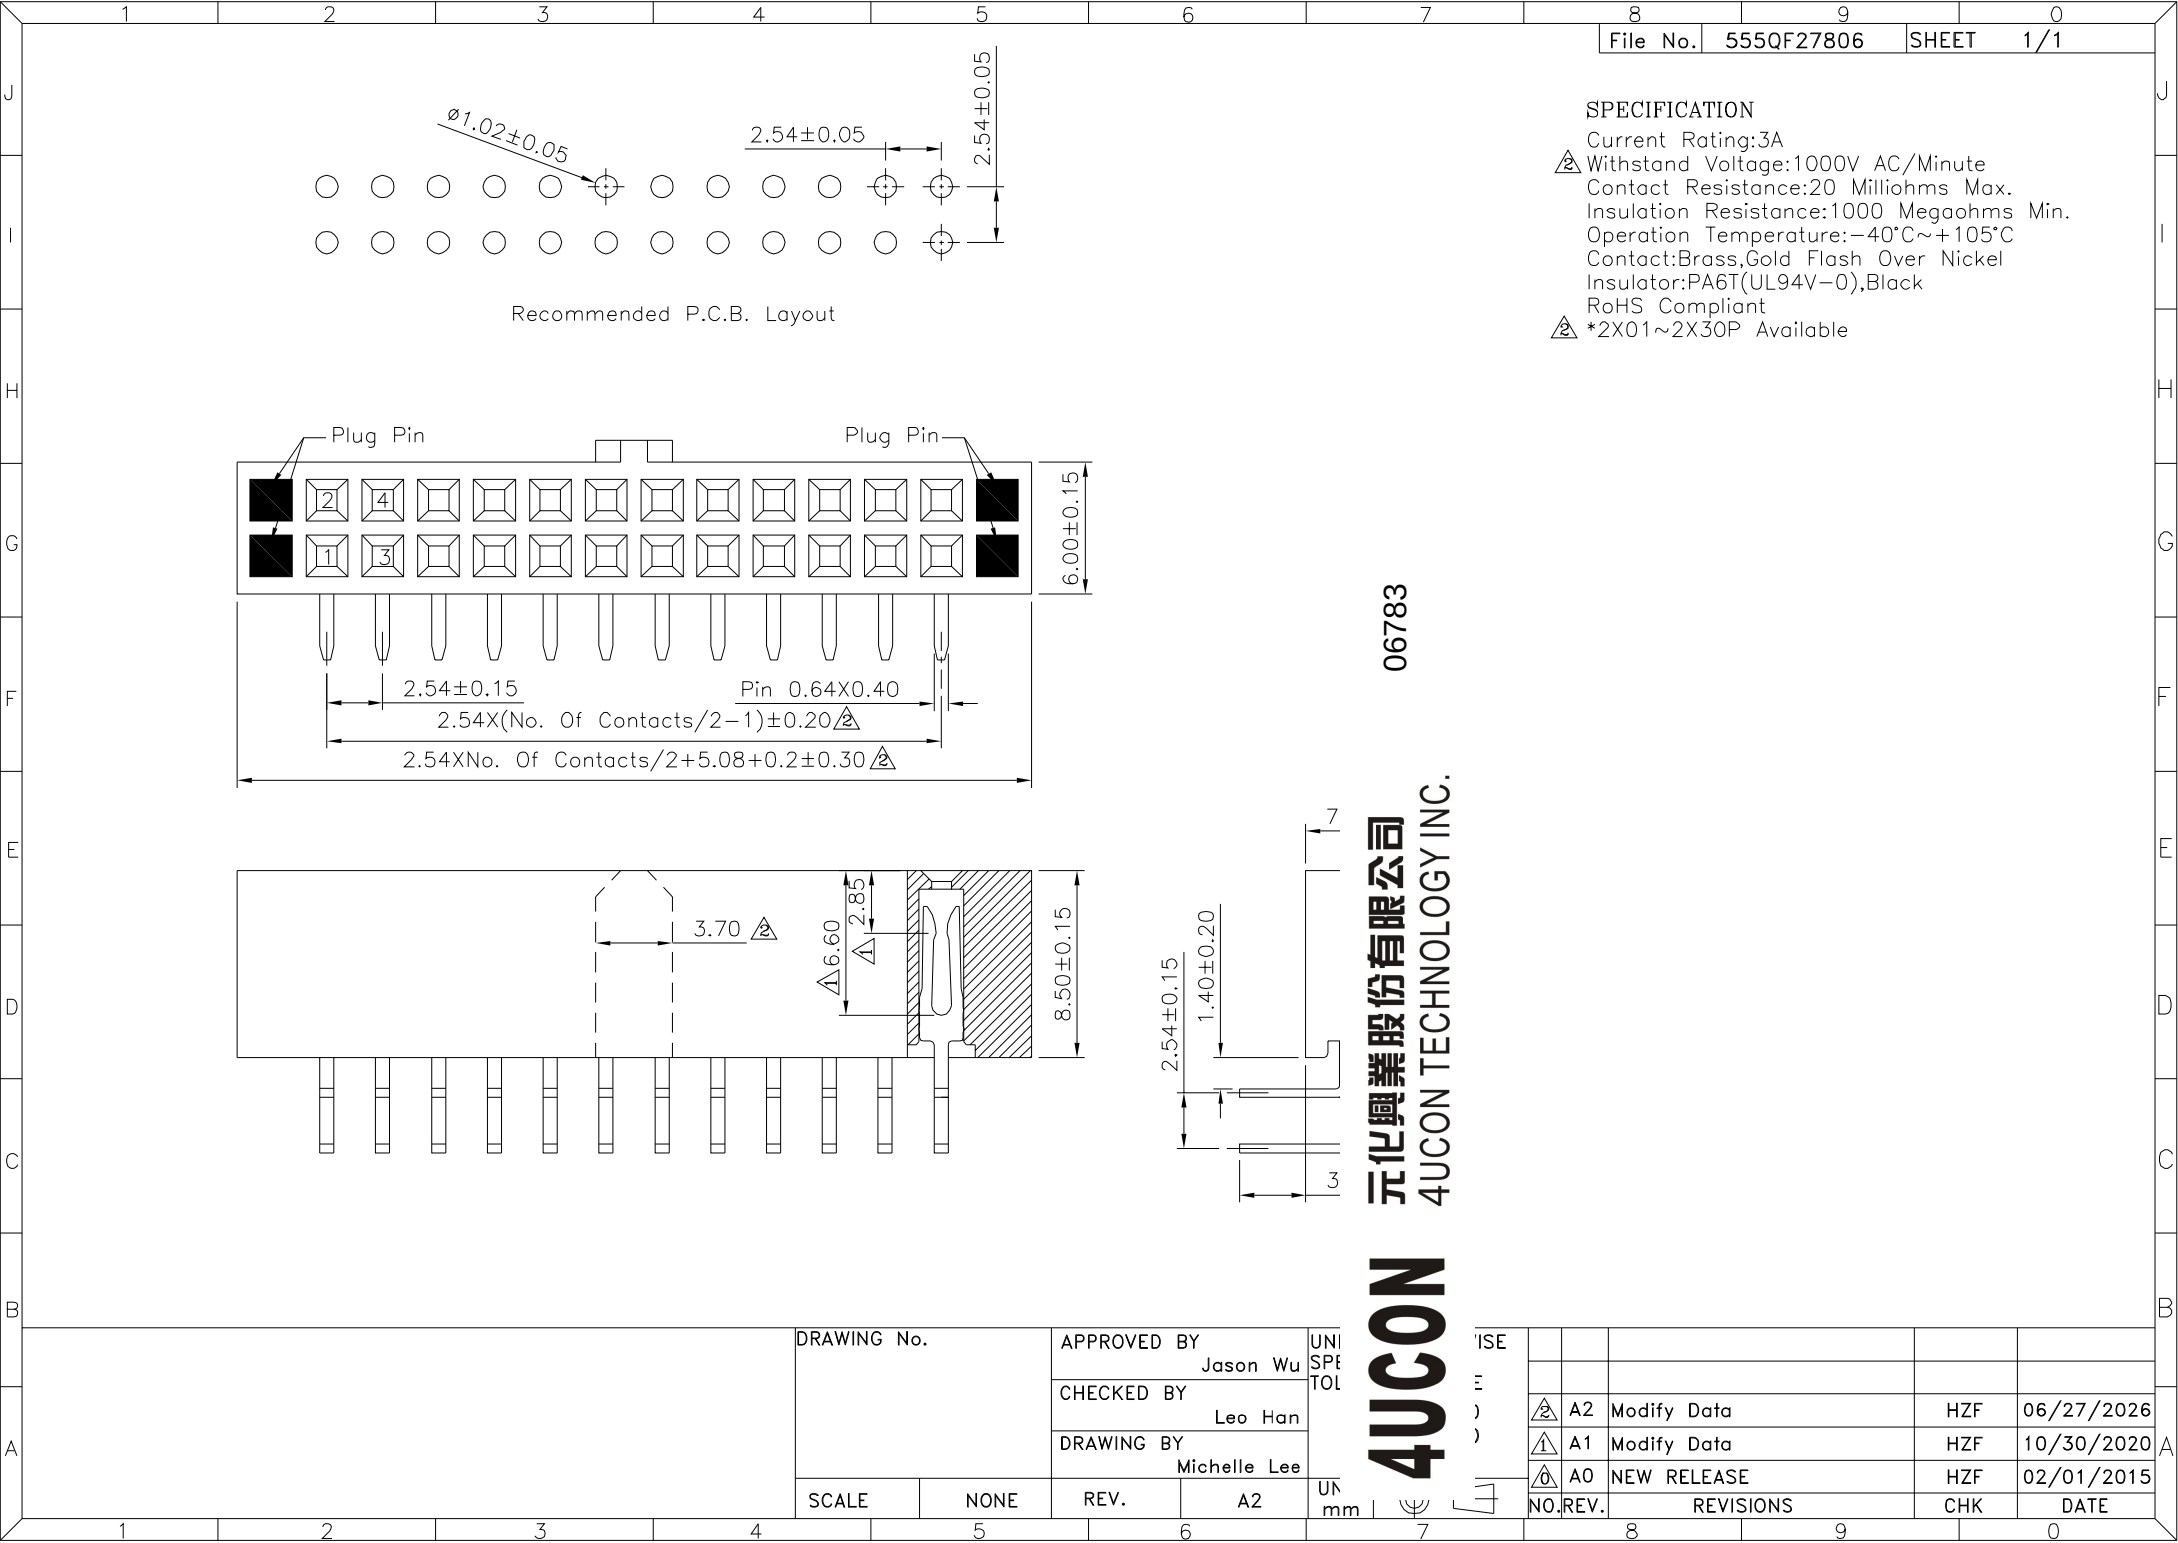

SPECIFICATION

- Current Rating:3A
- Withstand Voltage:1000V AC/Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Contact:Brass,Gold Flash Over Nickel
- Insulator:PA6T(UL94V-0),Black
- RoHS Compliant
- *2X01~2X30P Available

06783

元化興業股份有限公司
4U CON TECHNOLOGY INC.

4U CON

DRAWING No.		APPROVED BY		UNI SPE TOL
		Jason Wu		
		CHECKED BY		
Leo Han				
DRAWING BY				
Michelle Lee				
SCALE	NONE	REV.	A2	UN

ISE E) 4					
	A2	Modify Data	HZF	06/27/2026	
	A1	Modify Data	HZF	10/30/2020	
	A0	NEW RELEASE	HZF	02/01/2015	
NO. REV.		REVISIONS		CHK	DATE