


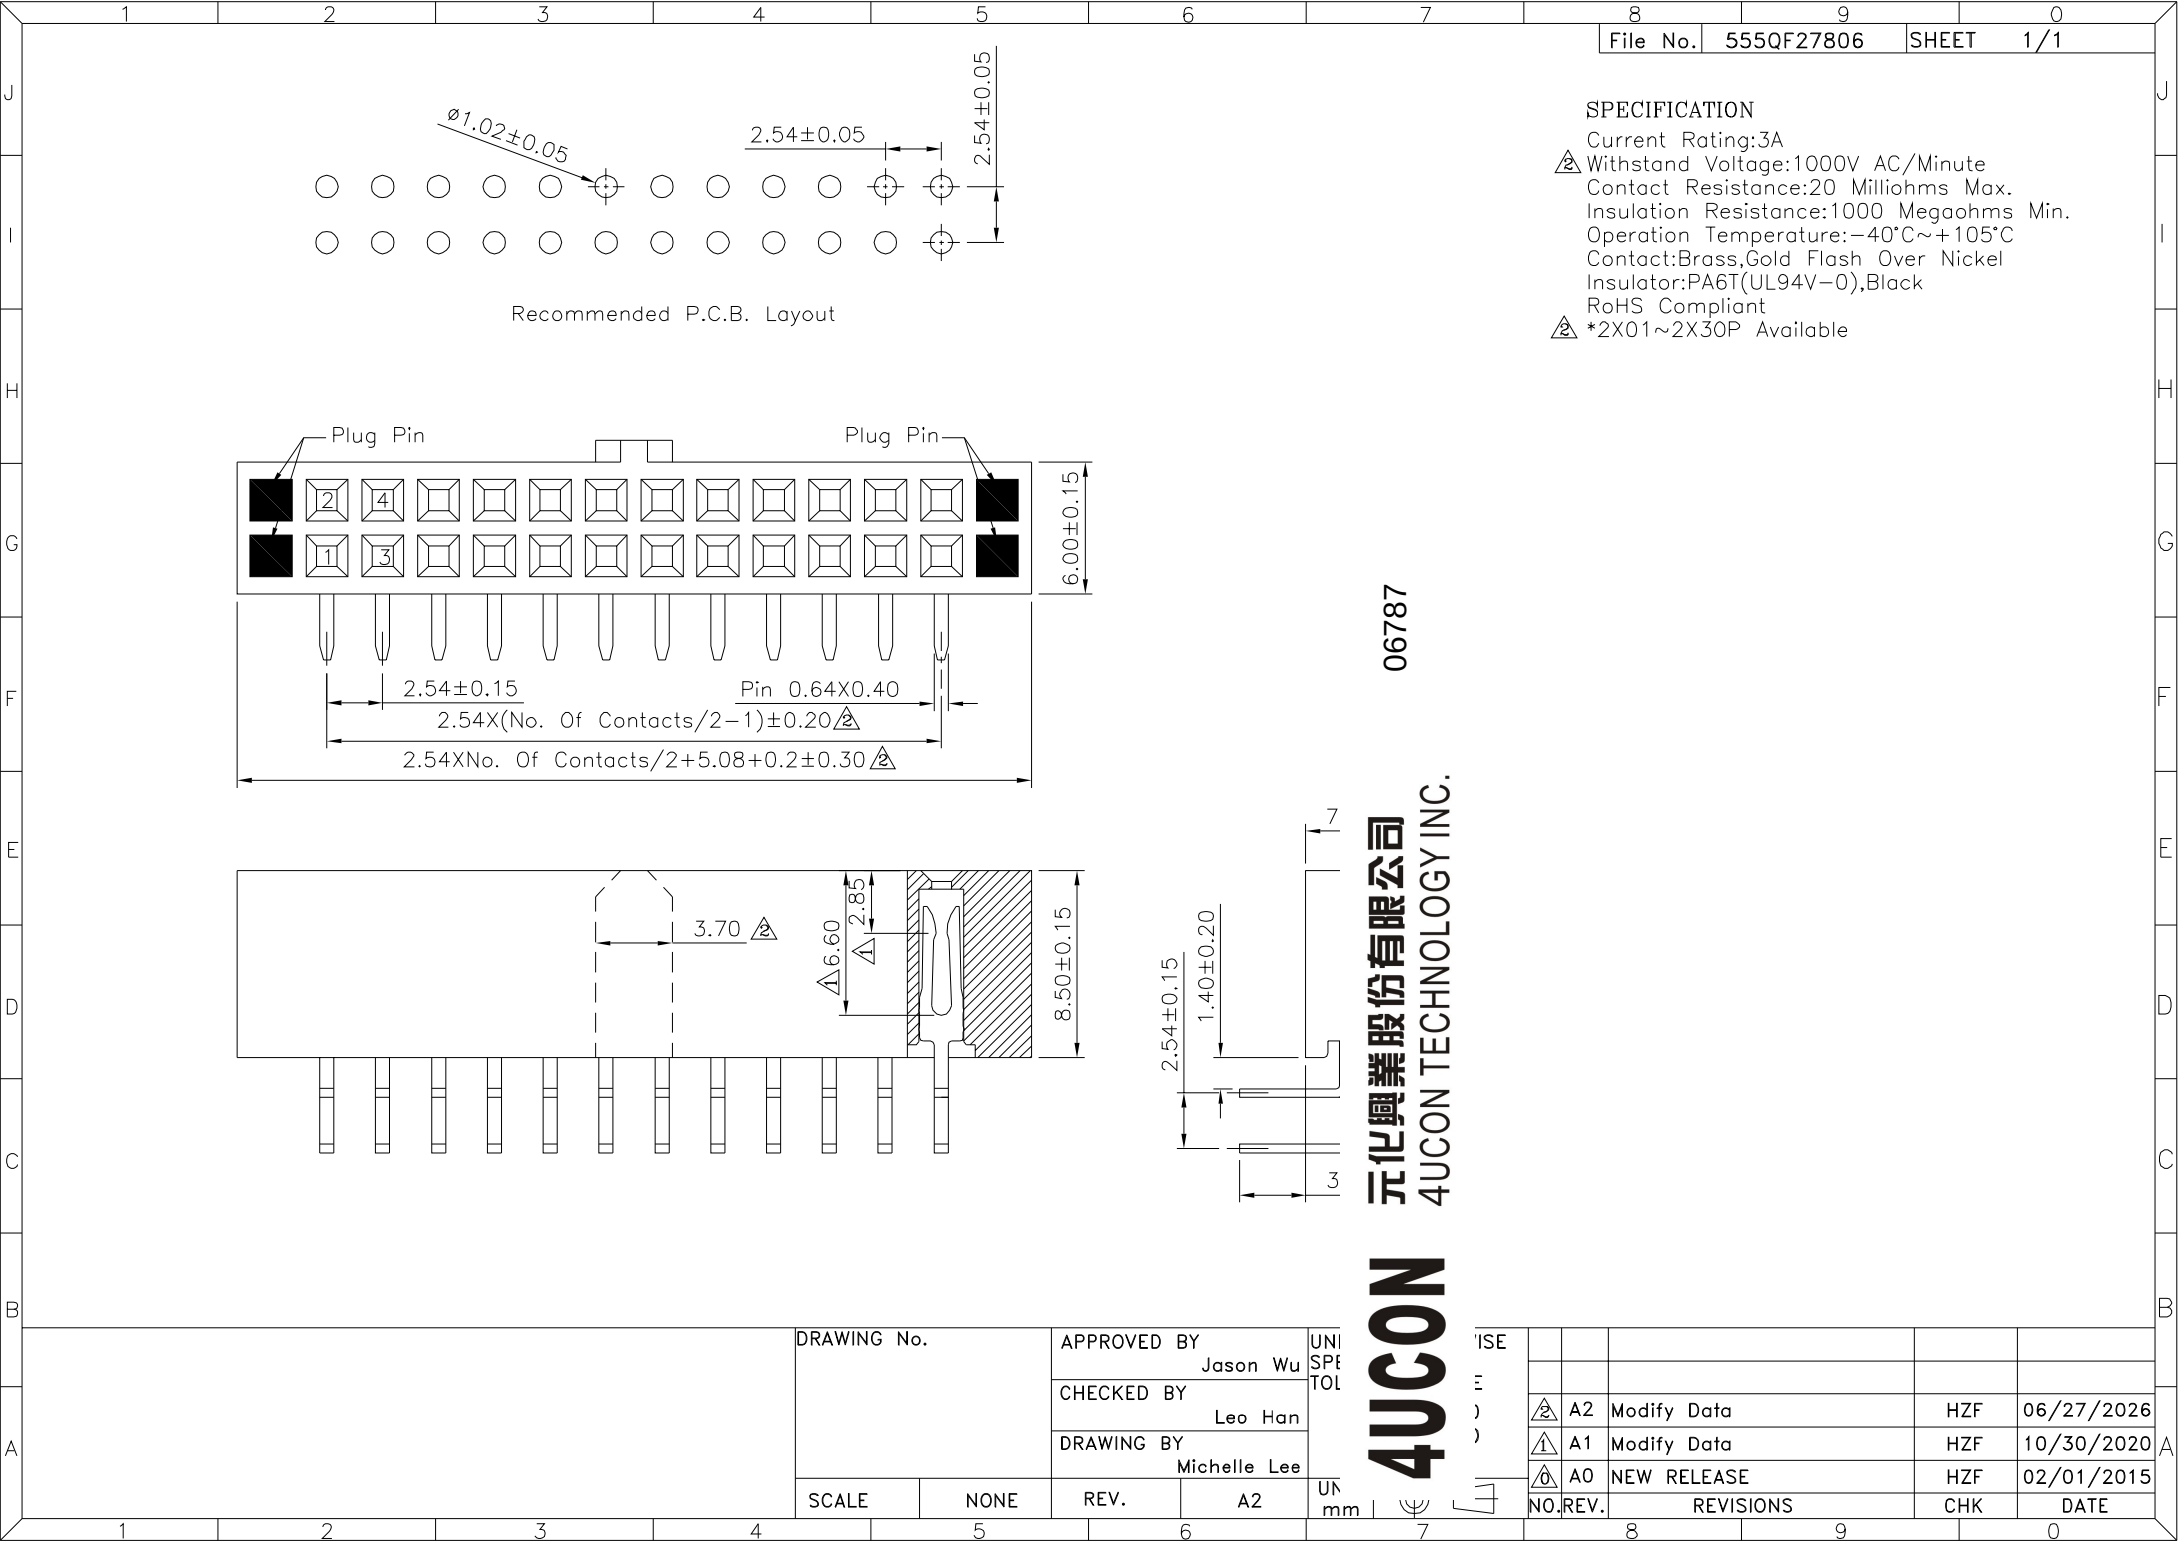

SPECIFICATION

- Current Rating:3A
- Withstand Voltage:1000V AC/Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Contact:Brass,Gold Flash Over Nickel
- Insulator:PA6T(UL94V-0),Black
- RoHS Compliant
- *2X01~2X30P Available

06787

元化興業股份有限公司
4U CON TECHNOLOGY INC.

4U CON

DRAWING No.

APPROVED BY
Jason Wu

CHECKED BY
Leo Han

DRAWING BY
Michelle Lee

SCALE

NONE

REV.

A2

UNI
SPE
TOL

UN
mm

ISE

E

)

4

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	06/27/2026
△1	A1	Modify Data	HZF	10/30/2020
△0	A0	NEW RELEASE	HZF	02/01/2015