


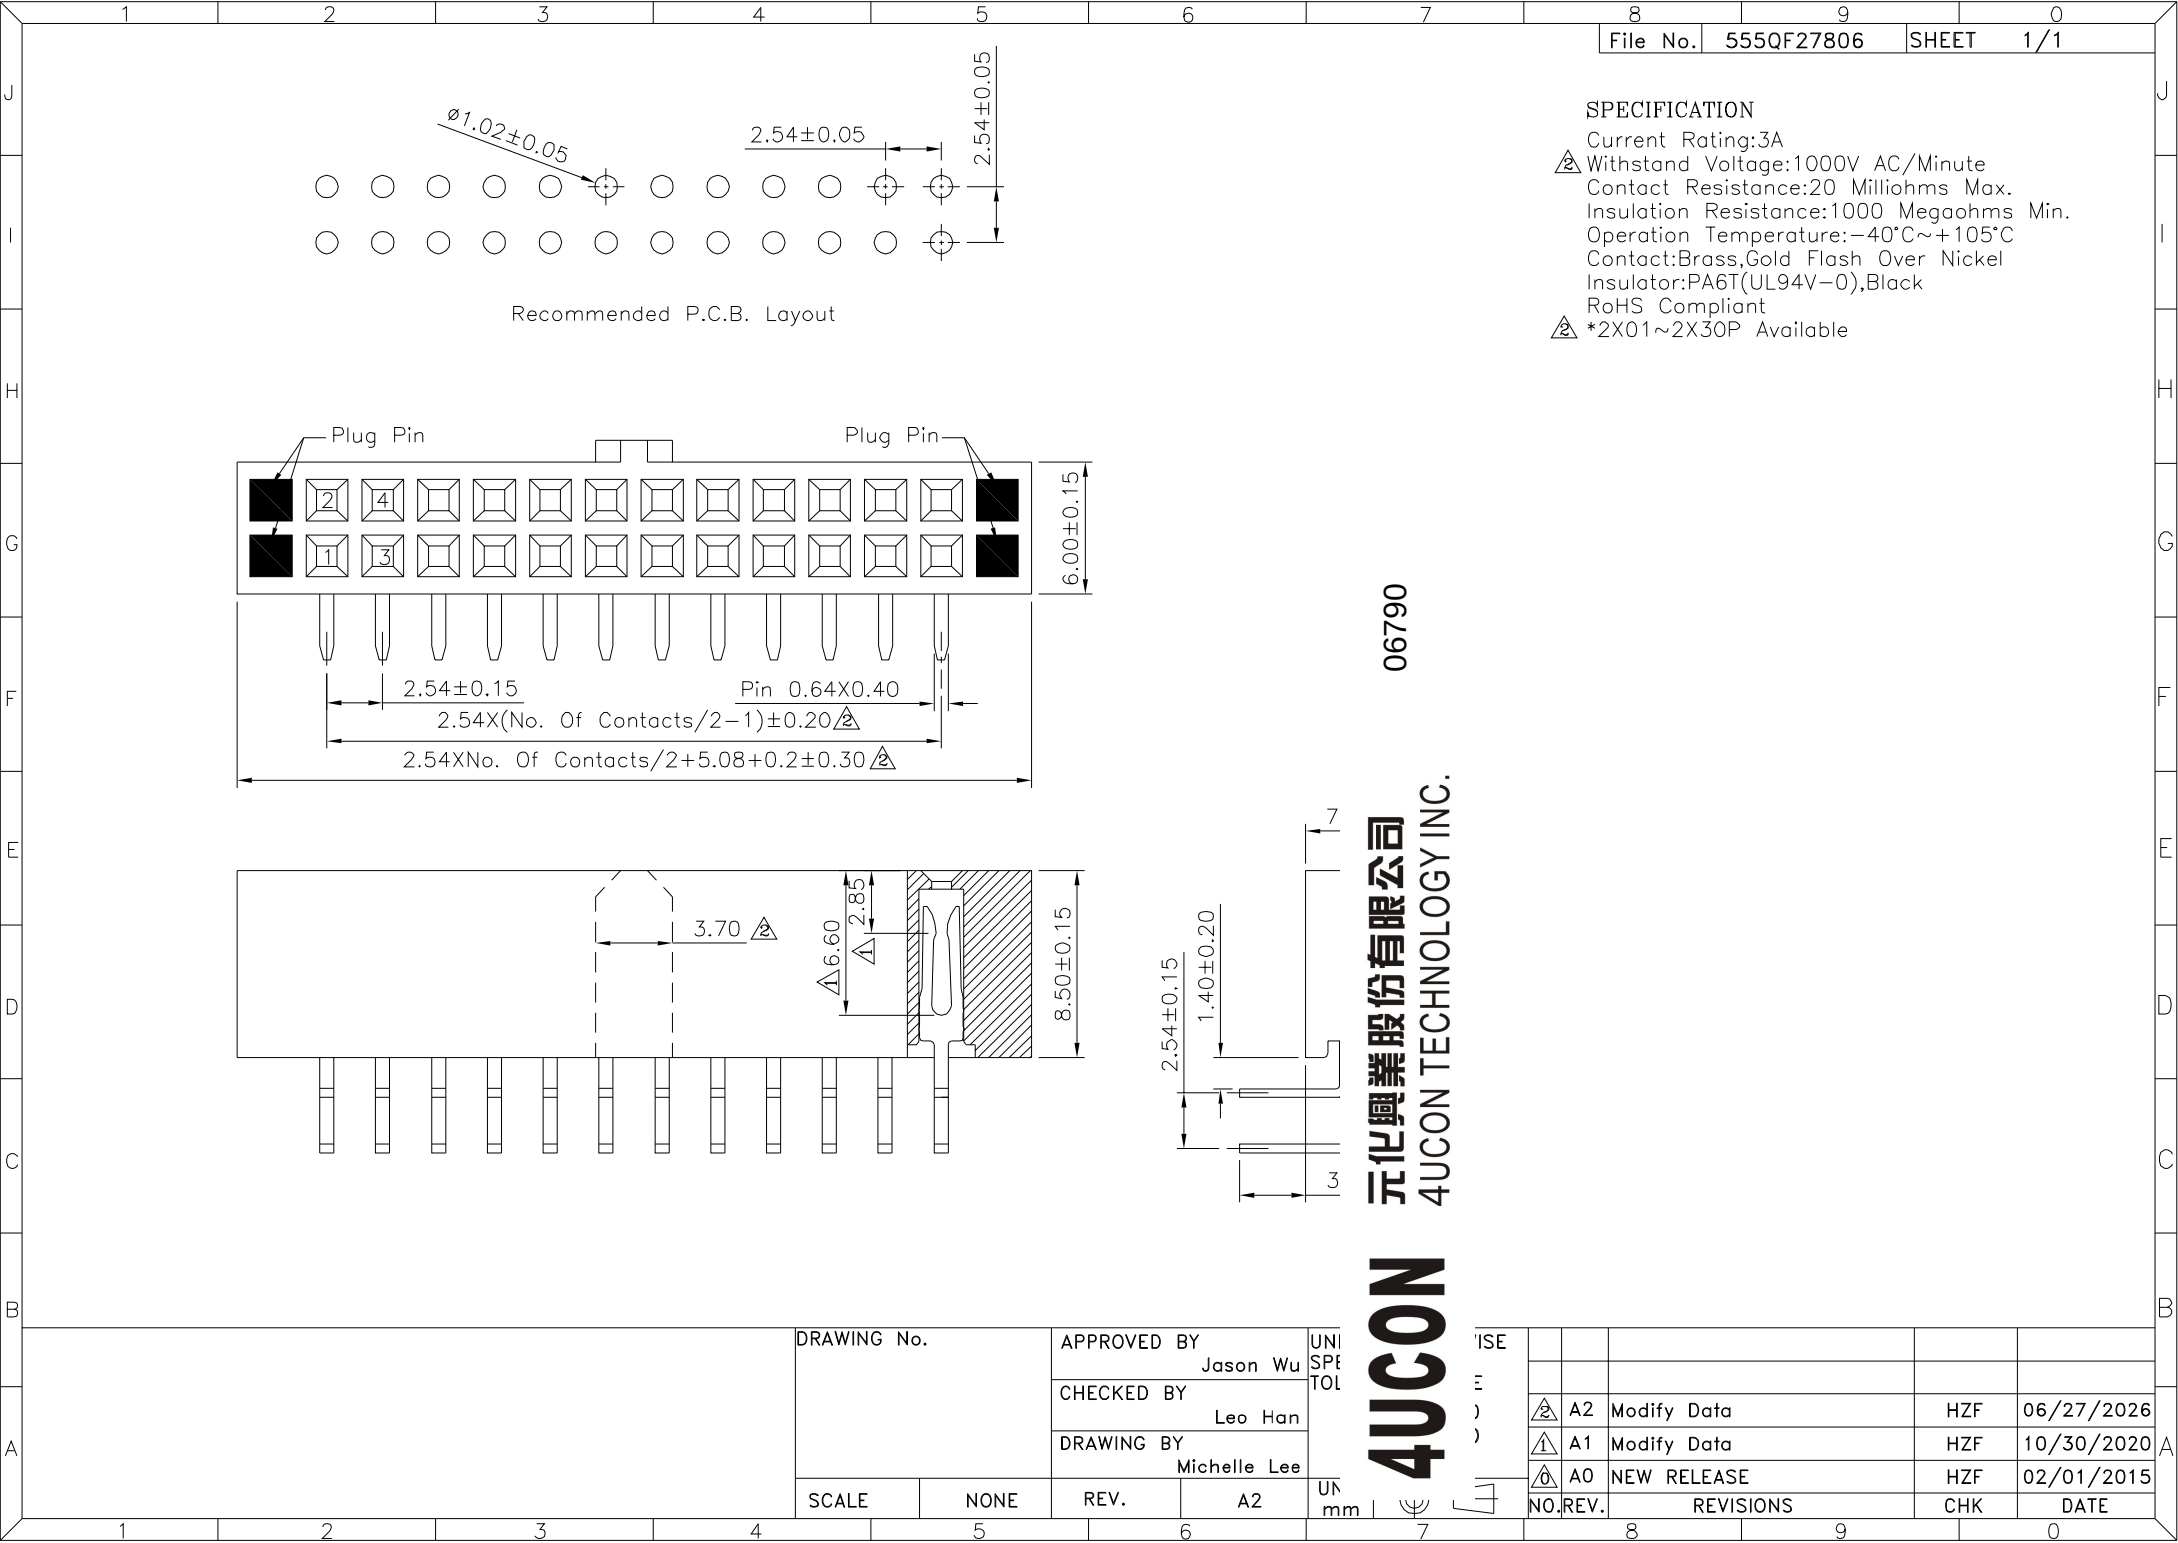

SPECIFICATION
Current Rating:3A
⚠ Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V−0),Black
RoHS Compliant
⚠ *2X01~2X30P Available

06790
元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNI SPE TOL
		Jason Wu		
		CHECKED BY		
		Leo Han		
		DRAWING BY		
		Michelle Lee		UN mm
SCALE	NONE	REV.	A2	

ISE E) 4					
	⚠ A2	Modify Data	HZF	06/27/2026	
	⚠ A1	Modify Data	HZF	10/30/2020	
	⚠ A0	NEW RELEASE	HZF	02/01/2015	
NO. REV.		REVISIONS		CHK	DATE