


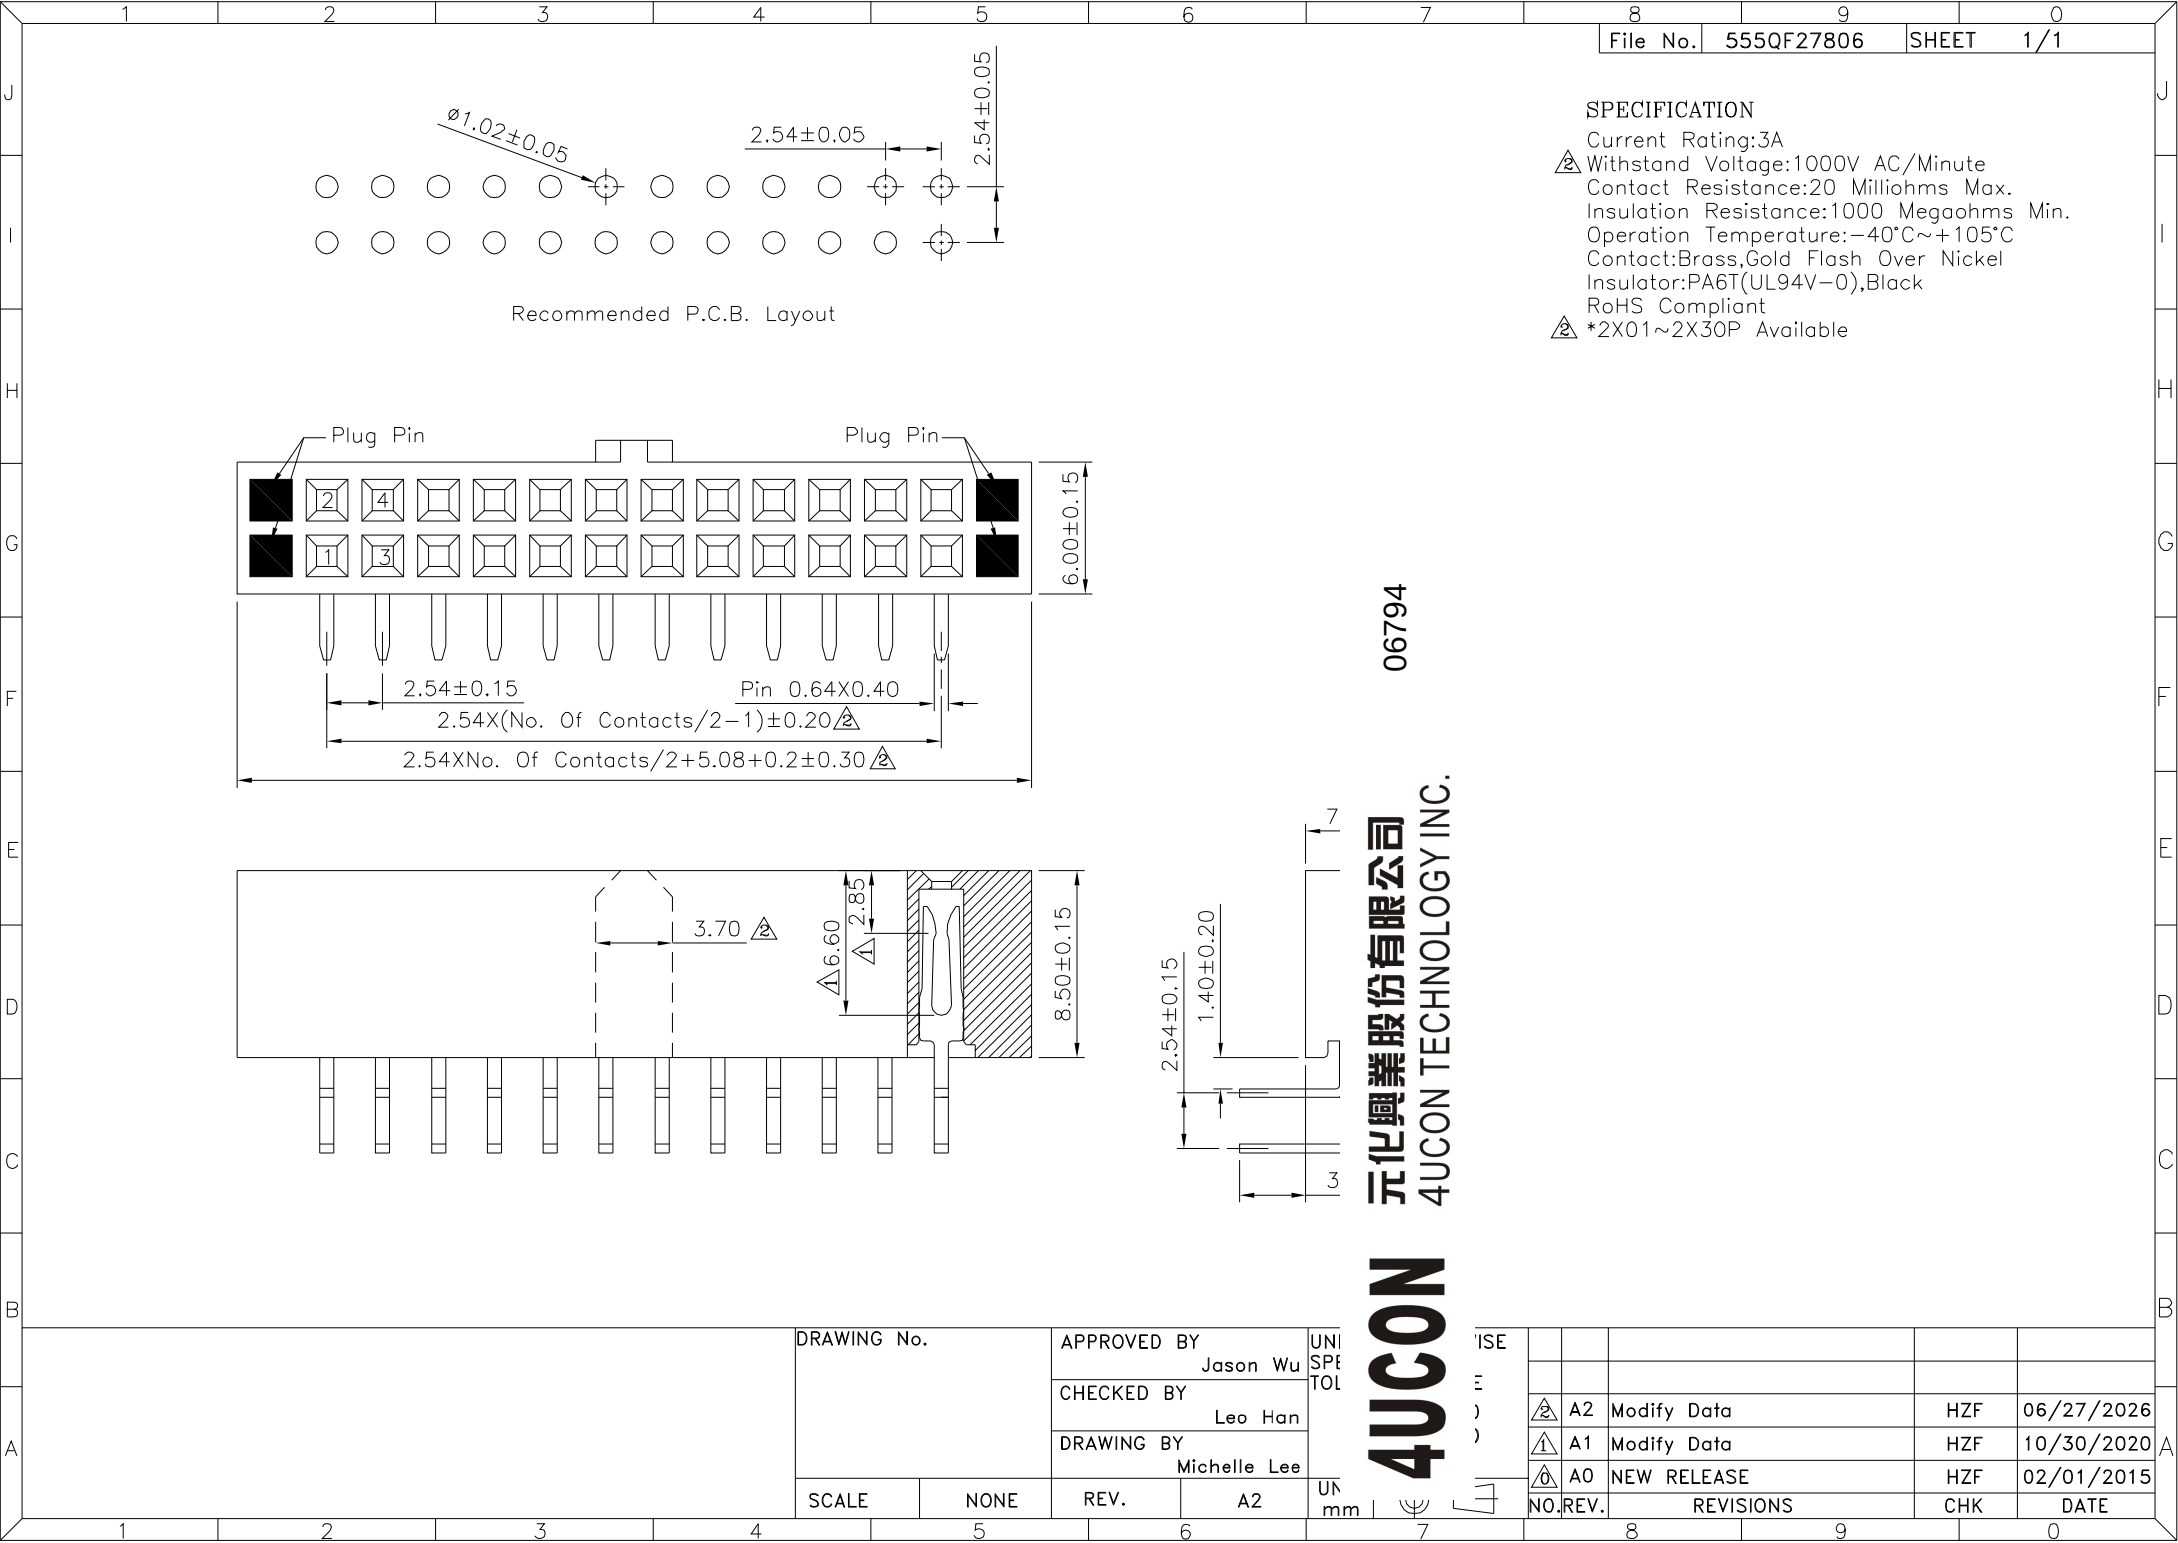

SPECIFICATION
Current Rating:3A
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant
*2X01~2X30P Available

06794

元化興業股份有限公司
4U CON TECHNOLOGY INC.

4U CON

DRAWING No.		APPROVED BY		UNI SPE TOL
		Jason Wu		
		CHECKED BY		
		Leo Han		UN mm
		DRAWING BY		
		Michelle Lee		
SCALE	NONE	REV.	A2	

ISE					
		A2	Modify Data	HZF	06/27/2026
		A1	Modify Data	HZF	10/30/2020
		A0	NEW RELEASE	HZF	02/01/2015
NO.	REV.	REVISIONS		CHK	DATE