


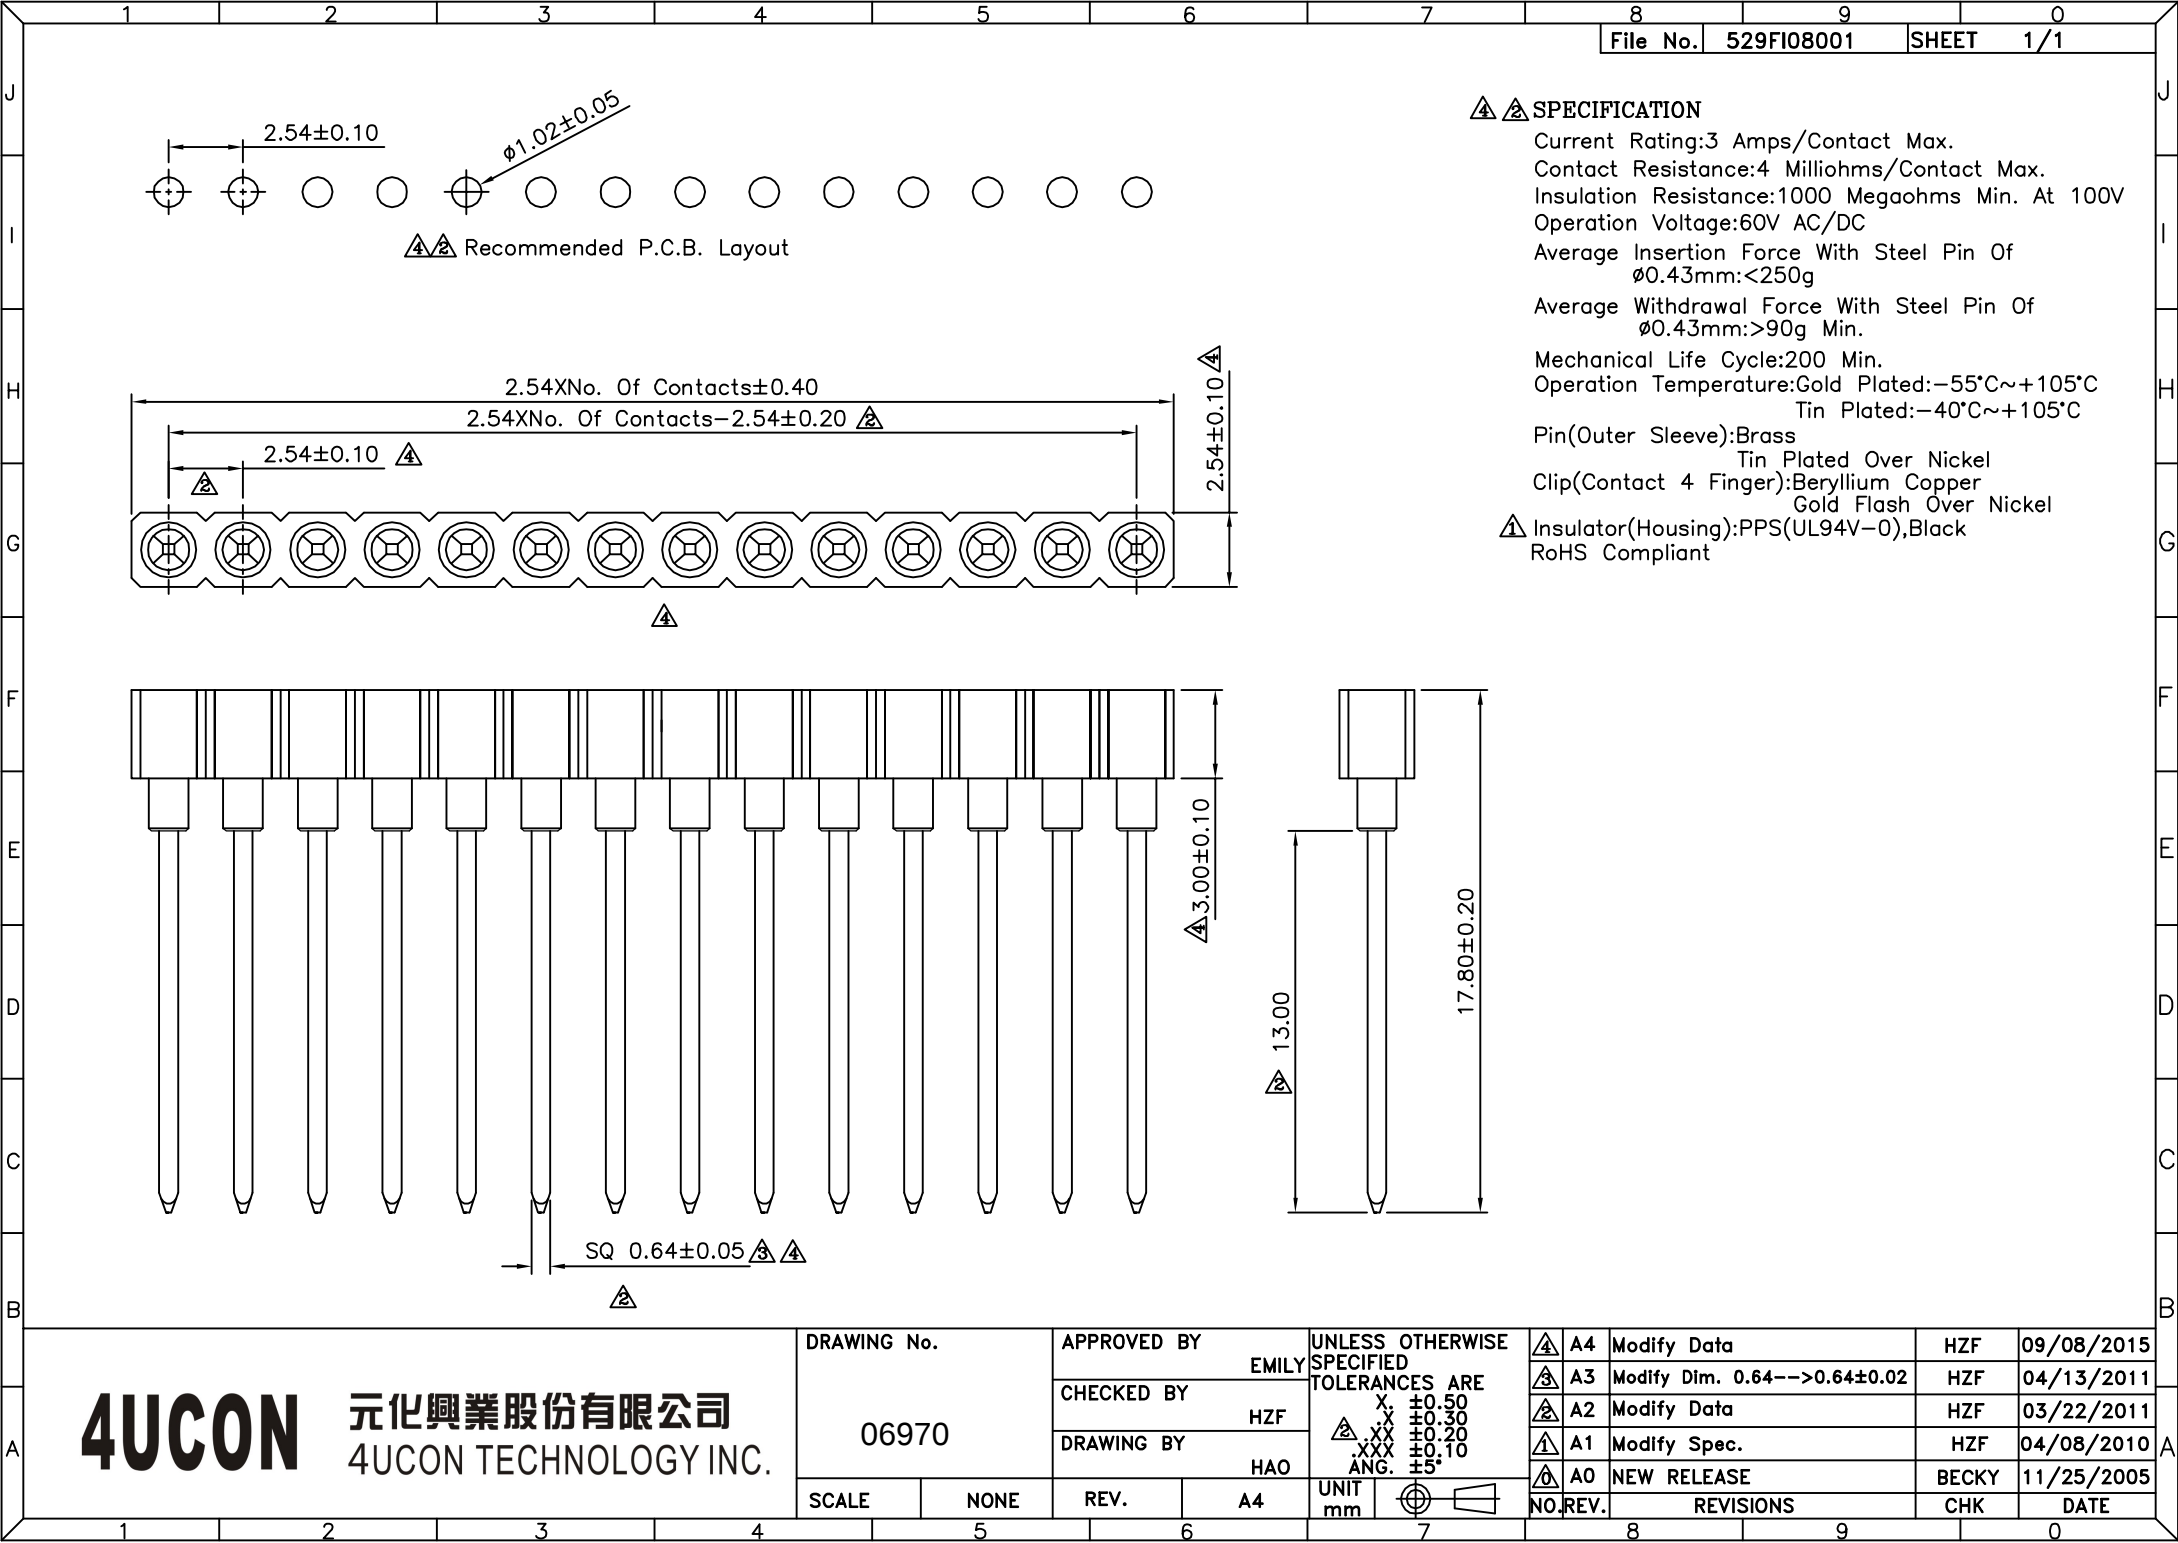

△△ SPECIFICATION

Current Rating:3 Amps/Contact Max.
Contact Resistance:4 Milliohms/Contact Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Voltage:60V AC/DC
Average Insertion Force With Steel Pin Of $\phi 0.43\text{mm}$:<250g
Average Withdrawal Force With Steel Pin Of $\phi 0.43\text{mm}$:>90g Min.
Mechanical Life Cycle:200 Min.
Operation Temperature:Gold Plated:-55°C~+105°C
Tin Plated:-40°C~+105°C
Pin(Outer Sleeve):Brass
Tin Plated Over Nickel
Clip(Contact 4 Finger):Beryllium Copper
Gold Flash Over Nickel
△ Insulator(Housing):PPS(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		EMILY	
		HAO	
06970		CHECKED BY	
		HZF	
		DRAWING BY	
SCALE		REV.	
NONE		A4	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ± 0.50
XX ± 0.30
XXX ± 0.20
ANG. $\pm 5^\circ$
UNIT mm

△ A4	Modify Data	HZF	09/08/2015
△ A3	Modify Dim. 0.64-->0.64±0.02	HZF	04/13/2011
△ A2	Modify Data	HZF	03/22/2011
△ A1	Modify Spec.	HZF	04/08/2010
△ A0	NEW RELEASE	BECKY	11/25/2005
NO. REV.	REVISIONS	CHK	DATE