


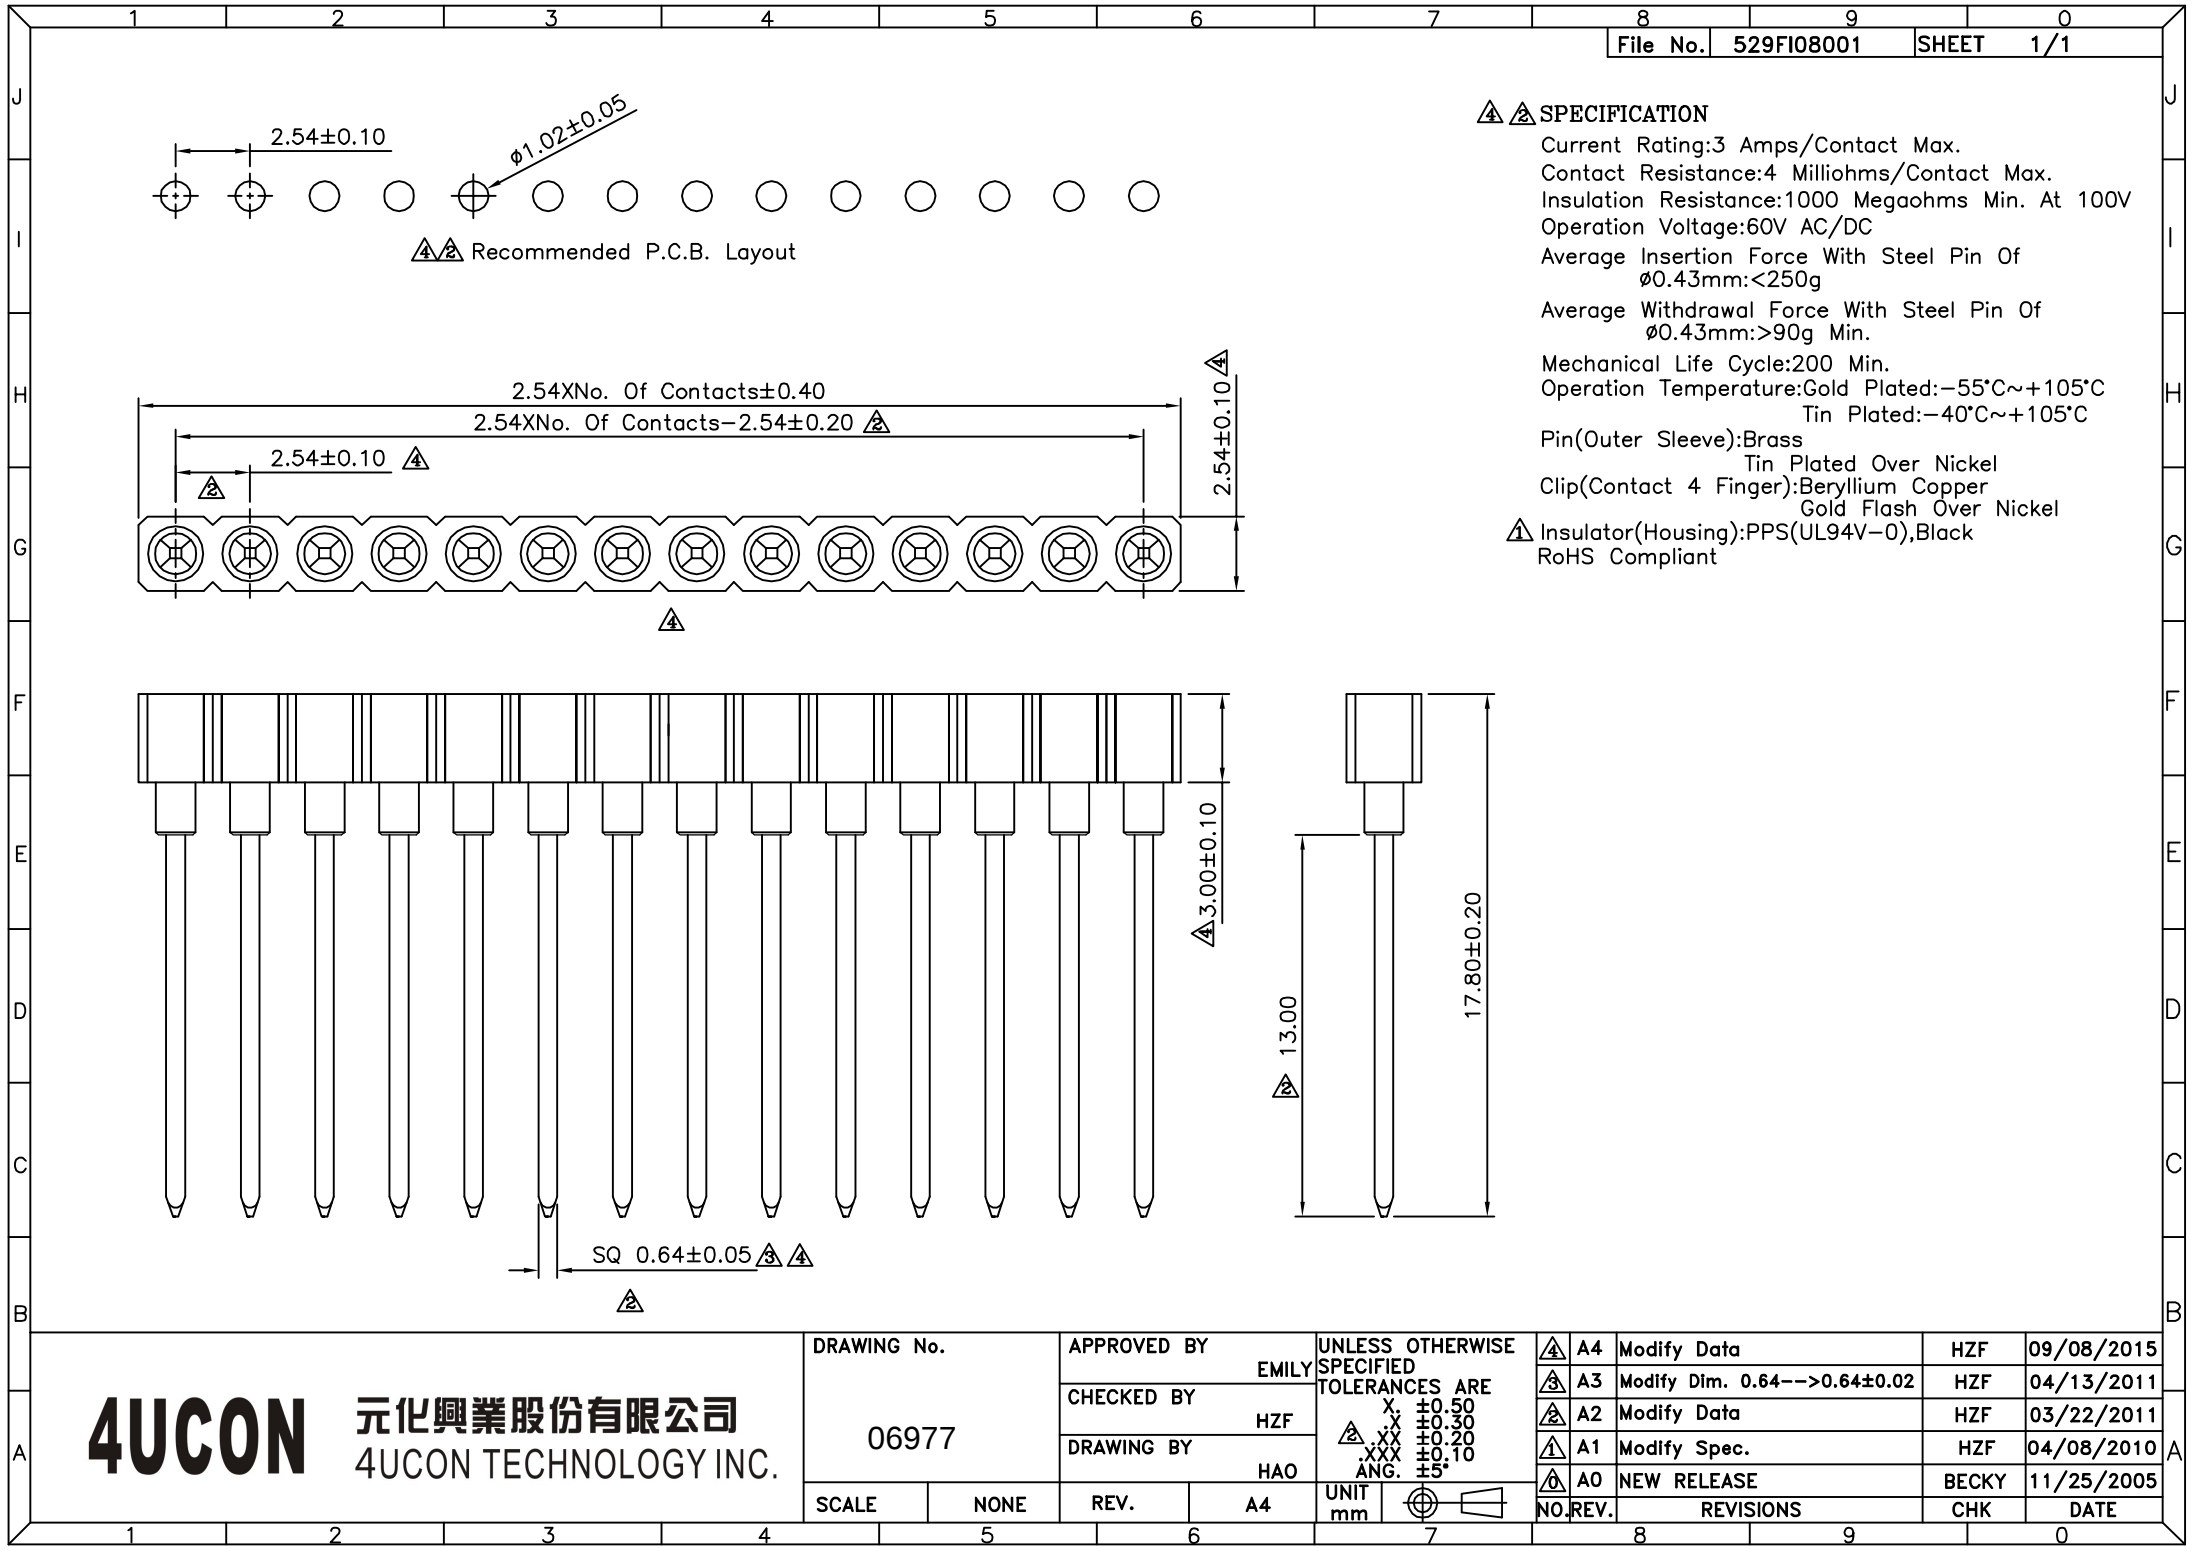

△△ SPECIFICATION

Current Rating:3 Amps/Contact Max.
Contact Resistance:4 Milliohms/Contact Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Voltage:60V AC/DC
Average Insertion Force With Steel Pin Of
ø0.43mm:<250g
Average Withdrawal Force With Steel Pin Of
ø0.43mm:>90g Min.
Mechanical Life Cycle:200 Min.
Operation Temperature:Gold Plated:-55°C~+105°C
Tin Plated:-40°C~+105°C
Pin(Outer Sleeve):Brass
Tin Plated Over Nickel
Clip(Contact 4 Finger):Beryllium Copper
Gold Flash Over Nickel
△ Insulator(Housing):PPS(UL94V-0),Black
RoHS Compliant