


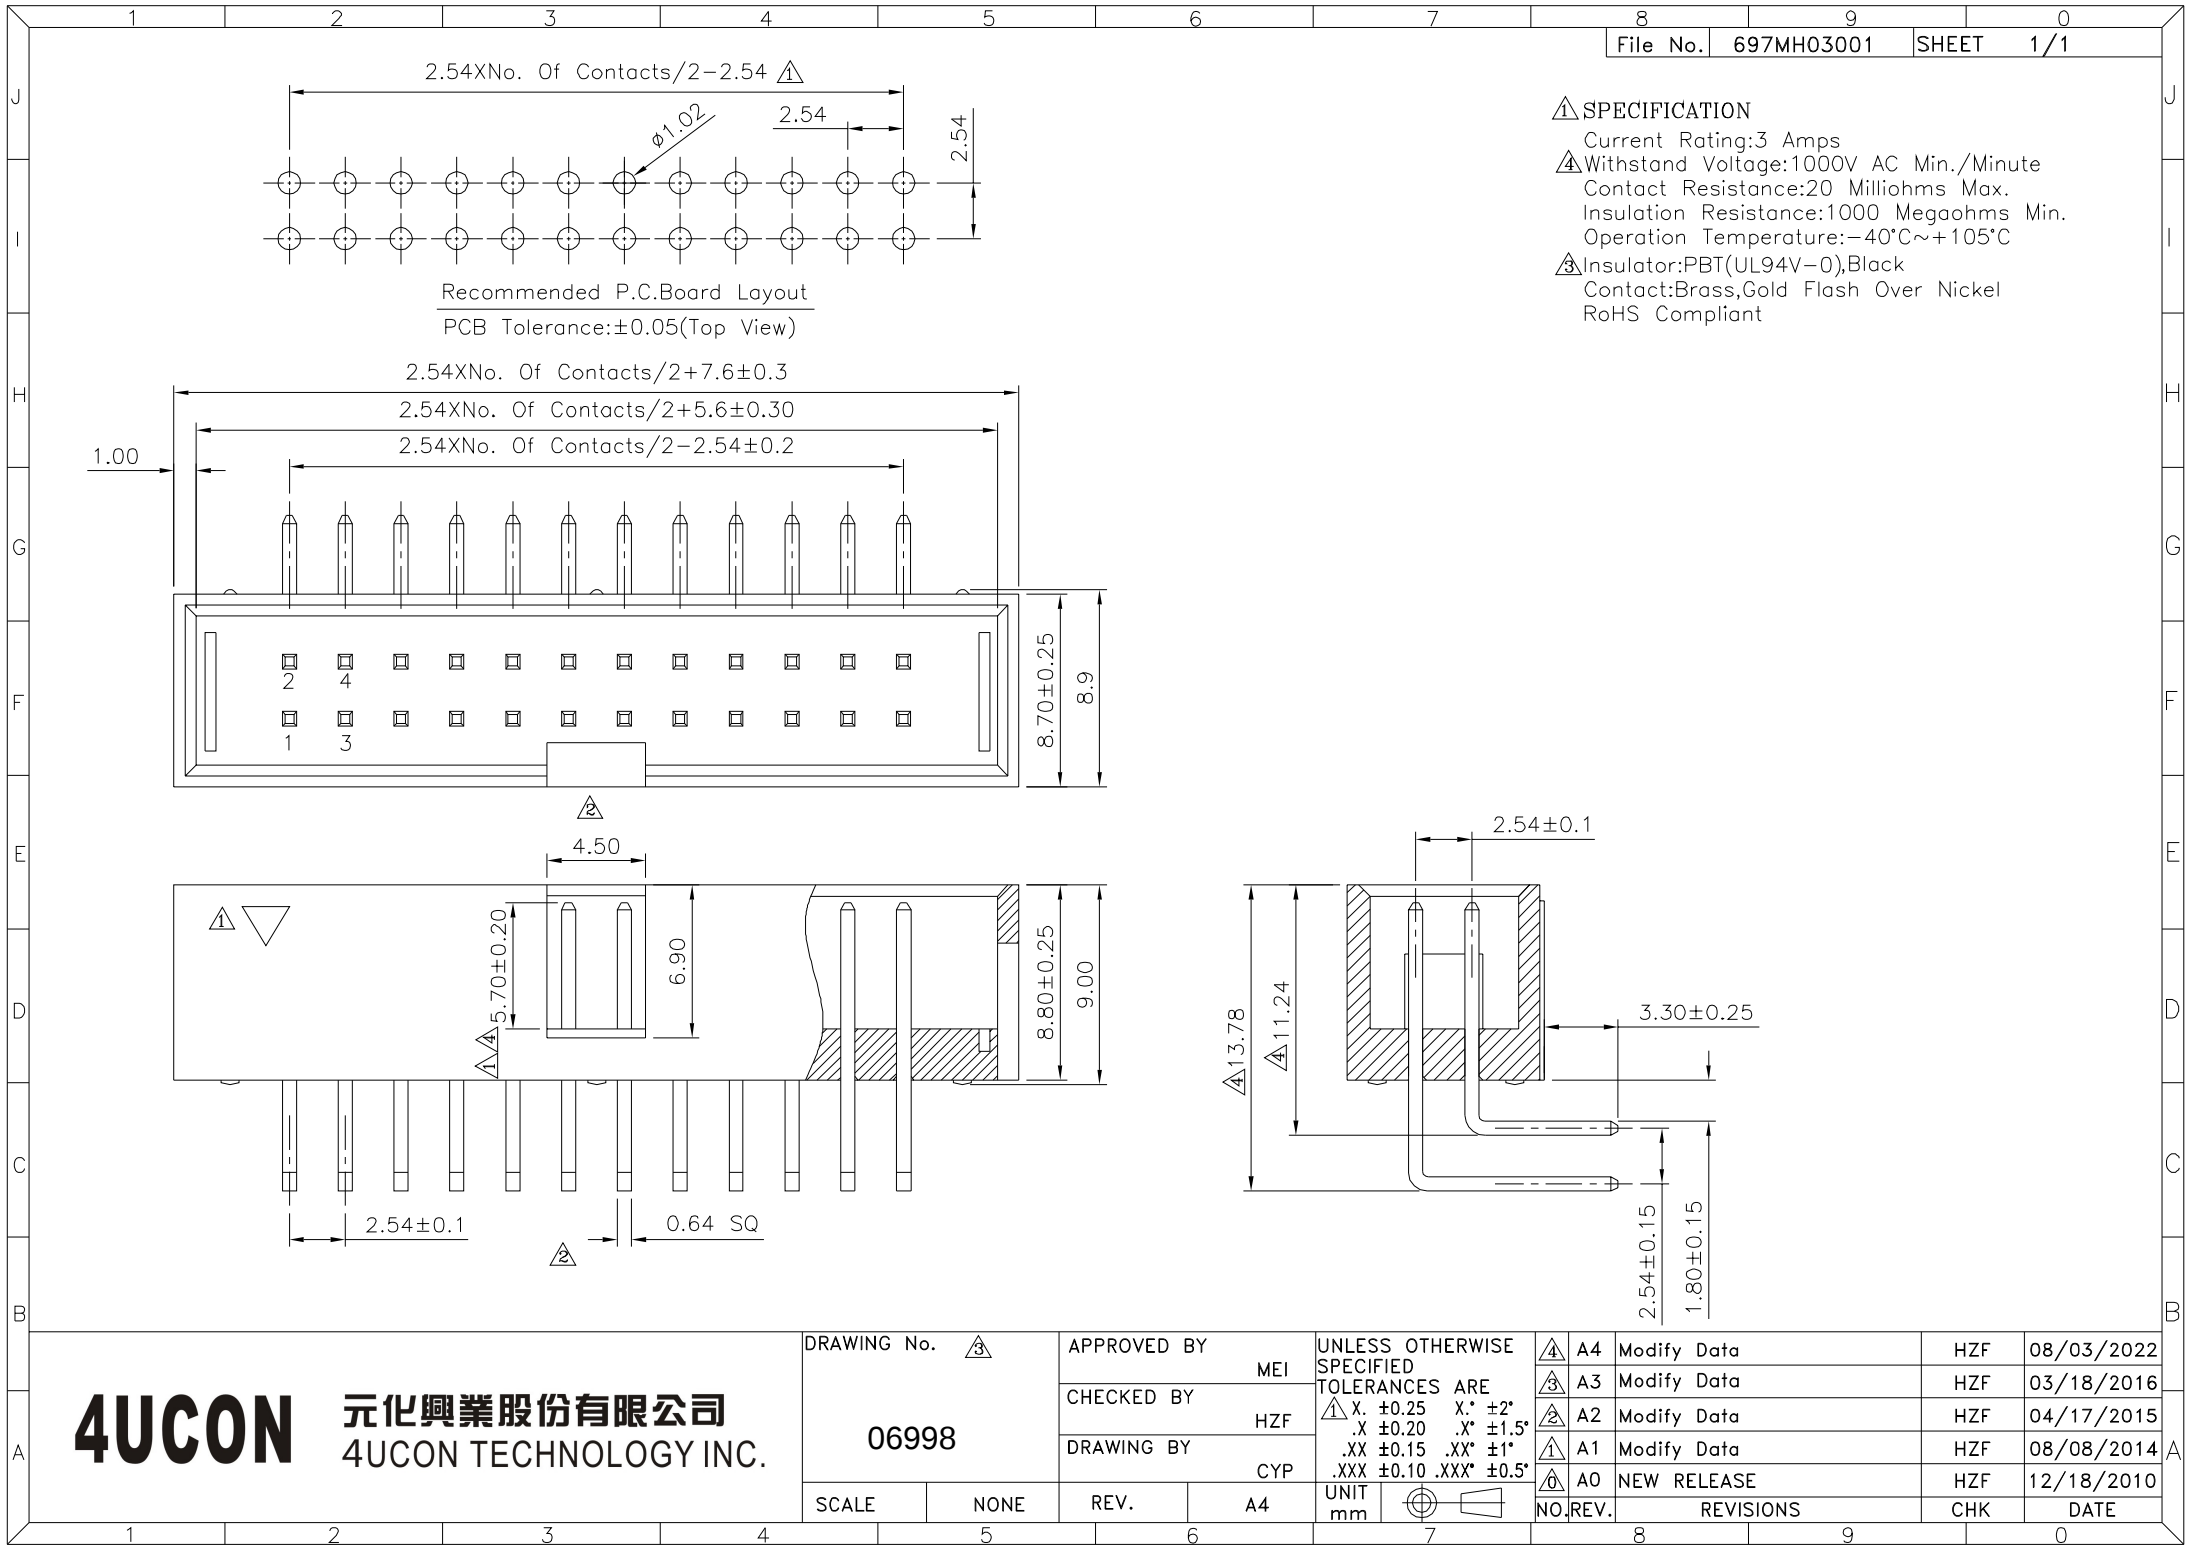

△ SPECIFICATION
Current Rating:3 Amps
△ Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
△ Insulator:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. △ 06998

APPROVED BY MEI
CHECKED BY HZF
DRAWING BY CYP

SCALE NONE REV. A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
△ X. ±0.25 X.* ±2*
.X ±0.20 .X* ±1.5*
.XX ±0.15 .XX* ±1*
.XXX ±0.10 .XXX* ±0.5*
UNIT mm

△ A4	Modify Data	HZF	08/03/2022
△ A3	Modify Data	HZF	03/18/2016
△ A2	Modify Data	HZF	04/17/2015
△ A1	Modify Data	HZF	08/08/2014
△ A0	NEW RELEASE	HZF	12/18/2010
NO. REV.	REVISIONS	CHK	DATE