

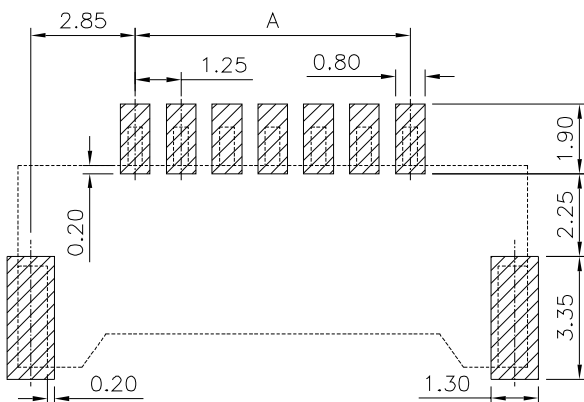
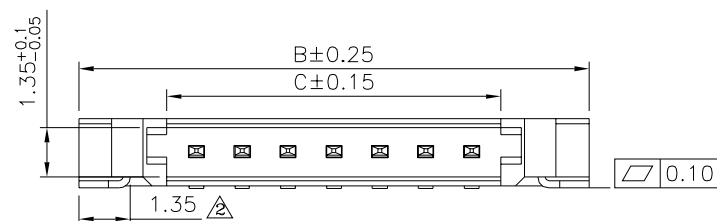




SPECIFICATION

Current Rating:1A AC/DC
Voltage Rating:125V AC/DC
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:100 Megaohms Min.
Temperature Range:-40°C~+105°C
Insulator:PA9T(UL94V-0),Nature
Contact:Phosphor Bronze,Gold Flash Over
All,Over Nickel
Solder Nail:Brass,Gold Flash Over Nickel
RoHS Compliant

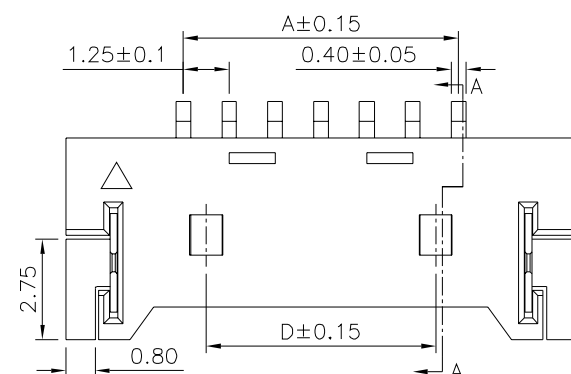

Recommended P.C.B. Layout
(General Tolerance±0.05)

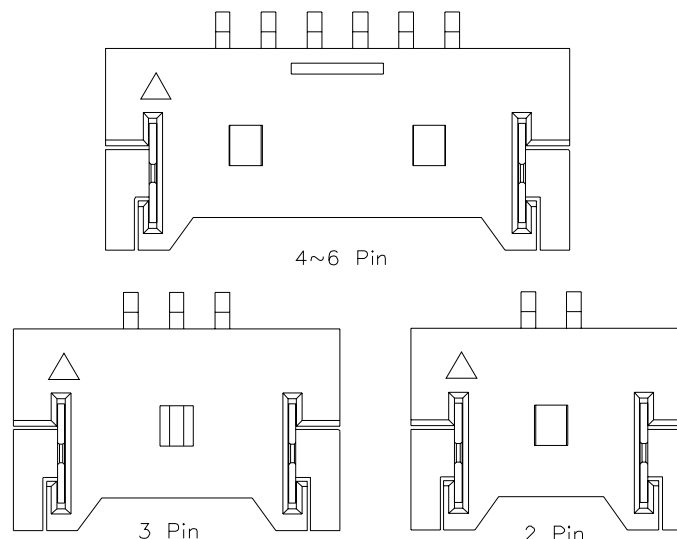

Pin	A	B	C	D
02	1.25	7.65	2.85	
03	2.50	8.90	4.10	
04	3.75	10.15	5.35	2.50
05	5.00	11.40	6.60	3.75
06	6.25	12.65	7.85	5.00
07	7.50	13.90	9.10	6.25
08	8.75	15.15	10.35	7.50
09	10.00	16.40	11.60	8.75
10	11.25	17.65	12.85	10.00
12	13.75	20.15	15.35	12.50
14	16.25	22.65	17.85	15.00
15	17.50	23.90	19.10	16.25
18	21.25	27.65	22.85	20.00
20	23.75	30.15	25.35	22.50
30	36.25	42.65	37.85	22.50

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 07018

07018

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

REV. A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±2°

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	07/29/2024
2	A2	Modify Data	HZF	04/09/2021
1	A1	Modify Data	HZF	01/26/2018
0	A0	NEW RELEASE	HZF	05/03/2016