

SPECIFICATION

Current Rating:13A(2~4P),11A(6~15P)

Voltage Rating:600V


Dielectric Withstanding Voltage:5000V AC/Minute

Ambient Temperature Rise:-55°C~+105°C

⚠ Insulator:PA66 (UL94V-2),Nature

Contact:Phosphor Bronze,Tin Plated

RoHS Compliant












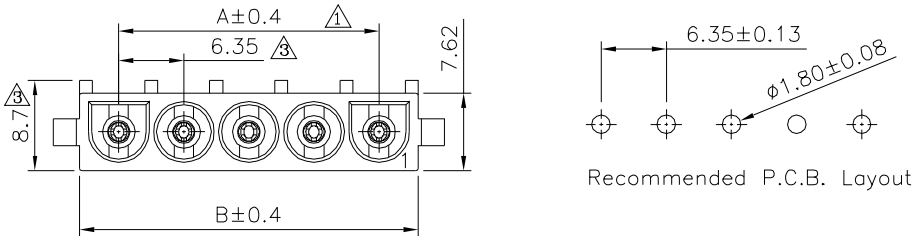


⚠⚠ 1X02~1X10

Pin	A	B
02	6.35	13.97
03	12.70	20.32
04	19.05	26.67
05	25.40	33.02
06	31.75	39.37
07	38.10	45.72
08	44.45	52.07
09	50.80	58.42
10	57.15	64.77

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. <u>2</u> <u>0</u>		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.4 .XX ±0.25 .XXX ±0.08		<u>3</u> B3	Modify Data	HZF	05/30/2021	
		MEI				<u>2</u> B2	Modify Data	HZF	10/24/2016	
		CHECKED BY				<u>1</u> B1	Modify Data	HZF	05/16/2013	
		HZF				<u>0</u> B0	Modify Data	HZF	12/01/2009	
		DRAWING BY				<u>0</u> B0	NEW RELEASE	HZF	12/01/2009	
CYP										
SCALE	NONE	REV.	B3	UNIT mm		NO.	REV.	REVISIONS	CHK	DATE

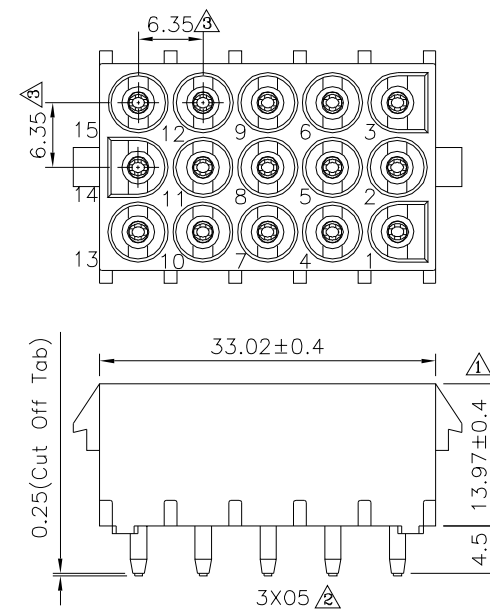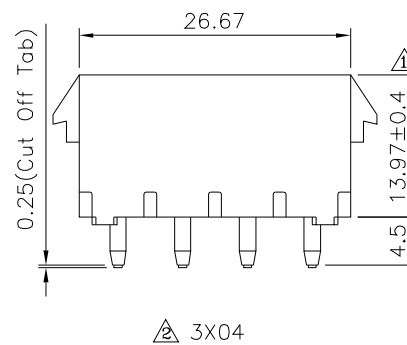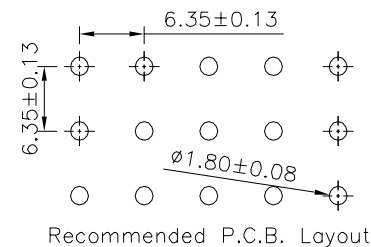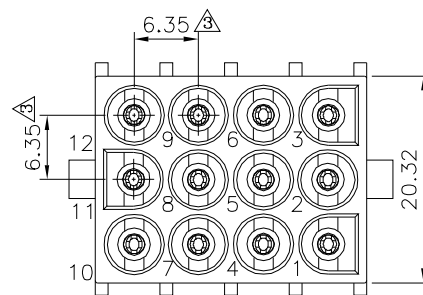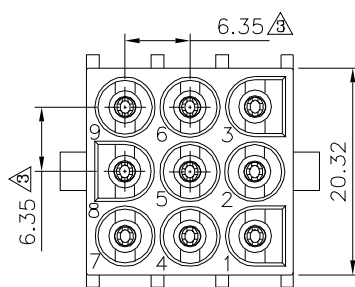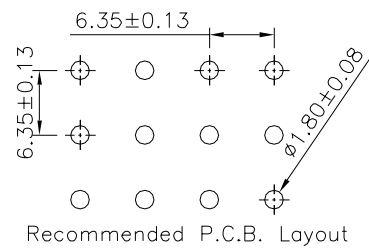

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 07027

07027

SCALE

NONE

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.4
.XX ±0.25
.XXX ±0.08

UNIT
mm



NO. REV.

B3 Modify Data
B2 Modify Data
B1 Modify Data
B0 Modify Data
B0 NEW RELEASE

REVISIONS

CHK DATE