

SPECIFICATION

Current Rating:13A(2~4P),11A(6~15P)

Voltage Rating:600V


Dielectric Withstanding Voltage:5000V AC/Minute

Ambient Temperature Rise:-55°C~+105°C

⚠ Insulator:PA66 (UL94V-2),Nature

Contact:Phosphor Bronze,Tin Plated














RoHS Compliant

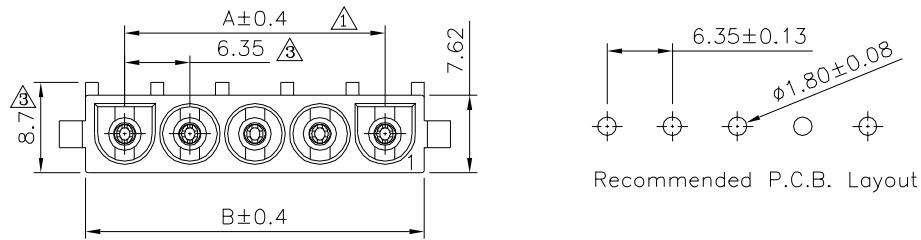

Pin	A	B
02	6.35	13.97
03	12.70	20.32
04	19.05	26.67
05	25.40	33.02
06	31.75	39.37
07	38.10	45.72
08	44.45	52.07
09	50.80	58.42
10	57.15	64.77

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. <u> </u> <u> </u> <u> </u> 07028		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.4 .XX ±0.25 .XXX ±0.08	<u> </u> B3	Modify Data	HZF	05/30/2021	
		MEI			<u> </u> B2	Modify Data	HZF	10/24/2016	
		CHECKED BY			<u> </u> B1	Modify Data	HZF	05/16/2013	
		HZF			<u> </u> B0	Modify Data	HZF	12/01/2009	
		DRAWING BY			<u> </u> B0	NEW RELEASE	HZF	12/01/2009	
		CYP							
SCALE	NONE	REV.	B3	UNIT mm		NO. REV.	REVISIONS	CHK	DATE

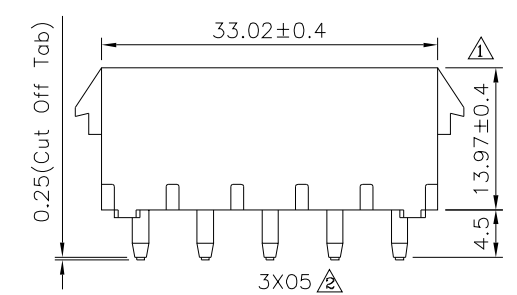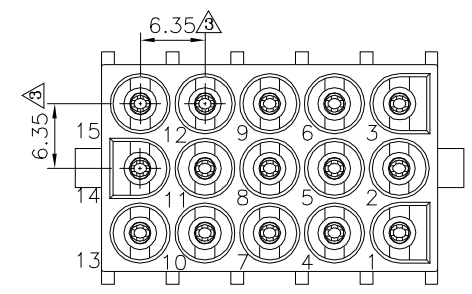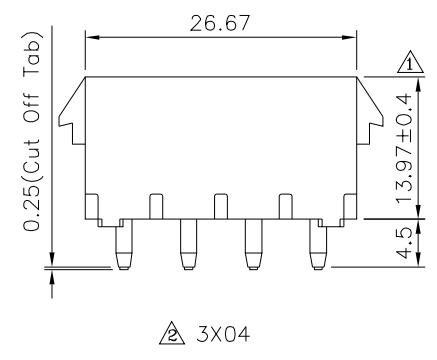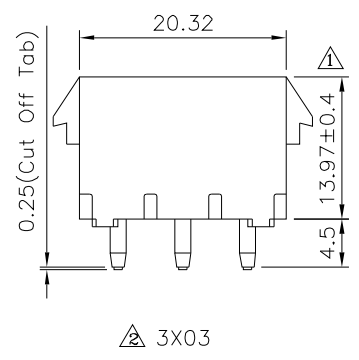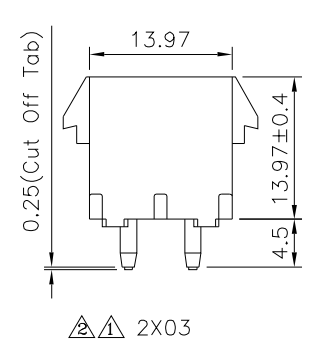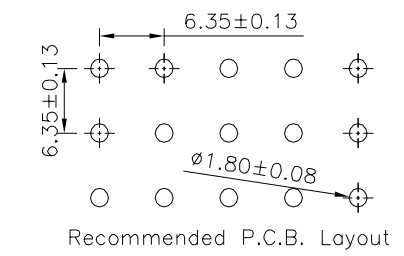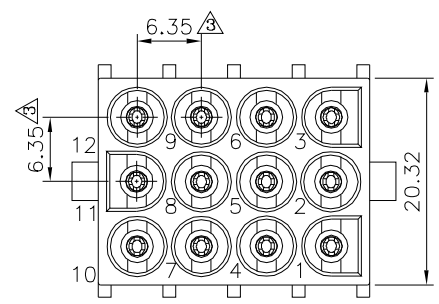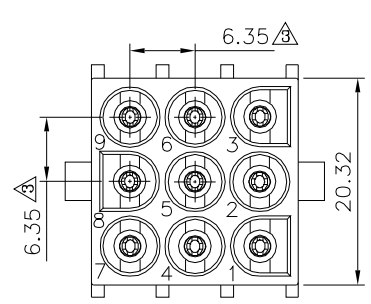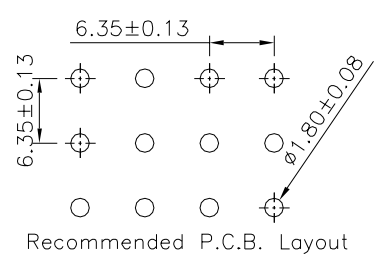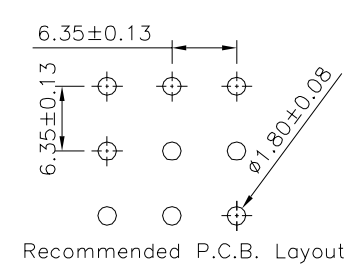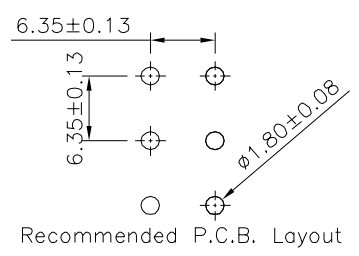

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 07028

APPROVED BY MEI
CHECKED BY HZF
DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.4
.XX ±0.25
.XXX ±0.08

NO.	REV.	REVISIONS	CHK	DATE
B3		Modify Data	HZF	05/30/2021
B2		Modify Data	HZF	10/24/2016
B1		Modify Data	HZF	05/16/2013
B0		Modify Data	HZF	12/01/2009
B0		NEW RELEASE	HZF	12/01/2009

