

SPECIFICATION

Current Rating:13A(2~4P),11A(6~15P)

Voltage Rating:600V


Dielectric Withstanding Voltage:5000V AC/Minute

Ambient Temperature Rise:-55°C~+105°C

⚠ Insulator:PA66 (UL94V-2),Nature

Contact:Phosphor Bronze,Tin Plated










RoHS Compliant

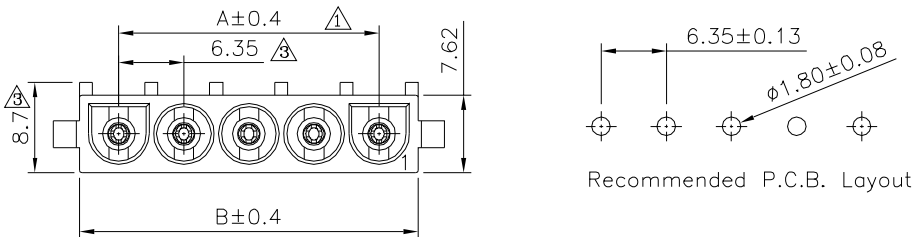

Pin	A	B
02	6.35	13.97
03	12.70	20.32
04	19.05	26.67
05	25.40	33.02
06	31.75	39.37
07	38.10	45.72
08	44.45	52.07
09	50.80	58.42
10	57.15	64.77

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. <u>2</u> <u>0</u>		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.4 .XX ±0.25 .XXX ±0.08		<u>3</u> B3	Modify Data	HZF	05/30/2021
		MEI				<u>2</u> B2	Modify Data	HZF	10/24/2016
		CHECKED BY				<u>1</u> B1	Modify Data	HZF	05/16/2013
		HZF				<u>0</u> B0	Modify Data	HZF	12/01/2009
07030		DRAWING BY		CYP		<u>0</u> B0	NEW RELEASE	HZF	12/01/2009
SCALE	NONE	REV.	B3	UNIT mm		NO. REV.	REVISIONS	CHK	DATE

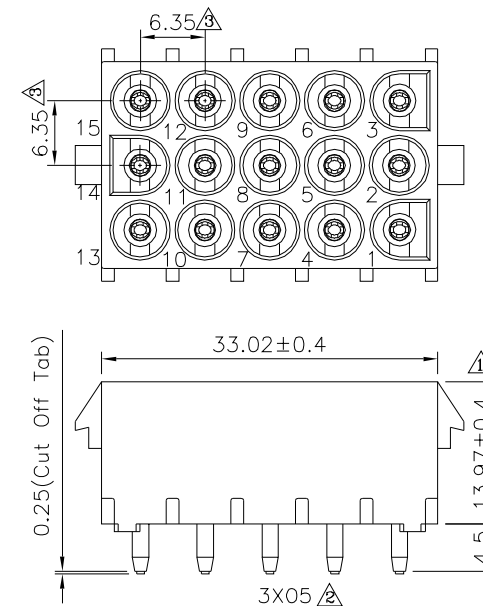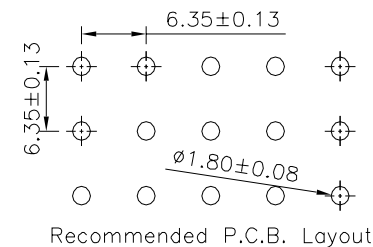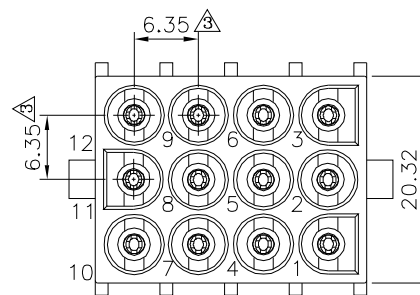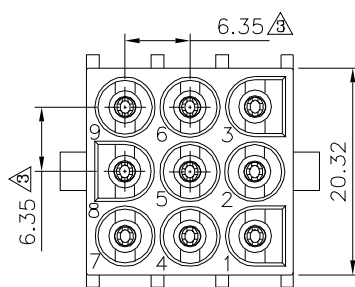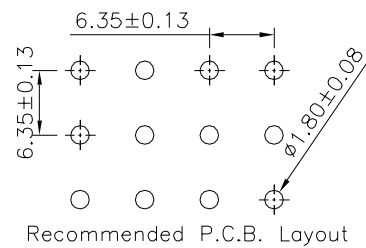

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 07030

07030

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.4
.XX ±0.25
.XXX ±0.08

UNIT
mm



NO. REV.

B3

Modify Data

B2

Modify Data

B1

Modify Data

B0

NEW RELEASE

REVISIONS

CHK

DATE

HZF

HZF

HZF

HZF

HZF

HZF

HZF

05/30/2021

10/24/2016

05/16/2013

12/01/2009

12/01/2009

12/01/2009

12/01/2009

12/01/2009

12/01/2009