

SPECIFICATION

Current Rating:13A(2~4P),11A(6~15P)

Voltage Rating:600V



Dielectric Withstanding Voltage:5000V AC/Minute

Ambient Temperature Rise:-55°C~+105°C














⚠ Insulator:PA66 (UL94V-2),Nature

Contact:Phosphor Bronze,Tin Plated

RoHS Compliant

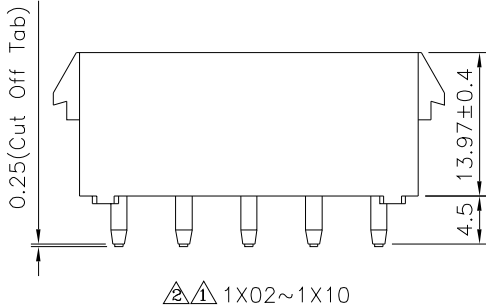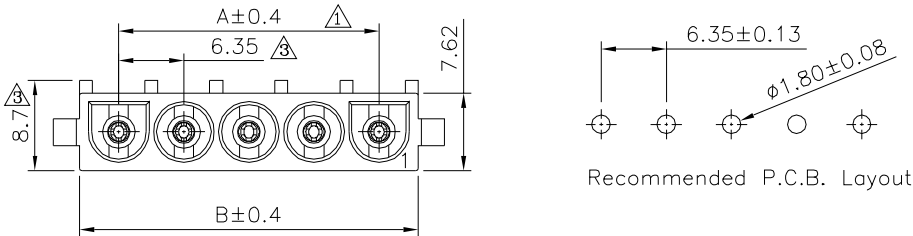

Pin	A	B
02	6.35	13.97
03	12.70	20.32
04	19.05	26.67
05	25.40	33.02
06	31.75	39.37
07	38.10	45.72
08	44.45	52.07
09	50.80	58.42
10	57.15	64.77

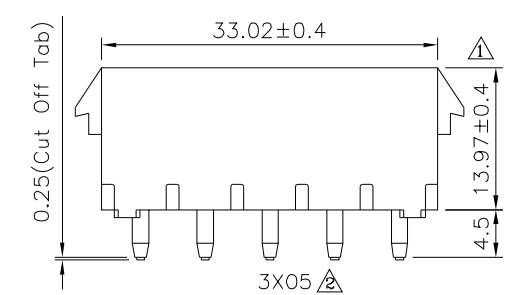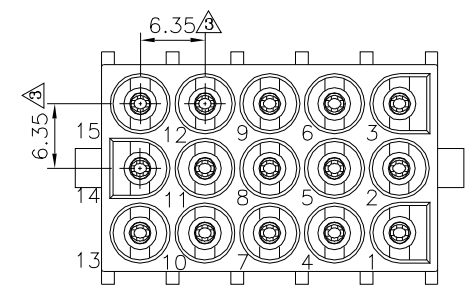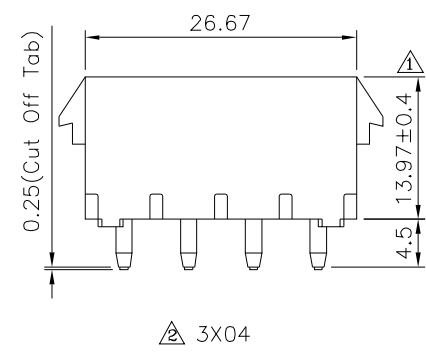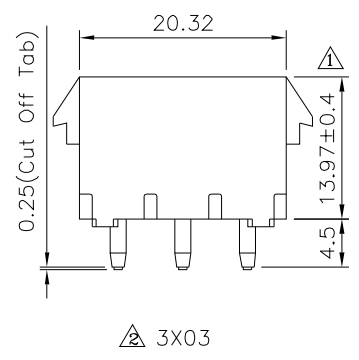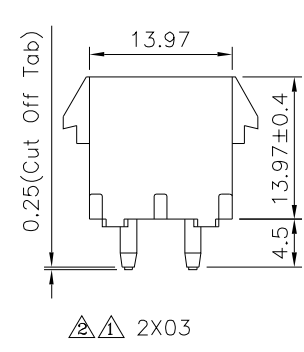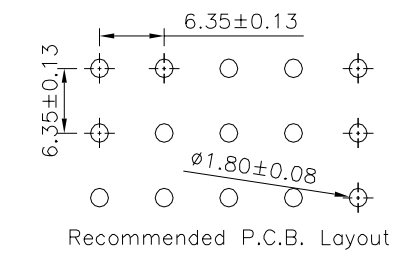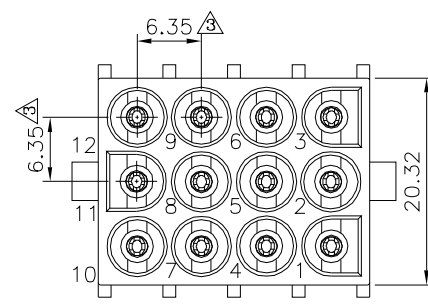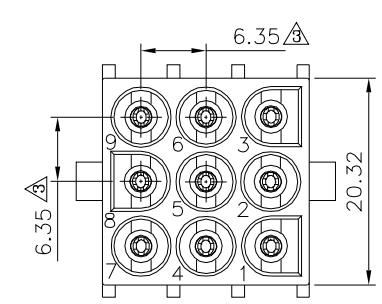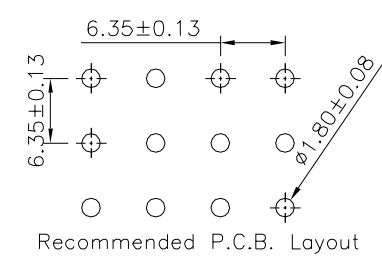

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 07031
SCALE NONE

APPROVED BY MEI
CHECKED BY HZF
DRAWING BY CYP
REV. B3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.4
.XX ±0.25
.XXX ±0.08
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
B3		Modify Data	HZF	05/30/2021
B2		Modify Data	HZF	10/24/2016
B1		Modify Data	HZF	05/16/2013
B0		Modify Data	HZF	12/01/2009
B0		NEW RELEASE	HZF	12/01/2009