



SPECIFICATION



Current Rating:12A AC/DC
Voltage Rating:300V AC/DC
Withstanding Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+90°C
Material:PA66(UL94V-2)
RoHS Compliant




1X01






1X02





1X03




1X04

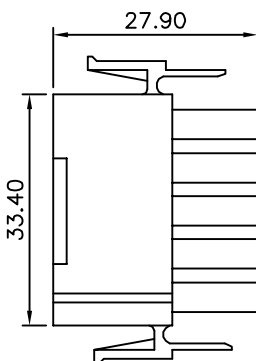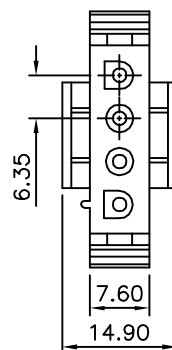



1X05

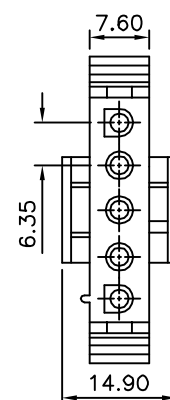


2X03






3X03



3X04



3X05

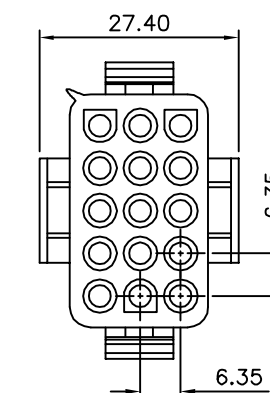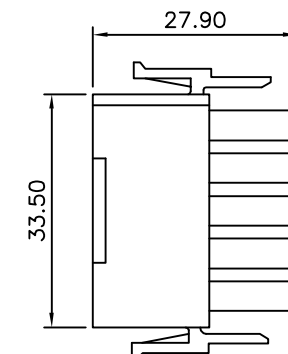

DRAWING No.

07040

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

SONG

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.3
.XX ± 0.3 ANG.

UNIT
mm



SCALE

NONE

REV.

A1

NO. REV.

REVISIONS

CHK

DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

A1	Modify Data	HZF	11/09/2012
A0	NEW RELEASE		