



SPECIFICATION


Current Rating:12A AC/DC
Voltage Rating:300V AC/DC
Withstanding Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+90°C
Material:PA66(UL94V-2)
RoHS Compliant

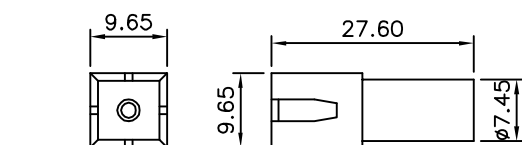


1X01

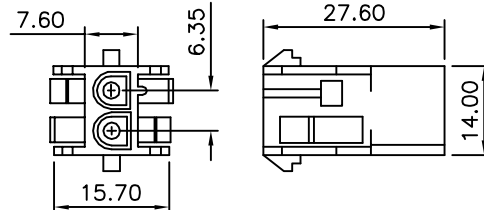


1X02

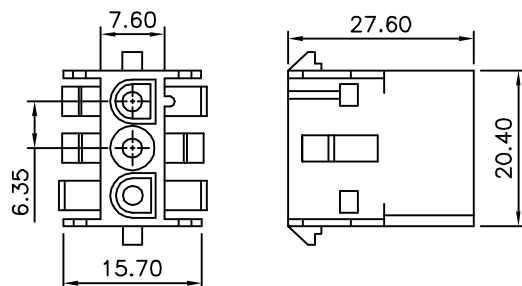


1X03

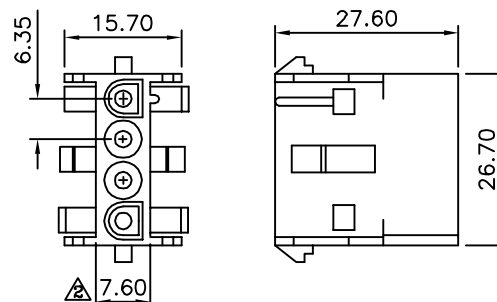



1X04

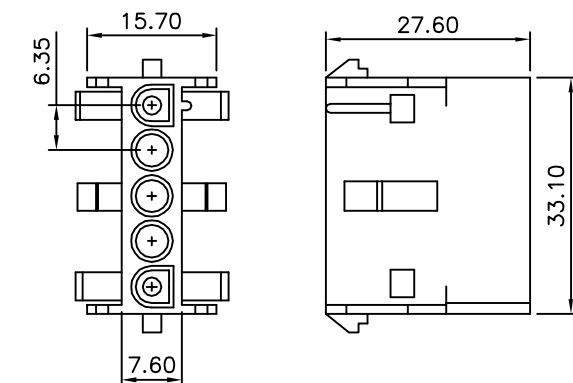



1X05





2X03




3X03

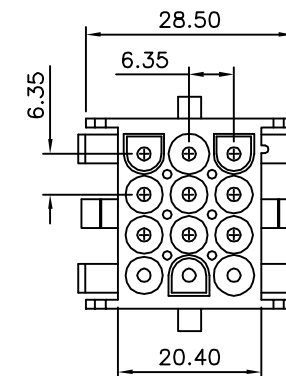

3X04

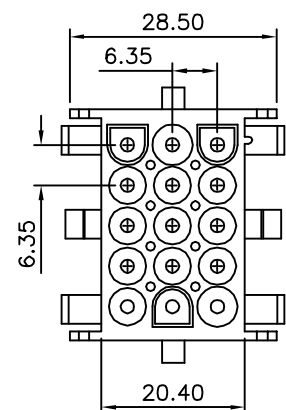

3X05



4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

07048

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.3
.XX ±0.3
ANG.

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	11/09/2012
△A1		Modify Data	HZF	06/20/2011
△A0		NEW RELEASE		