

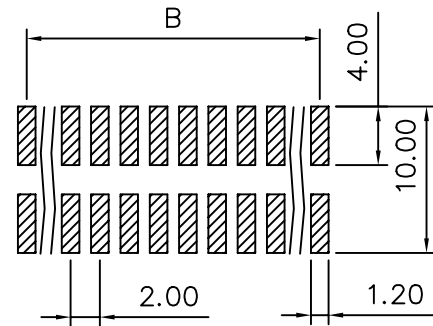
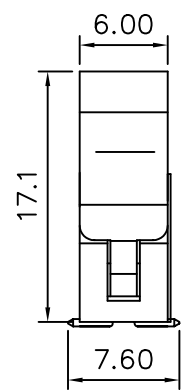


SPECIFICATIONS
 Current Rating: 1 AMP Max.
 Dielectric Withstanding Voltage:
 500V AC R.M.S. For One Minute
 Insulation Resistance: 1000 Megohms Min.
 At 500V DC
 Operating Temperature: -40°C To +85°C
 Housing: Thermoplastic (UL 94V-0), Black
 Contact: S.Q.0.50mm Copper Alloy

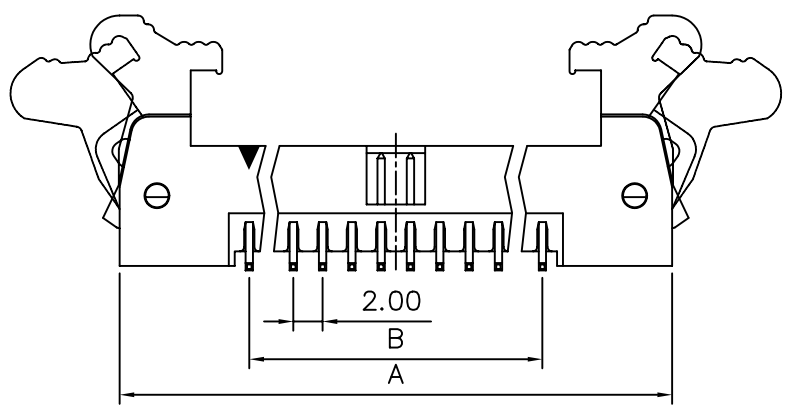

Recommend PCB Layout
 Top View

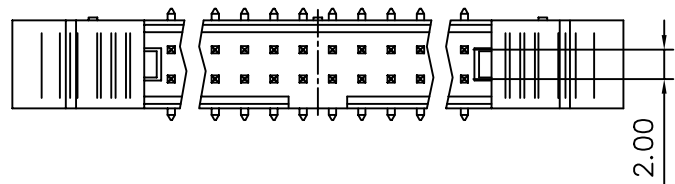

Pos.	A	B
10	25.70	8.00
12	27.70	10.00
14	29.70	12.00
16	31.70	14.00
20	35.70	18.00
22	37.70	20.00
24	39.70	22.00
26	41.70	24.00
30	45.70	28.00
32	47.70	30.00
34	49.70	32.00
40	55.70	38.00
44	59.70	42.00
50	65.70	48.00
68	83.70	66.00

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.


DRAWING No.
 07171

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 ANG.

SCALE NONE REV.

UNIT mm



AREA REVISIONS CHK DATE