

△ SPECIFICATION

Current Range:

Non-Switching:100mA 50V DC

Switching:25mA 24V DC

Withstanding Voltage:500V AC 50Hz Or
60Hz For 1 Minute

Contact Resistance:50 Milliohms Max.(Initial)


Insulation Resistance:100 Megaohms Min.
At 500V DC,60s±5s

Operation Temperature Range:-40°C~+85°C

Operation Force:9.8N Max.


Switch Position:Off Type

RoHS Compliant

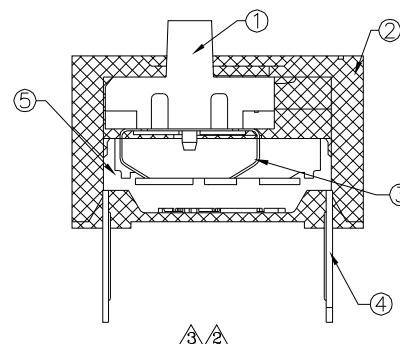

Pin	A	B
1	3.90	2.54
2	6.44	5.08
3	8.98	7.62
4	11.52	10.16
5	14.06	12.70
6	16.60	15.24
7	19.14	17.78
8	21.68	20.32
9	24.22	22.86
10	26.76	25.40
12	31.84	27.94

Schematic(Typ.)

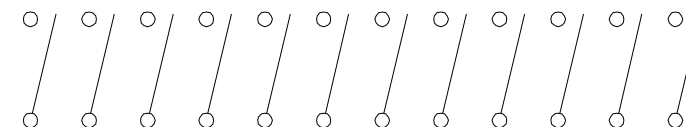

△ (1,2,3,4,5,6,7,8,9,10,12 Pos Avail)

① ② ③ ④ ⑤	⑤	Base	1	PA66,UL94V-0	Black
	④	Terminal	-	Brass	Gold Plated Over Nickel
	③	Contact	-	Copper Alloy	Gold Plated Over Nickel
	②	Cover	1	PBT,UL94V-0	Blue
	①	Actuator	-	PBT,UL94V-0	White
No.		Description	Q'ty	Material	Remark

△
△

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
~10 ±0.10
10~ ±0.20

△
△
△

B3
B2
B1
B0

Modify Data
Modify Data
Modify Data
NEW RELEASE

HZF
HZF
HZF
HZF

06/09/2023
07/10/2018
05/12/2016
10/10/2013



NO. REV.

REVISIONS

CHK

DATE

△ Recommended P.C.B. Layout

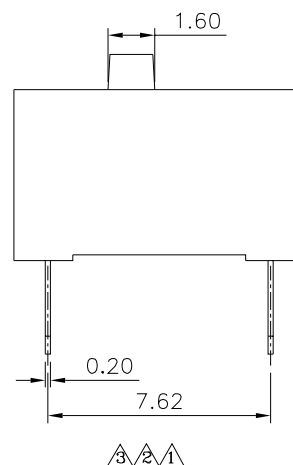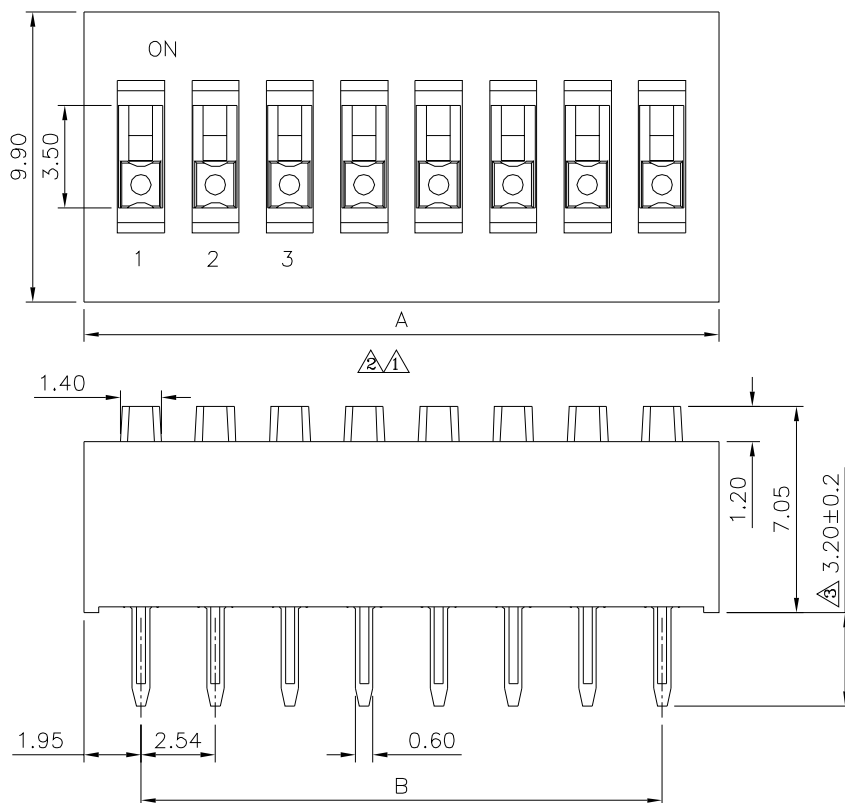

DRAWING No. △

07237


SCALE

NONE

REV.

B3

UNIT
mm



APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.