



△ SPECIFICATION

Current Range:
 Non-Switching:100mA 50V DC
 Switching:25mA 24V DC
 Withstanding Voltage:500V AC 50Hz Or
 60Hz For 1 Minute
 Contact Resistance:50 Milliohms Max.(Initial)
 Insulation Resistance:100 Megaohms Min.
 At 500V DC,60s±5s
 Operation Temperature Range:-40°C~+85°C
 Operation Force:9.8N Max.
 Switch Position:Off Type
 RoHS Compliant

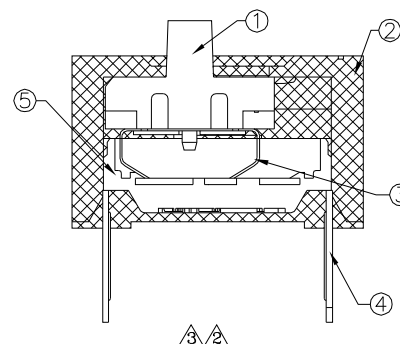

Pin	A	B
1	3.90	2.54
2	6.44	5.08
3	8.98	7.62
4	11.52	10.16
5	14.06	12.70
6	16.60	15.24
7	19.14	17.78
8	21.68	20.32
9	24.22	22.86
10	26.76	25.40
12	31.84	27.94


Schematic(Typ.)

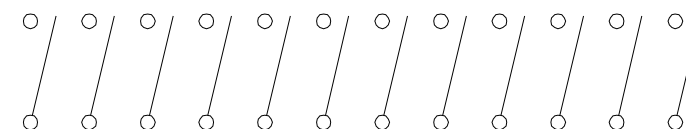




△ (1,2,3,4,5,6,7,8,9,10,12 Pos Avail)

⑤	Base	1	PA66,UL94V-0	Black
④	Terminal	-	Brass	Gold Plated Over Nickel
③	Contact	-	Copper Alloy	Gold Plated Over Nickel
②	Cover	1	PBT,UL94V-0	Blue
①	Actuator	-	PBT,UL94V-0	White
No.	Description	Q'ty	Material	Remark

△△△

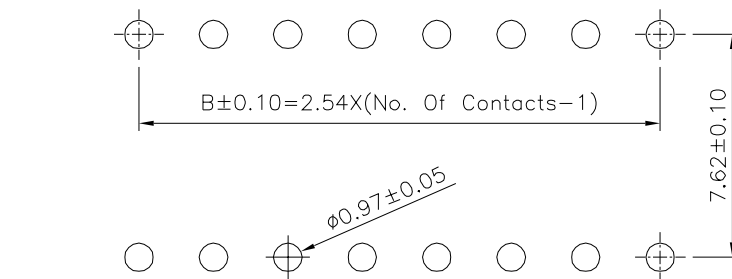

△ Recommended P.C.B. Layout

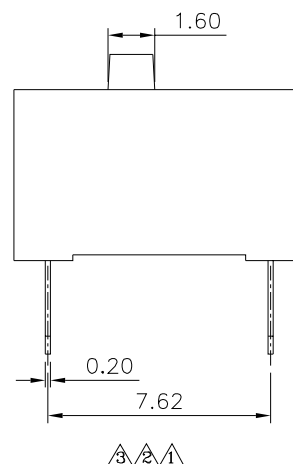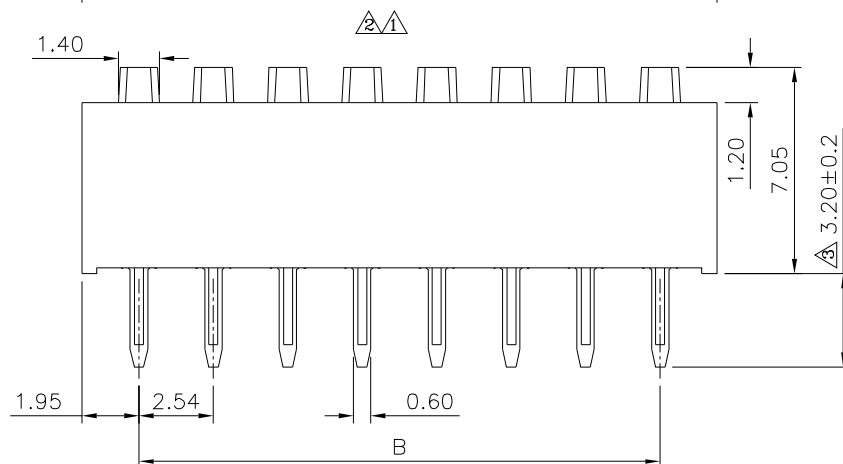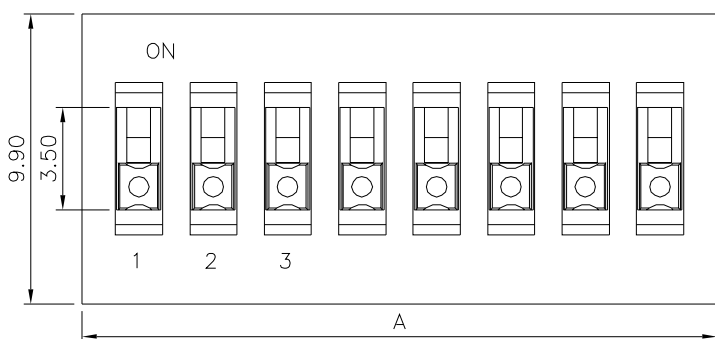

DRAWING No. △

07243


SCALE

NONE

REV.

B3

UNIT mm



APPROVED BY
 MEI
 CHECKED BY
 HZF
 DRAWING BY
 CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 ~10 ± 0.10
 10~ ± 0.20

△ B3
 △ B2
 △ B1
 △ B0

Modify Data
 Modify Data
 Modify Data
 NEW RELEASE

HZF
 HZF
 HZF
 HZF

06/09/2023
 07/10/2018
 05/12/2016
 10/10/2013

NO. REV.

REVISIONS

CHK

DATE

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.