

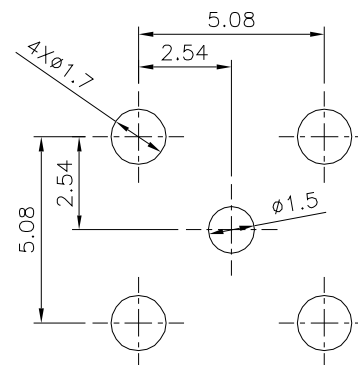


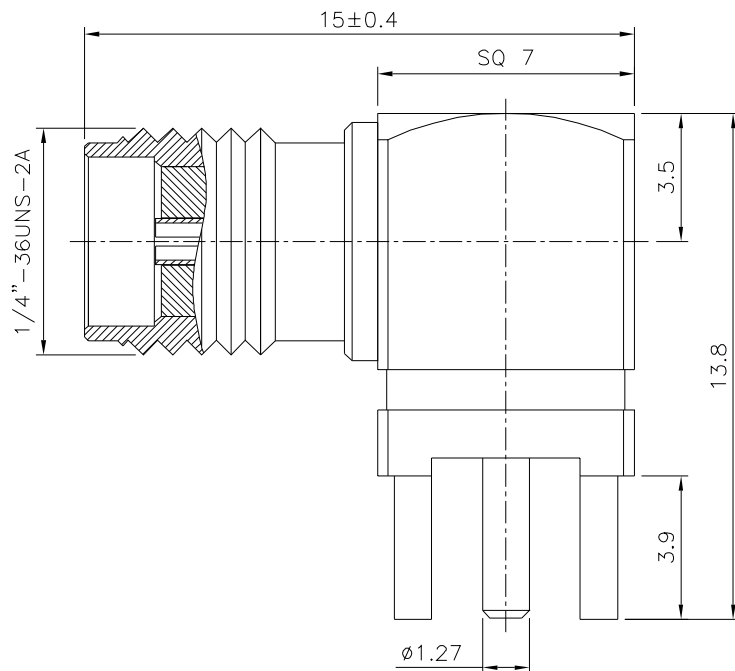

Recommended P.C.B. Layout

△ SPECIFICATION

Impedance:50 Ohms
 Frequency Range:DC~6GHz
 V.S.W.R:1.3 Max.
 Working Voltage:500V AC
 Withstand Voltage:1000V AC At 1 Minute
 Insulation Resistance:5000 Megaohms Min.
 Durability:100 Mating Min.
 Center Contact Resistance:5.0 Milliohms Max.
 Outer Contact Resistance:2.5 Milliohms Max.
 Temperature Range:-65°C~+165°C
 RoHS Compliant

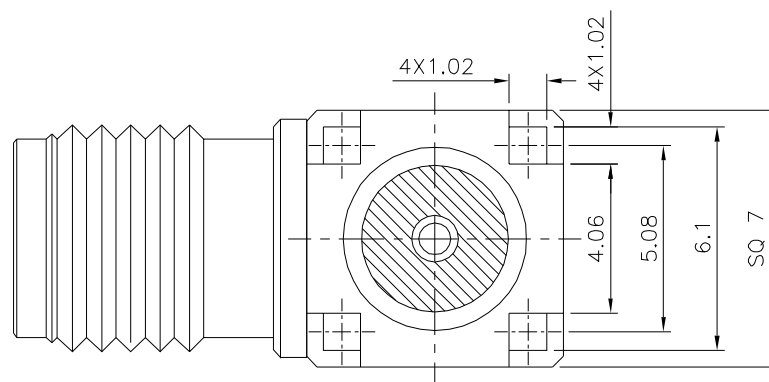

⑤ Insulator	1	Teflon	_____	
④ Body	1	Brass	Gold Plated Over Nickel	
③ Center Pin	1	Phosphor Bronze	Gold Plated Over Nickel	
② Insulator	1	Teflon	_____	
① Body	1	Brass	Gold Plated Over Nickel	
No.	Description	Q'ty	Material	Remark

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

07259

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee

REV.

B1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.1

.X ±0.1

.XX ±0.1

UNIT
 mm



B1

Modify Data

HZF

09/29/2026



B0

NEW RELEASE

HZF

10/18/2023

NO. REV.

REVISIONS

CHK

DATE