


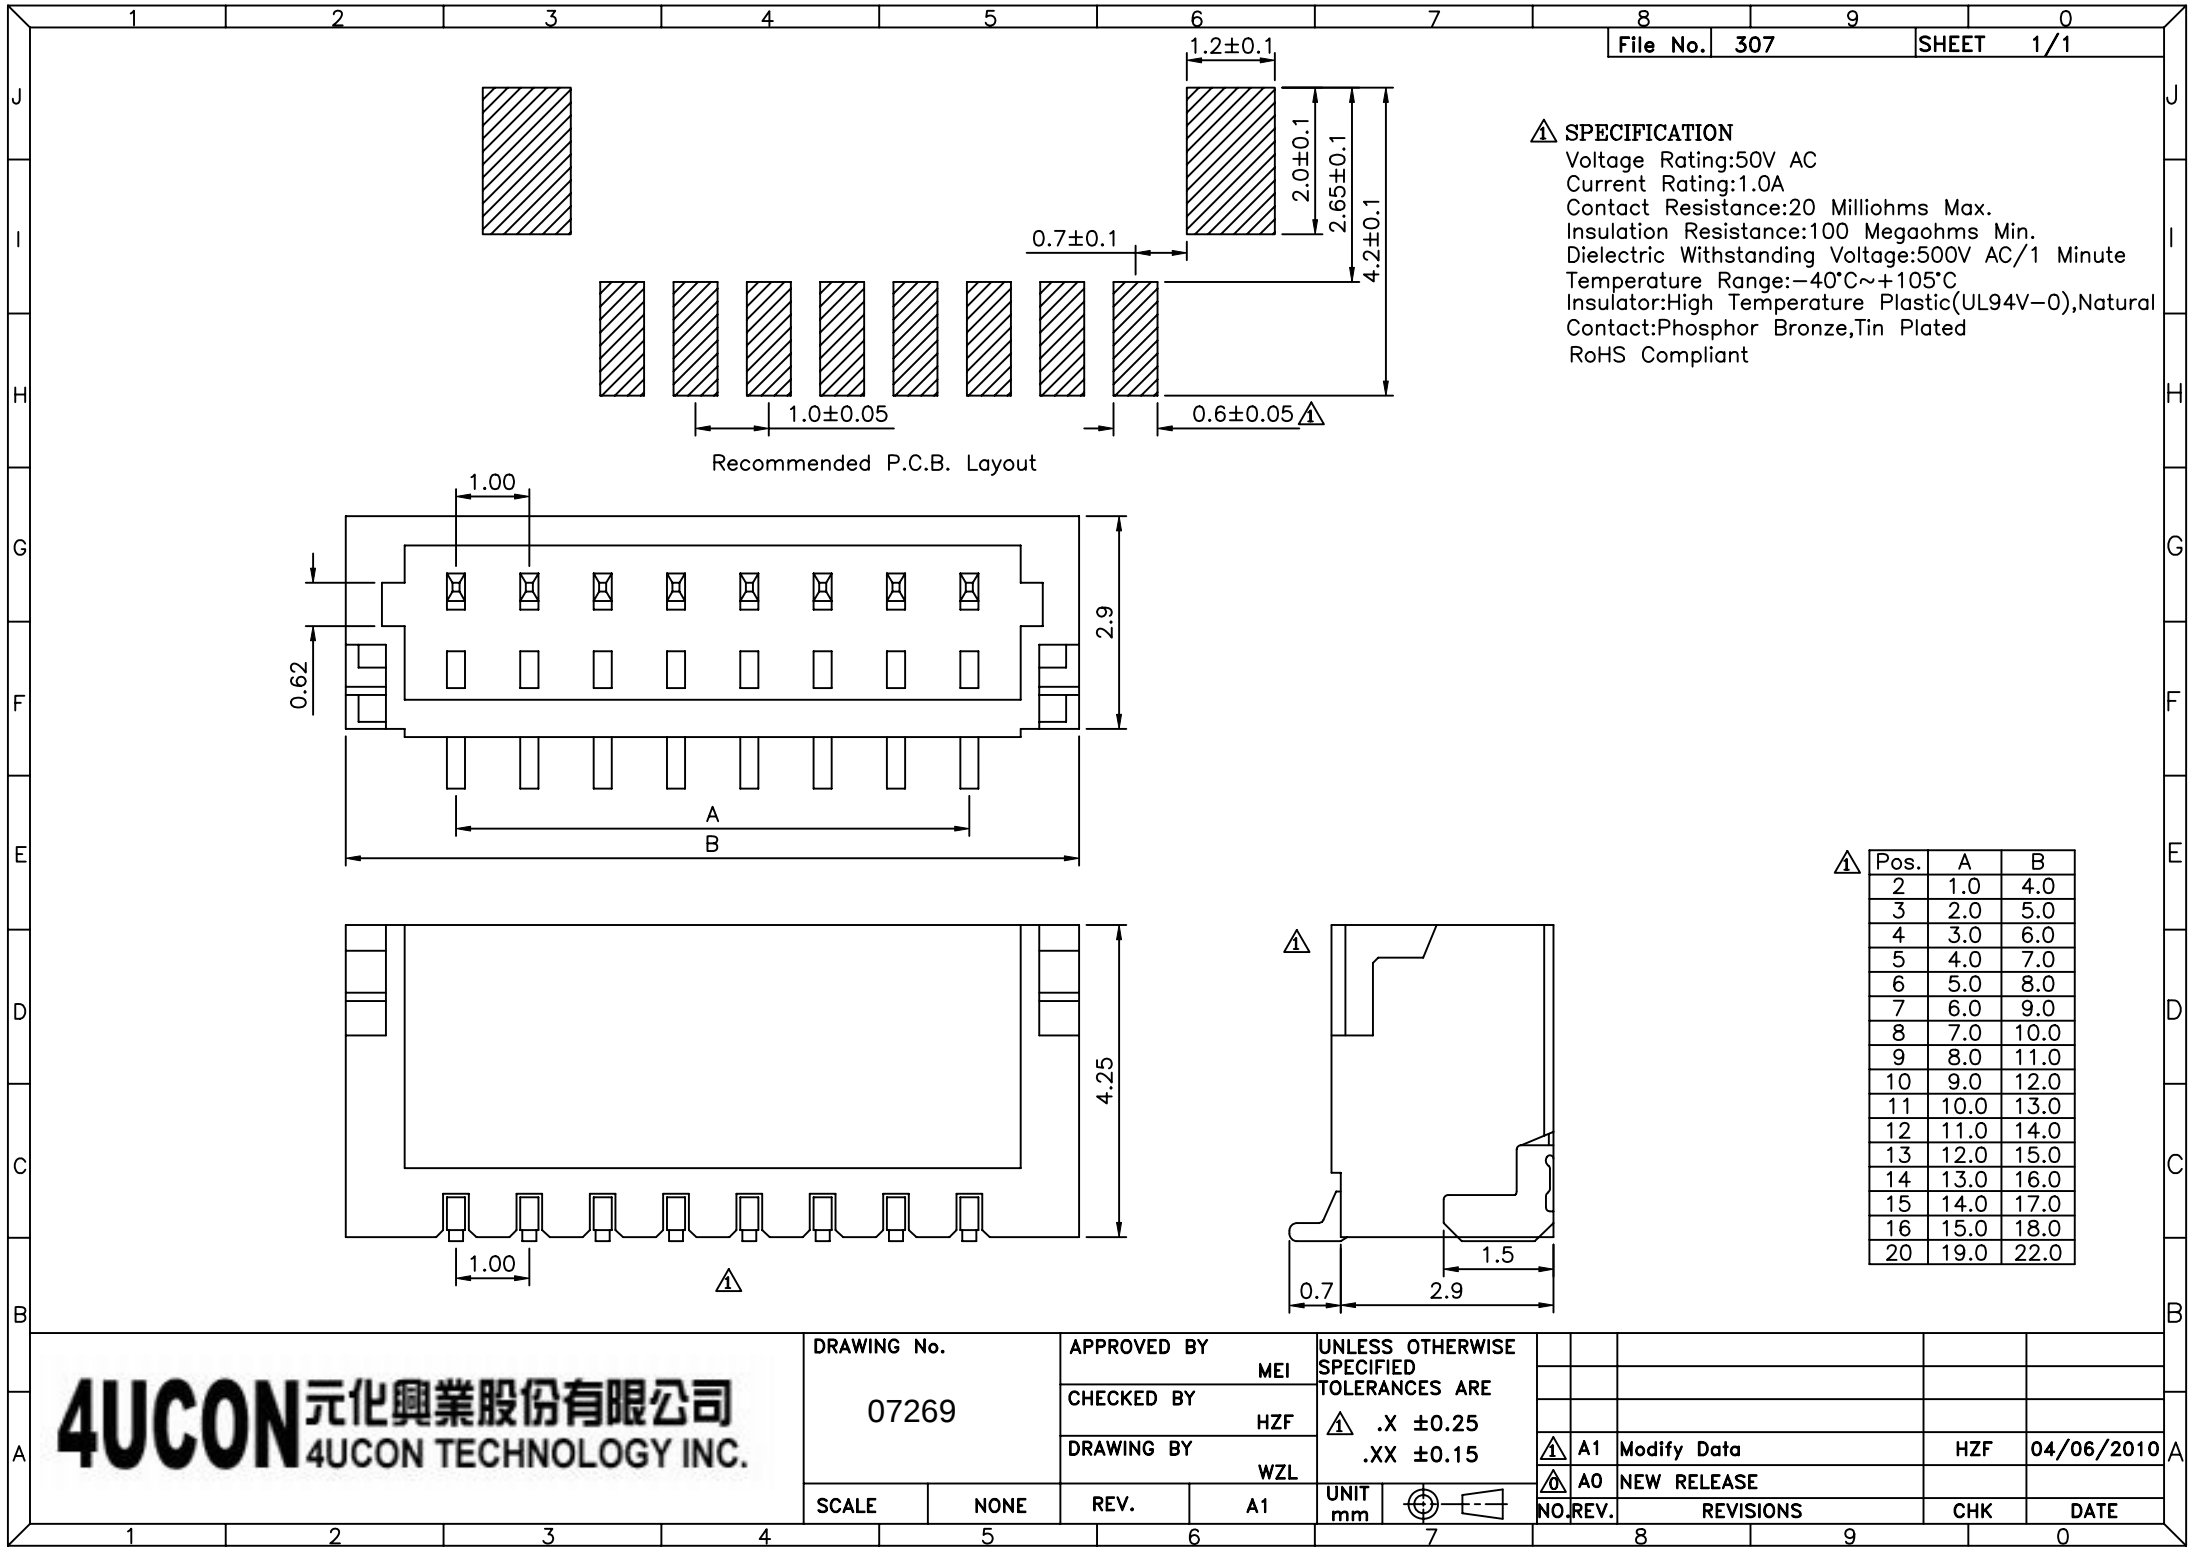

△ SPECIFICATION
Voltage Rating:50V AC
Current Rating:1.0A
Contact Resistance:20 Milliohms Max.
Insulation Resistance:100 Megaohms Min.
Dielectric Withstanding Voltage:500V AC/1 Minute
Temperature Range:-40°C~+105°C
Insulator:High Temperature Plastic(UL94V-0),Natural
Contact:Phosphor Bronze,Tin Plated
RoHS Compliant

△ Pos.	A	B
2	1.0	4.0
3	2.0	5.0
4	3.0	6.0
5	4.0	7.0
6	5.0	8.0
7	6.0	9.0
8	7.0	10.0
9	8.0	11.0
10	9.0	12.0
11	10.0	13.0
12	11.0	14.0
13	12.0	15.0
14	13.0	16.0
15	14.0	17.0
16	15.0	18.0
20	19.0	22.0

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

07269

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

WZL

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△ .X ± 0.25

.XX ± 0.15

SCALE


NONE

REV.

A1

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE

△ A1

Modify Data

HZF

04/06/2010

△ A0

NEW RELEASE