


MATERIALS AND FINISH

Shell: Steel Material, Front Shell Nickel Finished
Back Shell Tin Finished
Insulator: PBT Thermoplastic, 30% Glass Filled,
UL 94V-0 Rated, Black Color
Contact Material: Brass
Contact Finish: Full Gold Flash

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 5.0 Amps
Contact Resistance: 30 Milliohms Max.
Insulation Resistance: 5000 Megohms Min.
Dielectric Withstanding Voltage: 1000V AC Min.
Temperature Rating: -55°C ~ +105°C

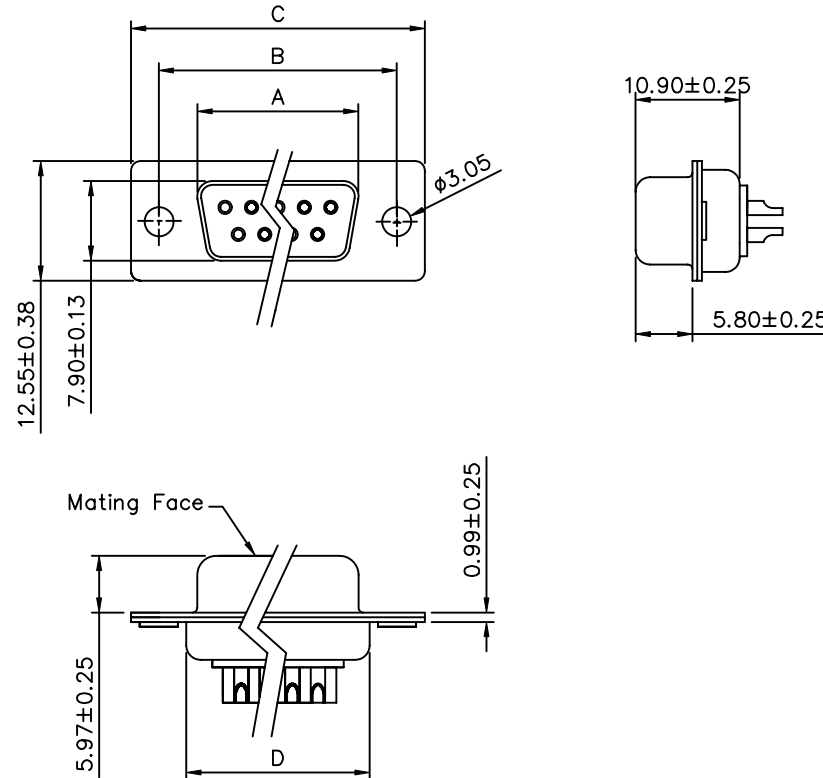

Contacts	A±0.25	B±0.13	C±0.38	D±0.25	E
09	16.33	24.99	30.81	19.28	11.08
15	24.66	33.32	39.14	27.51	19.39
25	38.38	47.04	53.04	41.28	33.24
37	54.84	63.50	69.32	57.71	49.86

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

07453

APPROVED BY

MEI

CHECKED BY

SHIN

DRAWING BY

INGRID

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


.X

.XX ±0.13

ANG. ±2°

UNIT

mm



NO. REV.

A0

NEW RELEASE

REVISIONS

SHIN

03/04/2007

CHK

DATE

SCALE

NONE

REV.

A0