

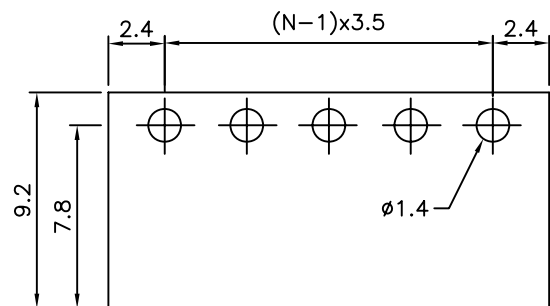
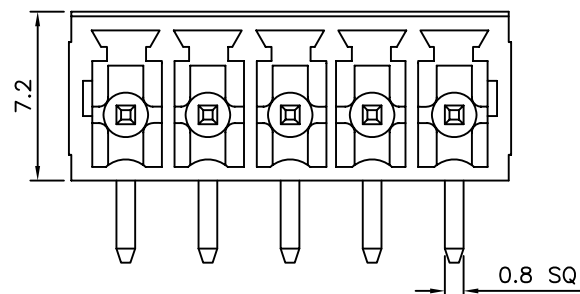


SPECIFICATIONS

Voltage Rating: 250VAC
 Current Rating: 8A
 Insulation Resistance: 500 Megohms At DC 500V
 Withstanding Voltage: AC 1200V (1Min)
 Using Temperature Range: -40°C To +105°C
 Soldering Temperature: +250°C 5Seconds Max
 Solder Pin: Brass With Tin Plated
 Insulator Body(Housing): Polyamide (Glass Filled)(UL94V-0)



P.C.B. Layout

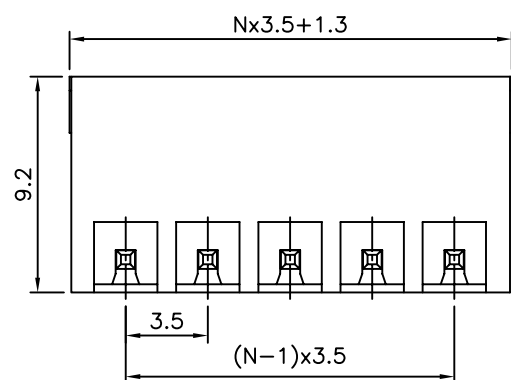

N=Number Of Contacts

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

07544

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

PEGA

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 ANG ±1°


SCALE

NONE

REV.

A0

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ A0

NEW RELEASE

HZF

05/15/2006