



SPECIFICATION



Voltage Rating:300V
 Current Rating:8A
 Wire Range:AWG #28~#16
 Withstanding Voltage:1600V/Minute
 Operating Temperature: -40°C~+105°C
 Insulator:PA66,(UL94V-0),Green
 Contact:Copper Alloy,Nickel Plated
 RoHS Compliant
 * 02~24P Available~

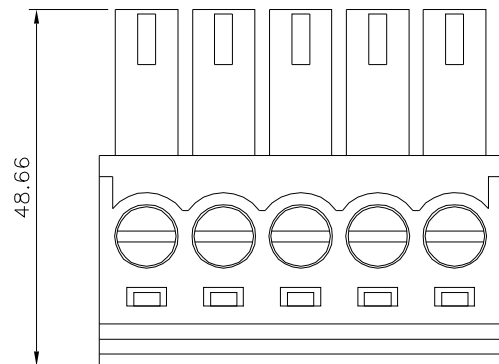

6~24 Pin

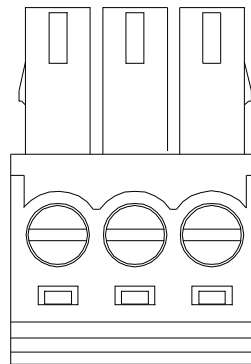

2~5 Pin

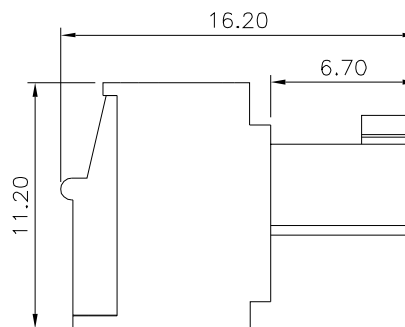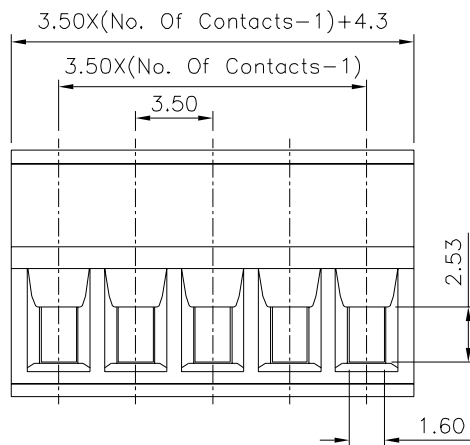

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

07545

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 0<L≤6 ±0.20
 6<L≤10 ±0.30
 10<L≤30 ±0.50
 30<L≤60 ±0.70
 60<L≤100 ±1.00
 100<L≤160 ±1.30

UNIT
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

11/21/2020

DATE