


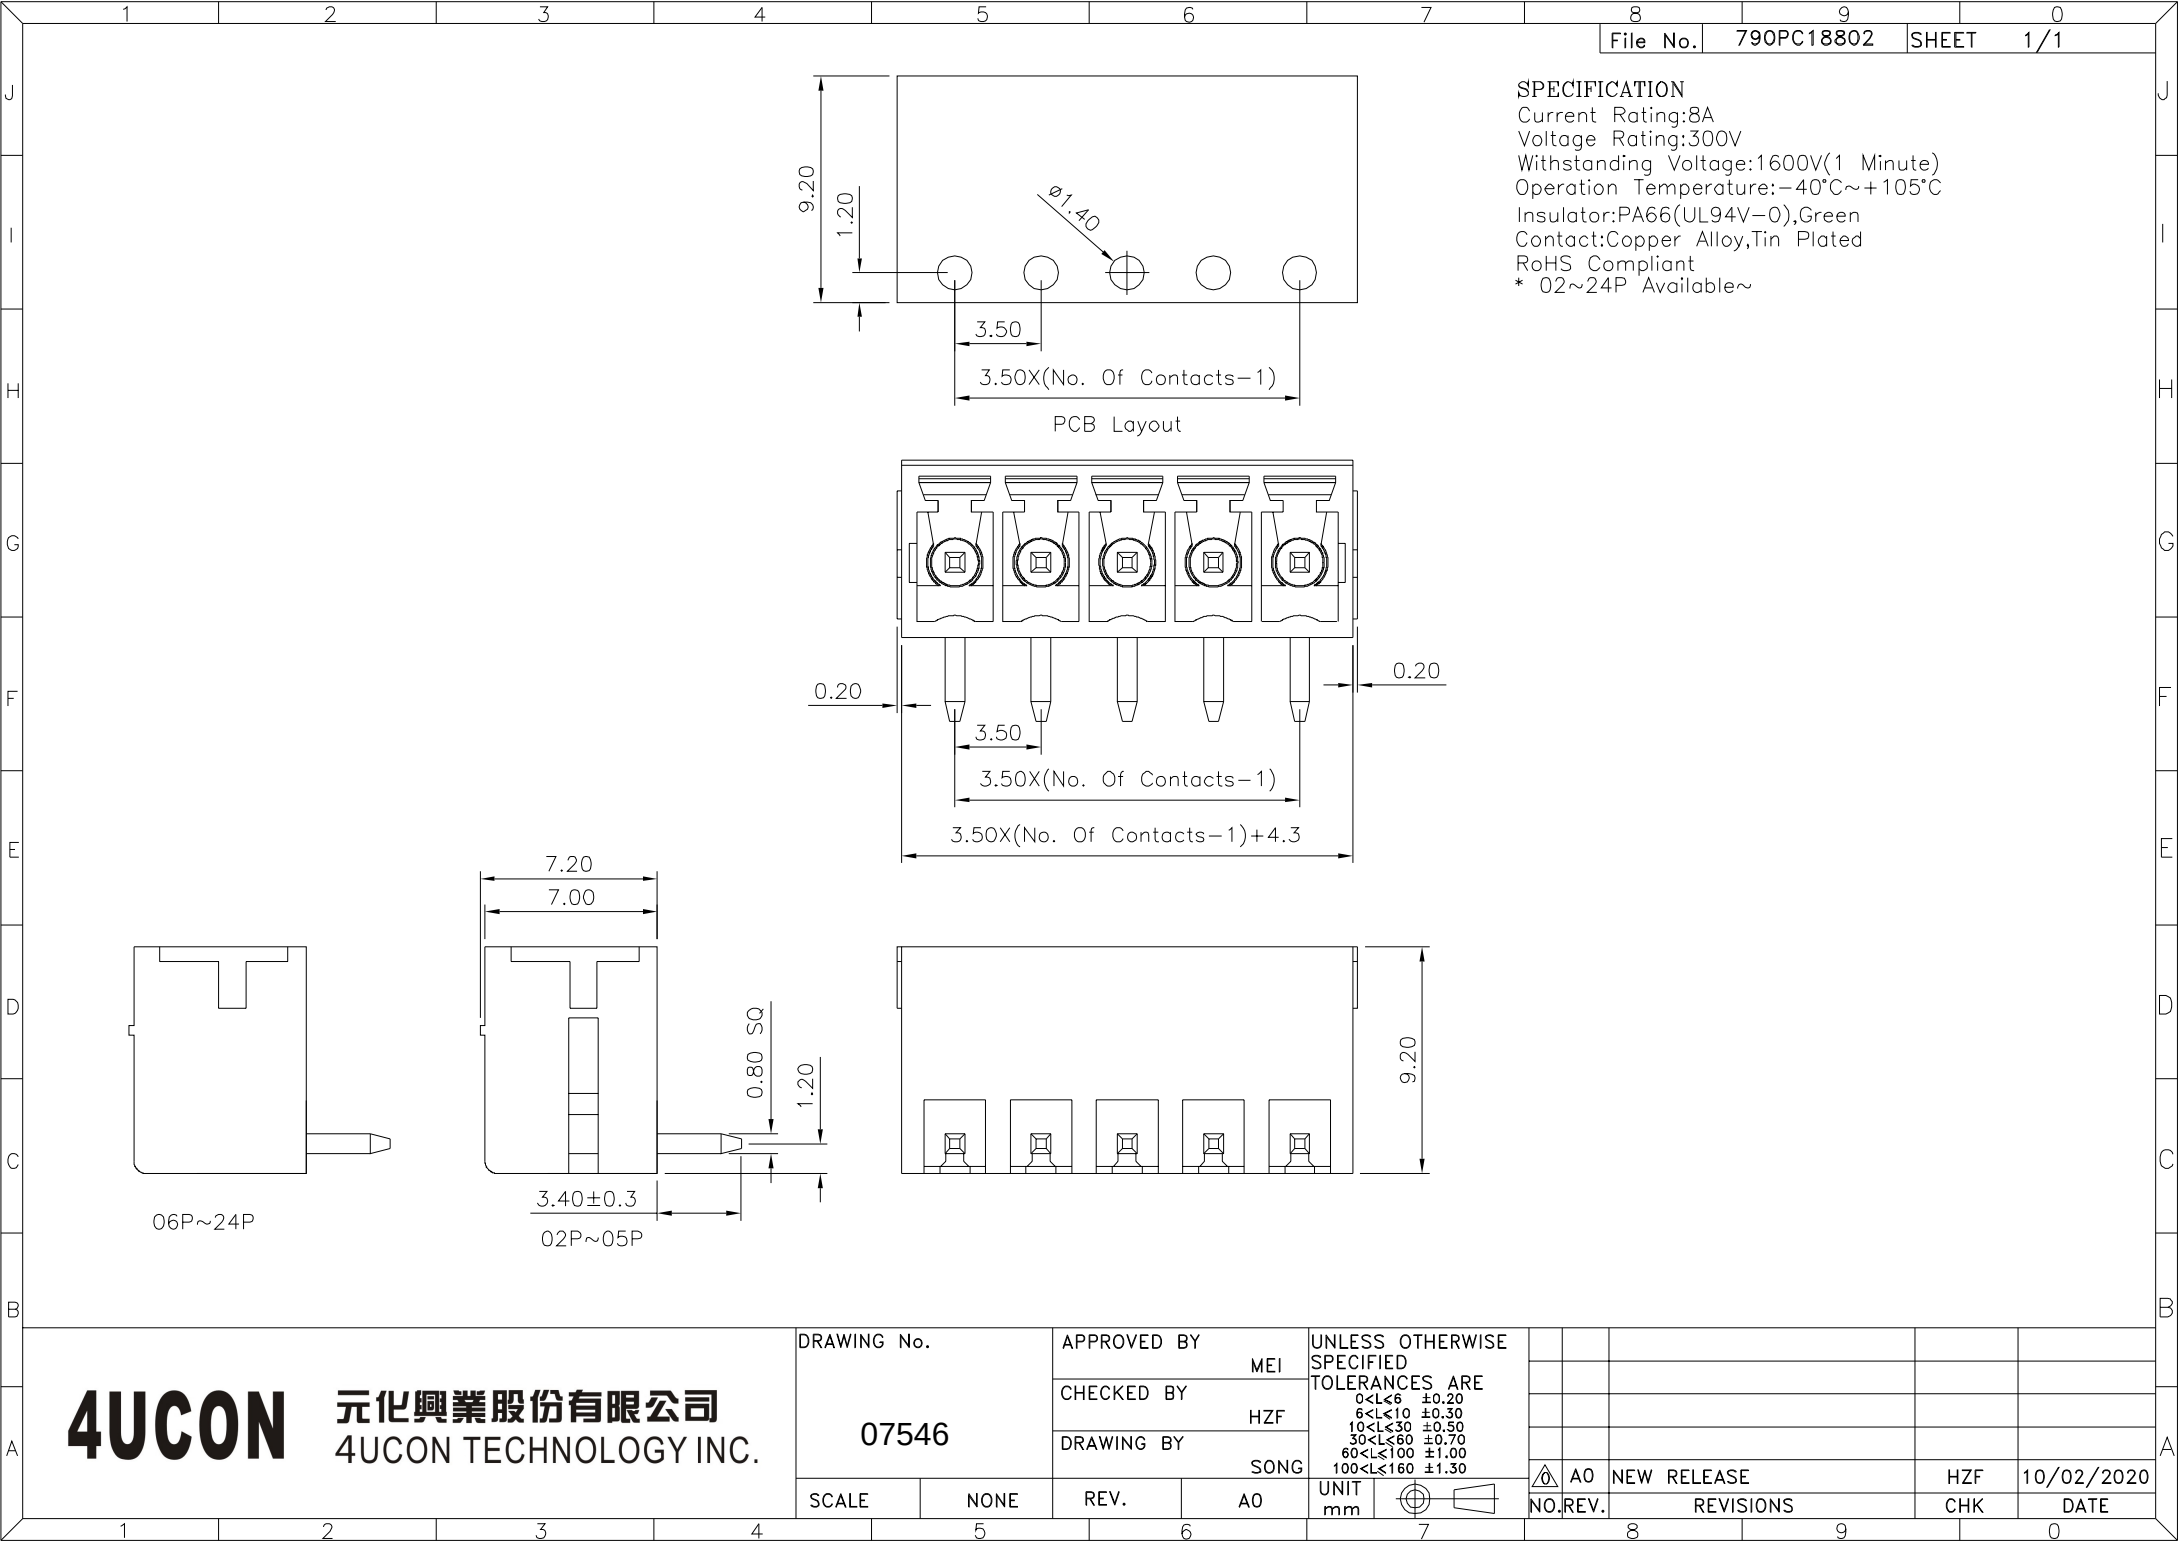


SPECIFICATION
Current Rating:8A
Voltage Rating:300V
Withstanding Voltage:1600V(1 Minute)
Operation Temperature:-40°C~+105°C
Insulator:PA66(UL94V-0),Green
Contact:Copper Alloy,Tin Plated
RoHS Compliant
* 02~24P Available~

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	
07546		HZF	
		DRAWING BY	
		SONG	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
0<L≤6	±0.20
6<L≤10	±0.30
10<L≤30	±0.50
30<L≤60	±0.70
60<L≤100	±1.00
100<L≤160	±1.30
UNIT	
mm	



NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	10/02/2020