



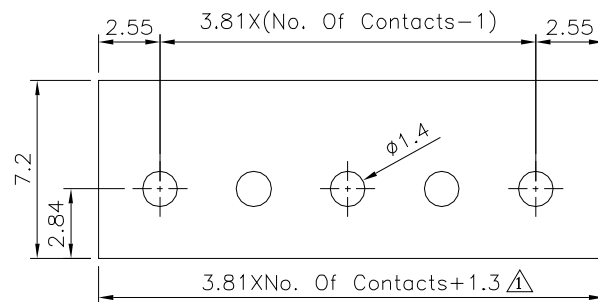


Recommended P.C.B. Layout

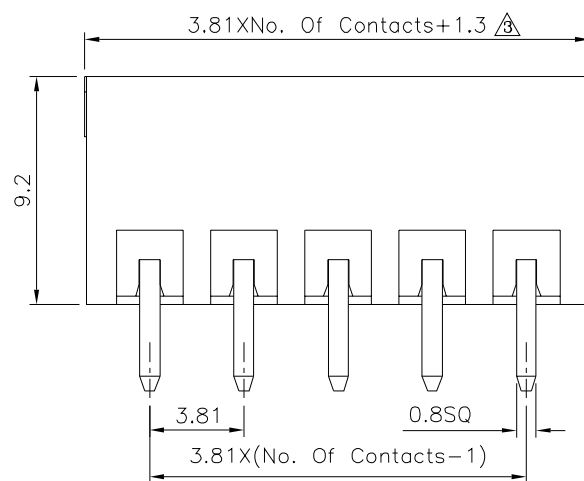


2P To 6P Open Type  
Above 7P (Including 7P)  
Close Type

| Length(L) | Tolerances |
|-----------|------------|
| 0~30      | ±0.30      |
| 30~60     | ±0.40      |
| 60~120    | ±0.50      |
| 120~220   | ±0.60      |

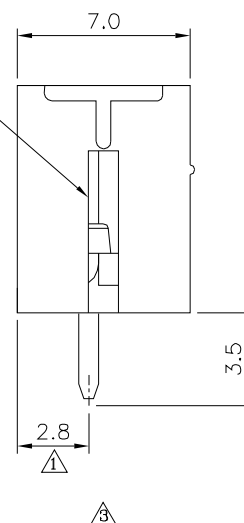

### SPECIFICATION

Current Rating:12A/Way Max.  
Voltage Rating:300V AC  
Withstanding Voltage:1600V AC/Minute  
Operation Temperature:-40°C~+105°C  
Solder Pin:Copper Alloy,Tin Plated  
Insulator Body:Polyamide(UL94V-0),Green  
RoHS Compliant

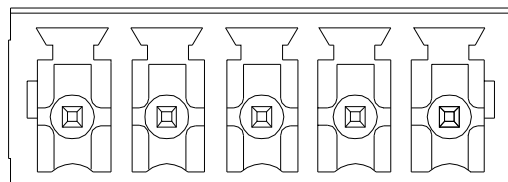

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. 07565

APPROVED BY Jason Wu

CHECKED BY Leo Han

DRAWING BY Michelle Lee

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:  
X. ±0.50  
.X ±0.40  
.XX ±0.30  
ANG. ±1°

SCALE

NONE

REV.

A3

UNIT mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| 3   | A3   | Modify Mata | HZF | 06/15/2026 |
| 2   | A2   | Modify Mata | HZF | 01/30/2016 |
| 1   | A1   | Modify Mata | HZF | 08/14/2012 |
| 0   | A0   | NEW RELEASE | HZF | 04/10/2009 |