

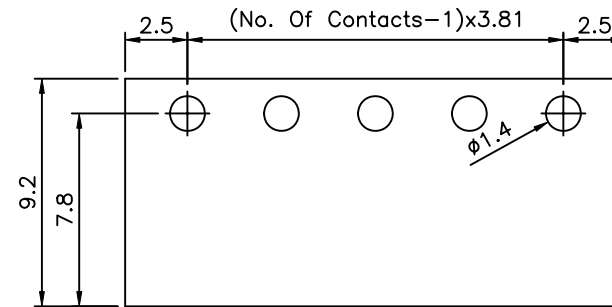
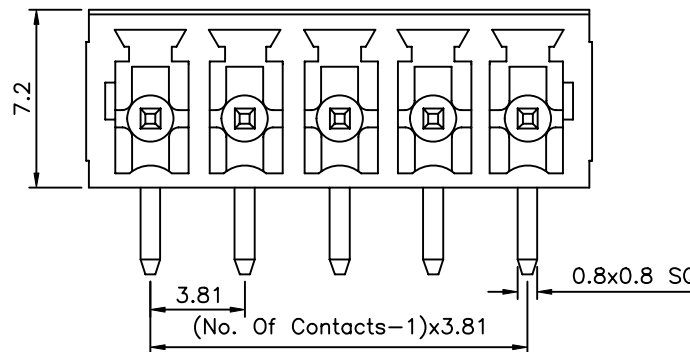


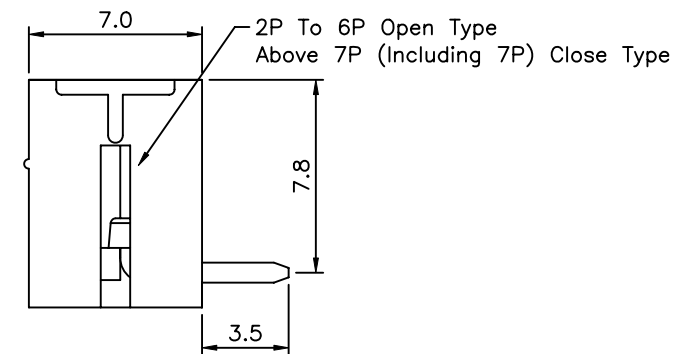

P.C.B Layout

SPECIFICATION

Current Rating:8A
 Voltage Rating:250V AC
 Withstanding Voltage:AC 1200V(1Minute)
 Insulation Resistance:500 Megaohms At DC 500V
 Using Temperature Range:-40°C~+105°C
 Soldering Temperature:+250°C,5Seconds Max.
 Insulator Body(Housing):Polyamide
 (Glass Filled)UL94V-0,Green
 Solder Pin:Brass,Tin Plated
 RoHS Compliant

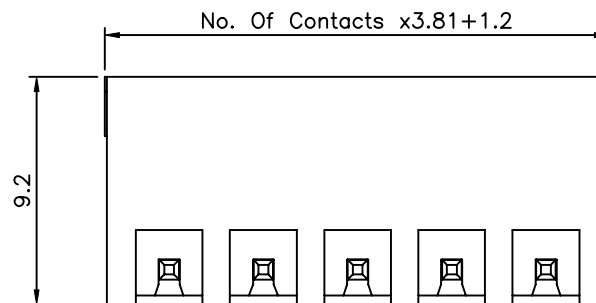

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

07570

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HYY

REV.

A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X. ± 0.50

.X ± 0.30

.XX ± 0.20

ANG. $\pm 1^\circ$

UNIT mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

04/10/2009

DATE