

△△ SPECIFICATION

1.Material&Finish

Insulator:PA66+15%G.F.(UL94V-0),Black
Contact:Brass,Tin Plated

2.Electrical Characteristics

Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Withstanding Voltage:1500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.



3.Environmental Characteristics

Temperature Range:-25°C~+85°C















4.RoHS Compliant

△ Recommended P.C.B. Layout

△ Tolerance:±0.05

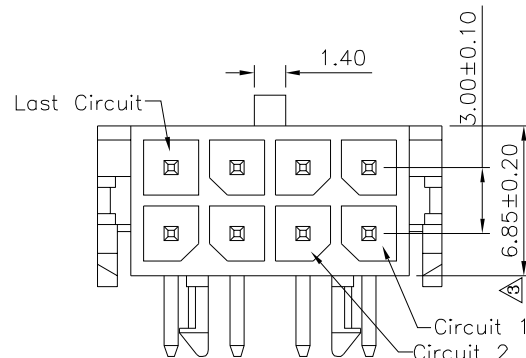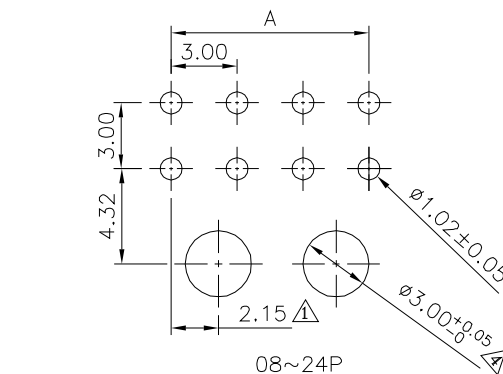

(02~12P) B±0.25
(14~24P) B±0.35

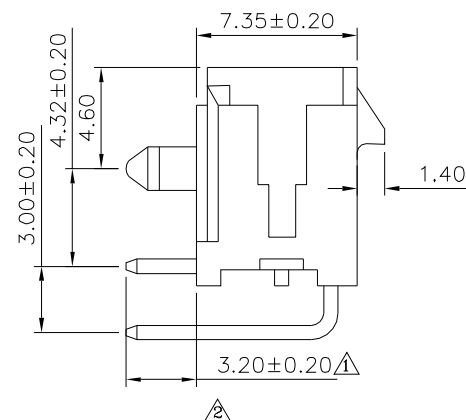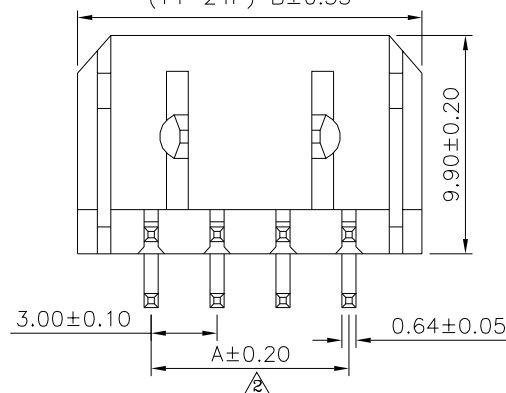

Pin	A	B
02	—	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

07780

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
XX ±0.20
.XXX ±0.05
ANG. ±1°

UNIT

mm



△ A4

Modify Data

HZF

04/15/2022

△ A3

Modify Dim.

HZF

04/13/2018

△ A2

Modify Data

HZF

09/28/2017

△ A1

Modify Data

HZF

08/28/2013

△ A0

NEW RELEASE

HZF

11/16/2011

NO. REV.

REVISIONS

CHK

DATE