




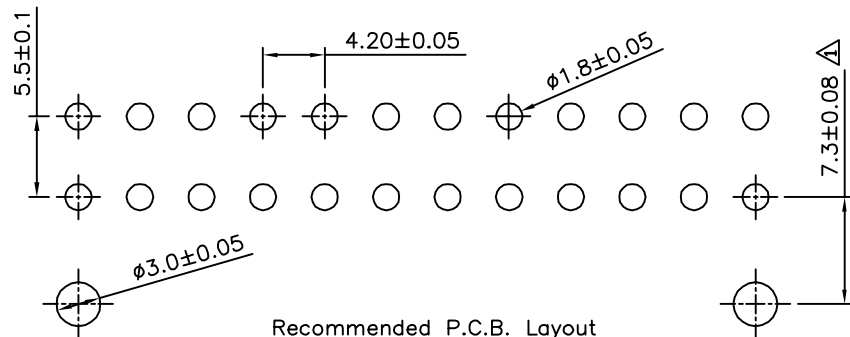


Recommended P.C.B. Layout

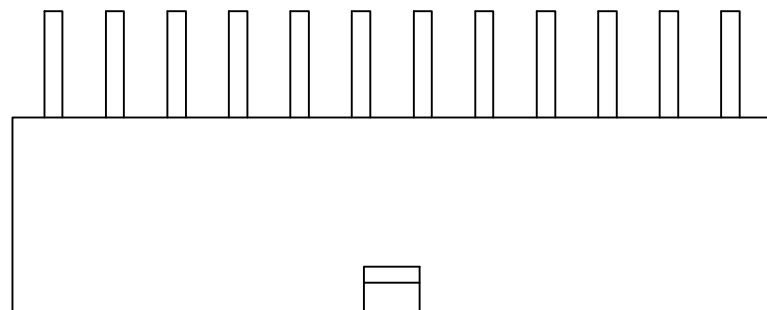



2X3Pin~2X12Pin

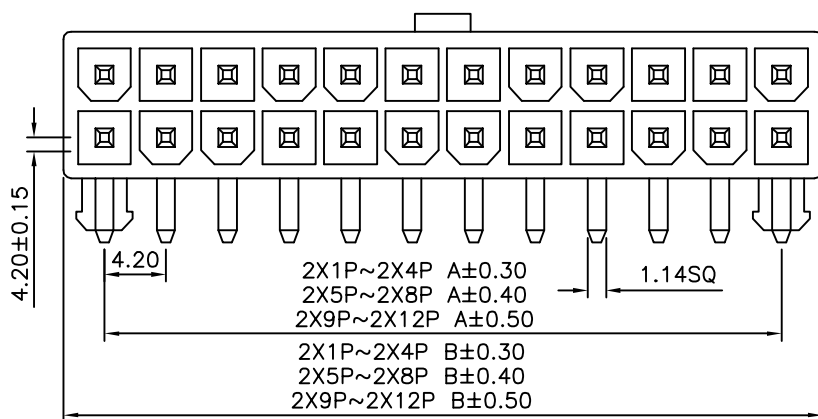


2X1Pin



2X2Pin




Recommended P.C.B. Layout



### △ SPECIFICATION

Current Rating:8A AC/DC  
Voltage Rating:500V AC/DC  
Withstand Voltage:1500V AC/Minute  
Insulation Resistance:1000 Megaohms Min.  
Temperature Range:-25°C~+85°C  
Insulator:PA66(UL94V-2),Nature  
Contact:Brass,Tin Plated  
Applicable PC Board Thickness:1.6mm  
RoHS Compliant

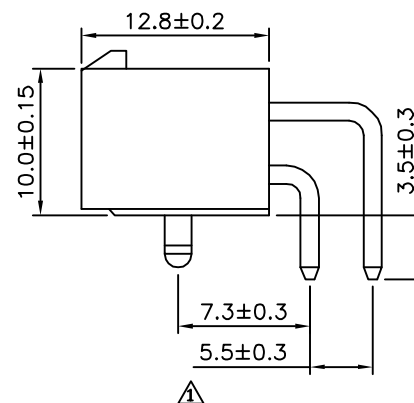

| Pin | A     | B    |
|-----|-------|------|
| 02  |       | 5.4  |
| 04  | 4.20  | 9.6  |
| 06  | 8.40  | 13.8 |
| 08  | 12.60 | 18.0 |
| 10  | 16.80 | 22.2 |
| 12  | 21.00 | 26.4 |
| 14  | 25.20 | 30.6 |
| 16  | 29.40 | 34.8 |
| 18  | 33.60 | 39.0 |
| 20  | 37.80 | 43.2 |
| 22  | 42.00 | 47.4 |
| 24  | 46.20 | 51.6 |

4U CON

元化興業股份有限公司  
4U CON TECHNOLOGY INC.

DRAWING No.

07816

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


HAO

REV.

A1

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
X. ±0.5  
X ±0.25  
.XX ±0.2  
.XXX ±0.08

UNIT  
mm



△ A1

Modify Data

HZF

11/25/2014

△ A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE