

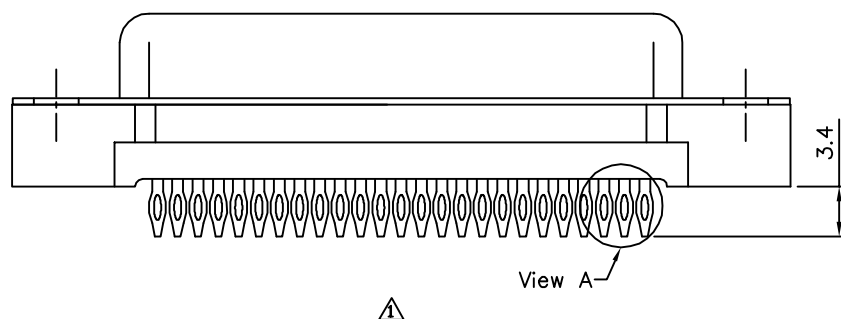

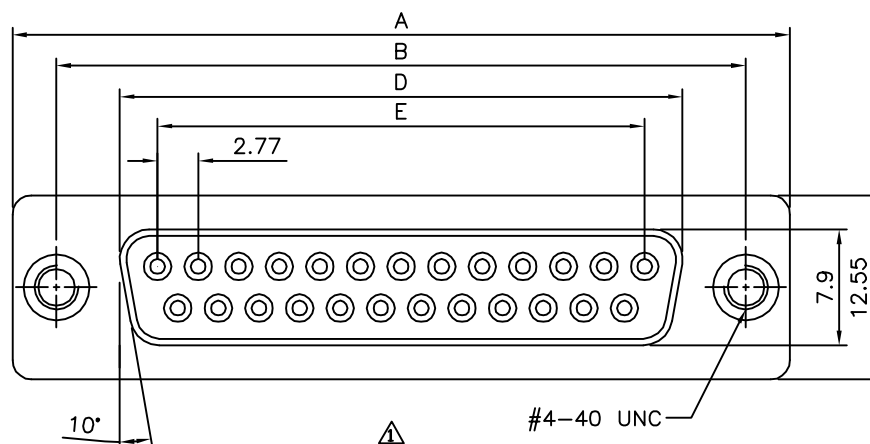


△ SPECIFICATION

Current Rating:3 Amp
 Voltage Rating:250V AC/RMS 60Hz
 Dielectric Withstanding Voltage:
 1000V AC/RMS 60Hz For 1 Minute
 Contact Resistance:20 Milliohms Max. At 1 Amp DC
 Insulation Resistance:1000 Megaohms At 500V DC
 Insulator:PBT,Black
 Contact:Phosphor Bronze,Selective Gold Flash
 Shell:Steel,Tin Plated Over Copper
 Clinch Nut:Brass,Nickel Plated
 RoHS Compliant

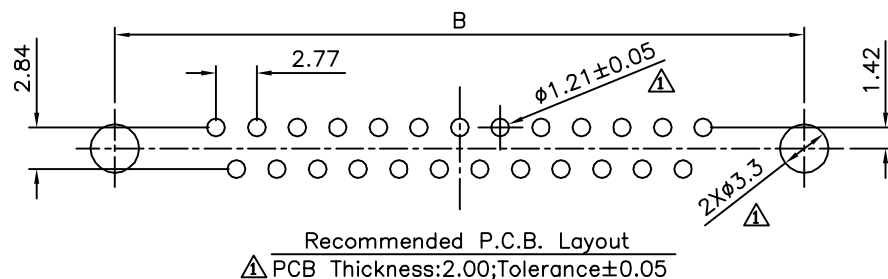

△

Positions	A	B	D	E
9	30.81	24.99	16.33	11.08
15	39.20	33.30	24.70	19.39
25	53.05	47.04	38.40	33.24
37	69.40	63.50	54.80	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

07941

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


QQJ

REV. A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.38 X.* ±3°
 .X ±0.25 .X* ±1.0°
 .XX ±0.13

UNIT mm



△ A1

Modify Data

HZF

09/13/2010

△ A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE