File No.	352NK13217	SHEET	1/1

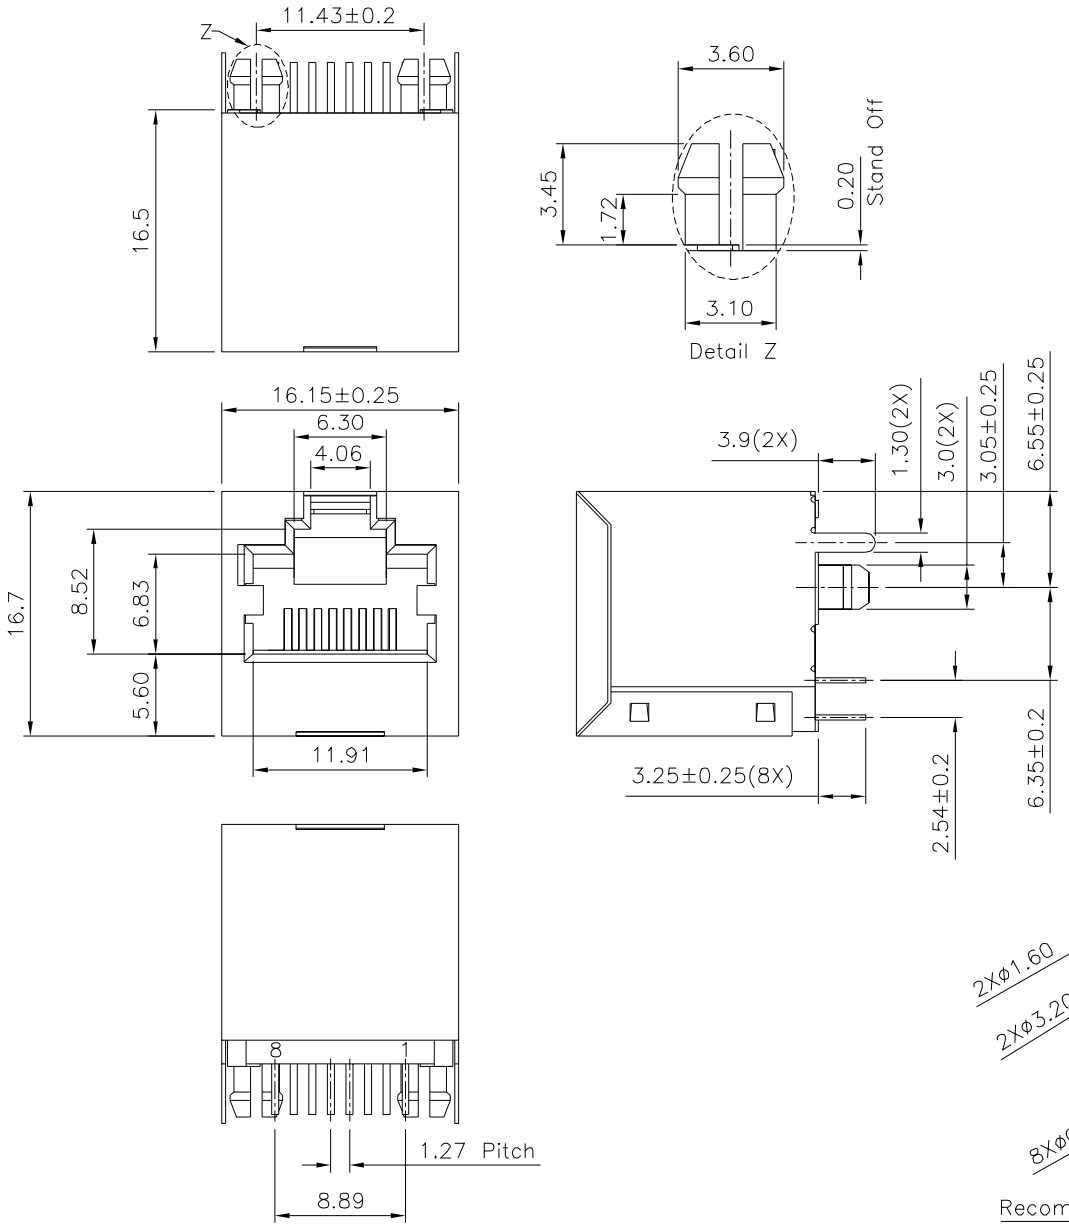

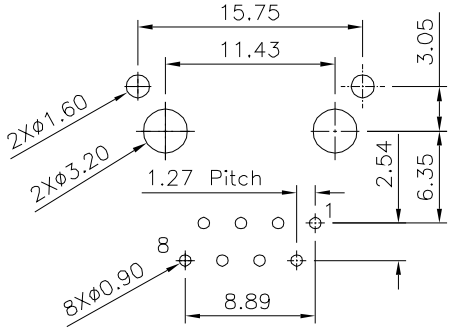

Recommended P.C.B. Layout(Top View)
P.C.B Thickness:1.6mm (Tolerance±0.05)

SPECIFICATION

Current Rating:1.5A Max.
Voltage Rating:150V AC Max.
Operating Temperature:−40°C~+85°C
Insulation Resistance:500 Megaohms Min. Initial At 500V DC
Contact Resistance:20 Milliohms Max. Initial
Dielectric Withstanding Voltage:
1000V RMS. At 60Hz,1 Minute Between Adjacent Contacts
1500V RMS. At 60Hz,1 Minute Between Shield And Contacts
Housing:PBT+G.F.(UL94V−0),Black
Insert Housing:PBT+G.F.(UL94V−0),Black
Contacts:Phosphor Bronze
Gold Plated 06u" On Contact Area, Gold Flash On Other Area,Over Nickel
Shield:Brass,Nickel Plated
Cavity Conforms To FCC Rules And Regulations Part 68,Subpart F.
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
08010	CHECKED BY	HZF	.X ±0.25
	DRAWING BY	CYP	.XX ±0.13
			.XXX ±0.05
SCALE NONE	REV.	C0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	C0	NEW RELEASE	HZF	10/28/2023