

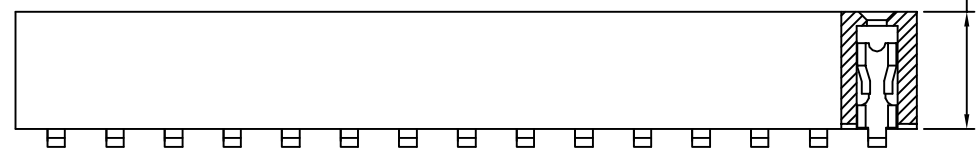


Recommended P.C.B. Layout

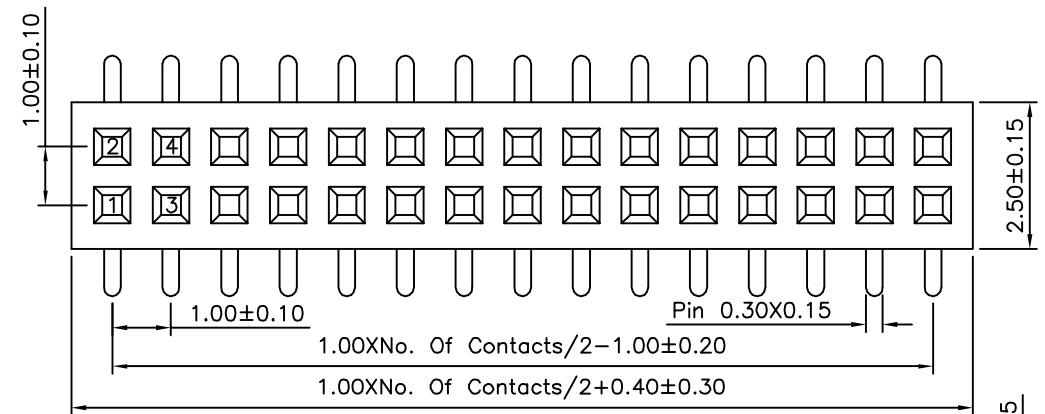

SPECIFICATION

Current Rating:0.75 Amp
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Dielectric Withstand:500V AC/Minute
 Operating Temperature:-40°C~+105°C
 Housing:PA6T+30%G.F.(UL94V-0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20
08043		EMILY		
		CHECKED BY HZF		
SCALE		DRAWING BY		UNIT mm
NONE		HAO		
REV.	AO	NO. REV.		AO
		REVISIONS		NEW RELEASE
		CHK		HZF
		DATE		03/15/2015

NO. REV.	AO	NEW RELEASE	HZF	03/15/2015
		REVISIONS	CHK	DATE