

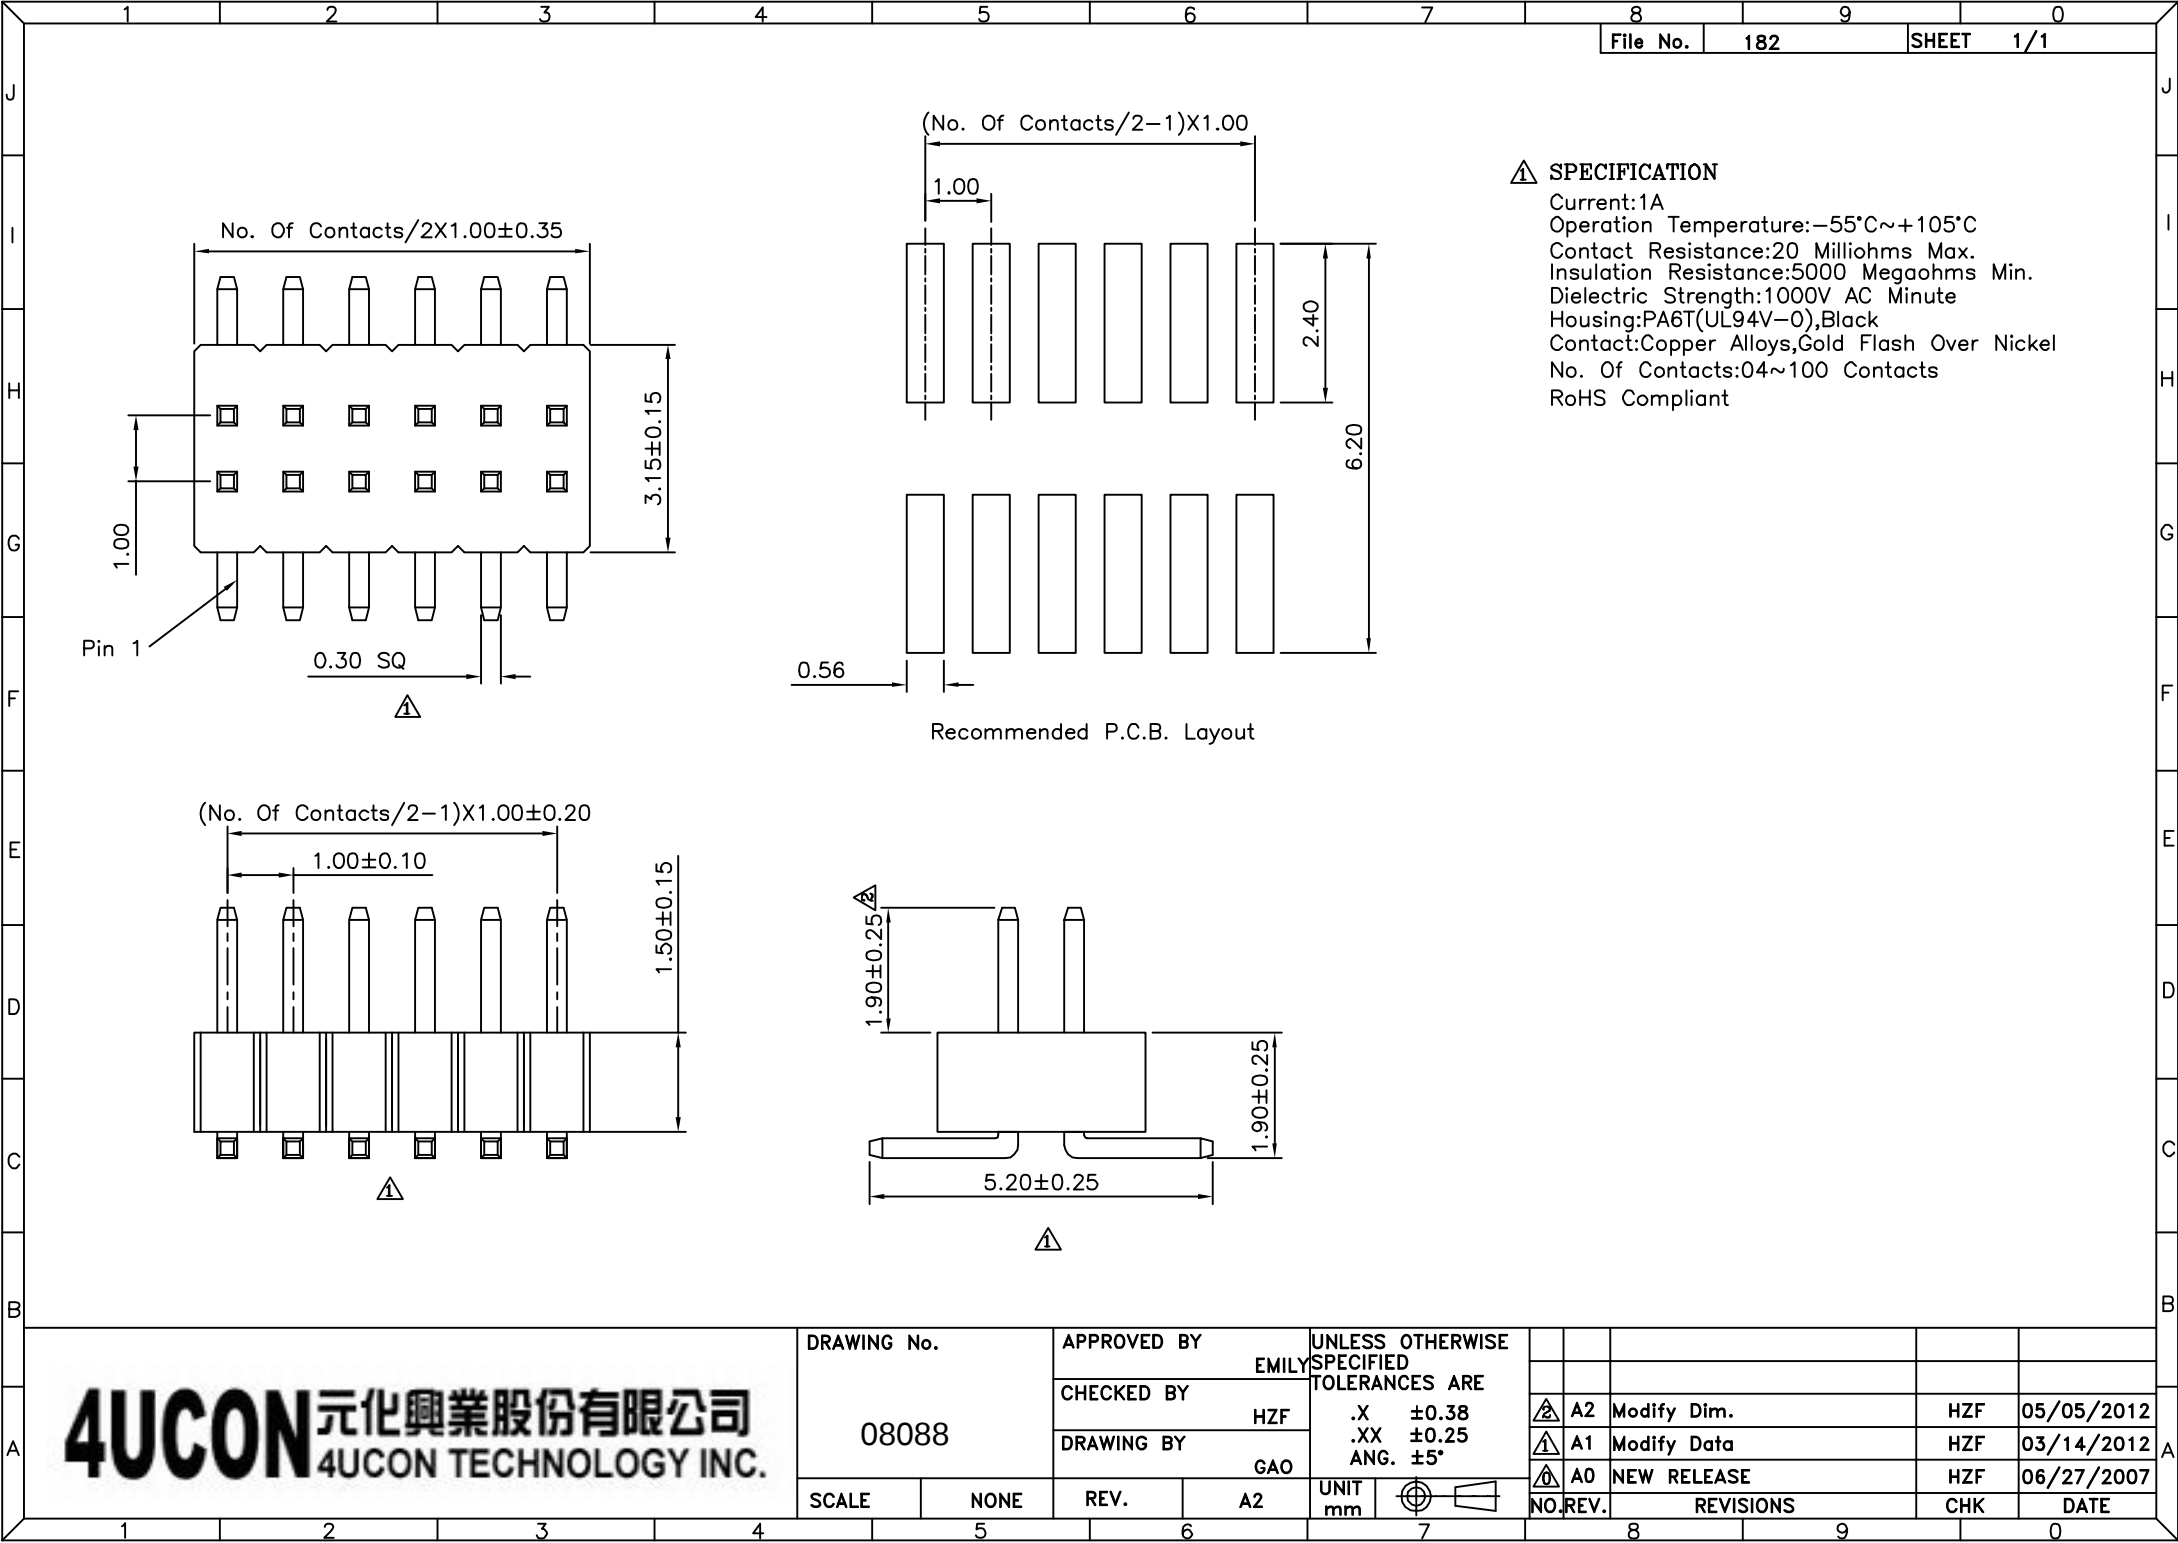
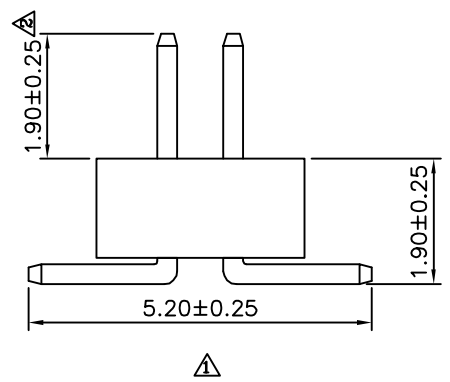
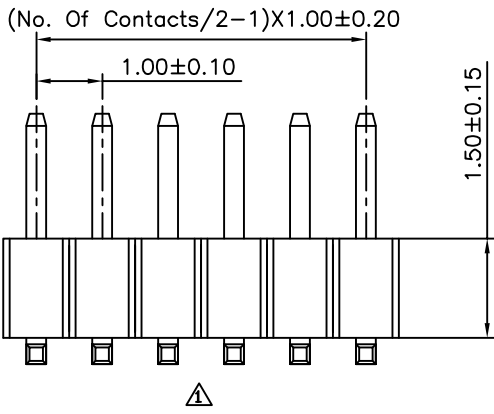


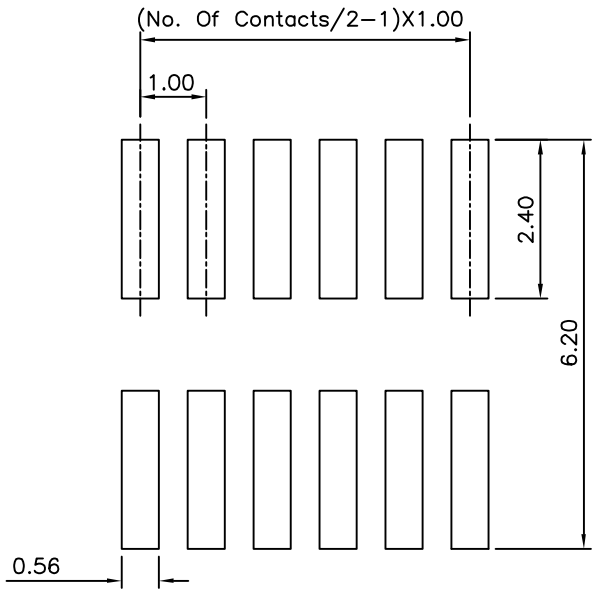

△ SPECIFICATION
Current:1A
Operation Temperature:-55°C~+105°C
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Dielectric Strength:1000V AC Minute
Housing:PA6T(UL94V-0),Black
Contact:Copper Alloys,Gold Flash Over Nickel
No. Of Contacts:04~100 Contacts
RoHS Compliant

Recommended P.C.B. Layout

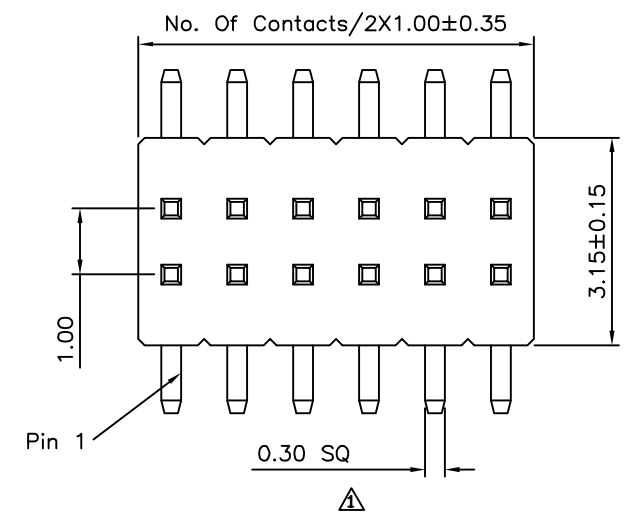

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 08088		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°	
		CHECKED BY HZF			
		DRAWING BY GAO			
SCALE	NONE	REV.	A2	UNIT mm	

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Dim.	HZF	05/05/2012
△A1		Modify Data	HZF	03/14/2012
△A0		NEW RELEASE	HZF	06/27/2007