

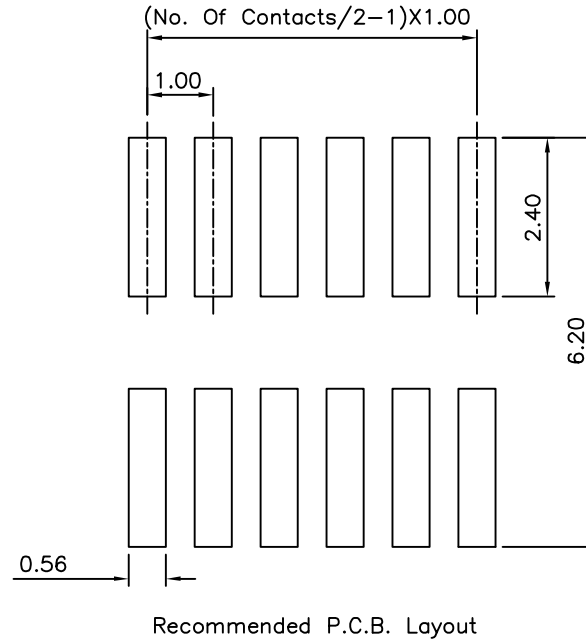
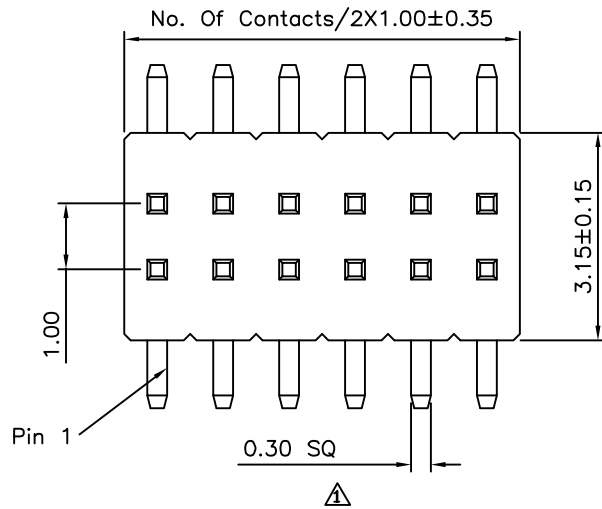


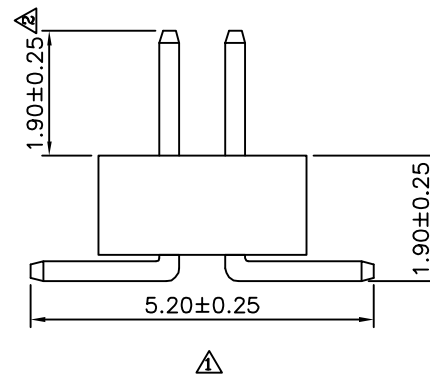

△ SPECIFICATION

Current:1A
 Operation Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Dielectric Strength:1000V AC Minute
 Housing:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash Over Nickel
 No. Of Contacts:04~100 Contacts
 RoHS Compliant

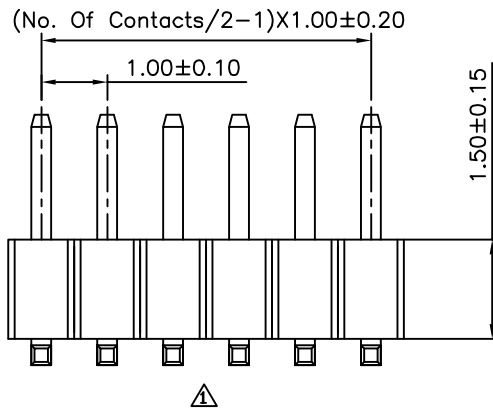

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

08094

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ± 0.38

.XX ± 0.25

ANG. $\pm 5^{\circ}$

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2	Modify Dim.	HZF	05/05/2012	
△ A1	Modify Data	HZF	03/14/2012	
△ A0	NEW RELEASE	HZF	06/27/2007	