




3 Recommended P.C.B. Layout

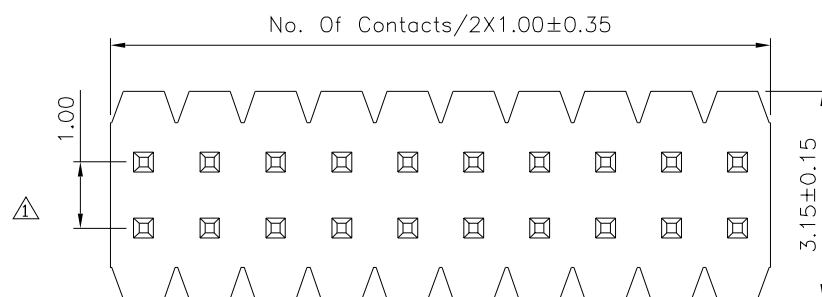

4

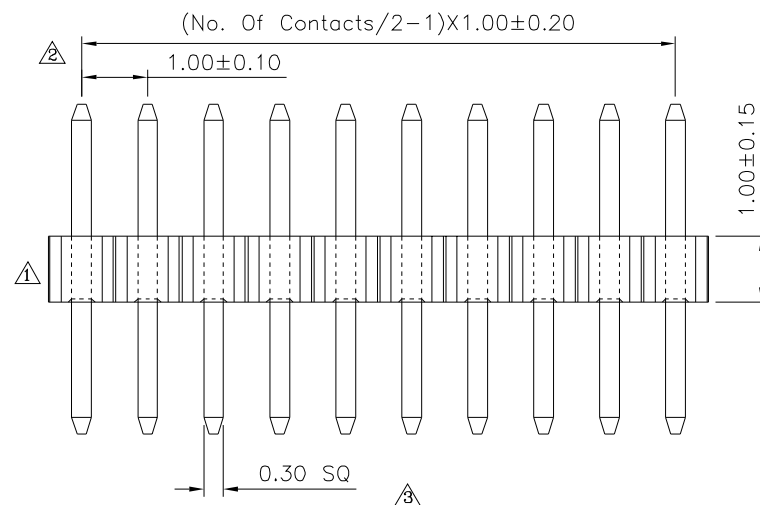

3

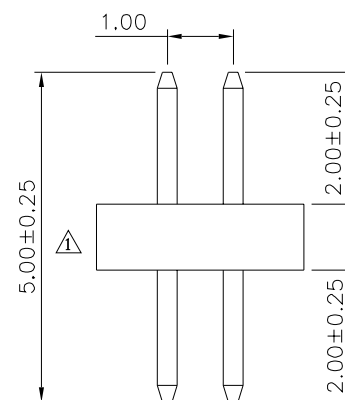

3/2

### 3 SPECIFICATION

Current:1A  
Withstanding Voltage:500V AC/Minute  
Insulation Resistance:5000 Megaohms Min.  
Contact Resistance:20 Milliohms Max.  
Operation Temperature:-40°C~+105°C  
Insulator:PA6T(UL94V-0),Black  
Contact:Brass,Gold Flash Over Nickel  
No. Of Contacts:04~100 Contacts  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. 2/3

08121

APPROVED BY MEI  
CHECKED BY HZF  
DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
.X ±0.38  
.XX ±0.25  
ANG ±5°

SCALE NONE

REV. A3

UNIT mm

| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| 3   | A3   | Modify Data | HZF | 08/02/2019 |
| 2   | A2   | Modify Data | HZF | 05/21/2011 |
| 1   | A1   | Modify Data | HZF | 10/15/2009 |
| 0   | A0   | NEW RELEASE | HZF |            |