




△ Recommended P.C.B. Layout

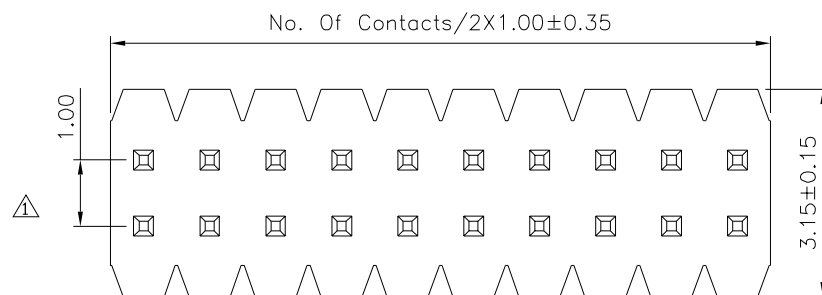

△

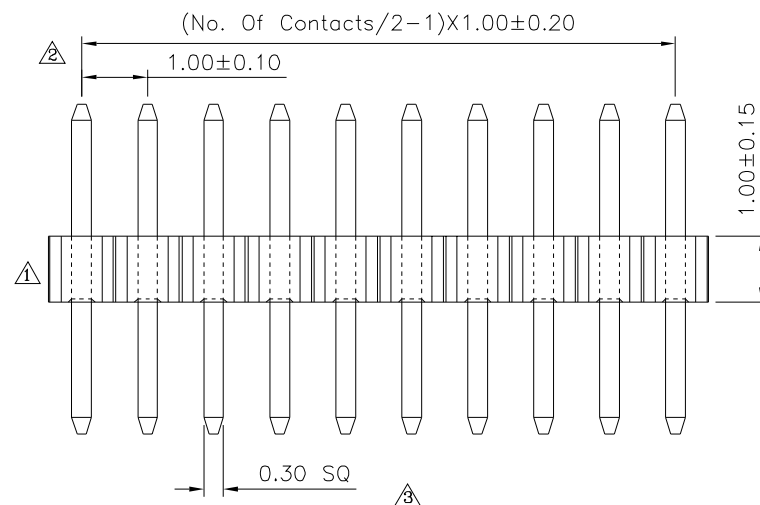

△

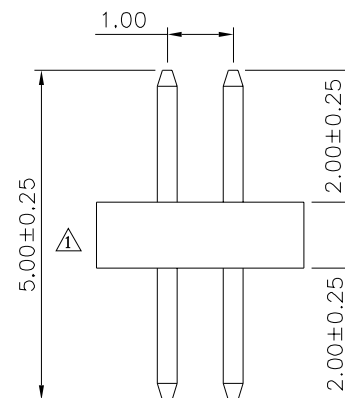

△/△

△ SPECIFICATION

Current:1A
 Withstanding Voltage:500V AC/Minute
 Insulation Resistance:5000 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 △ Contact:Brass,Gold Flash Over Nickel
 △ No. Of Contacts:04~100 Contacts
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △/△

08122

APPROVED BY	MEI
CHECKED BY	HZF
DRAWING BY	CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG ±5°

SCALE NONE

REV. A3

UNIT mm

NO. REV.

REVISIONS

CHK

DATE

NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	08/02/2019
△	A2	Modify Data	HZF	05/21/2011
△	A1	Modify Data	HZF	10/15/2009
△	A0	NEW RELEASE	HZF	