




3 Recommended P.C.B. Layout

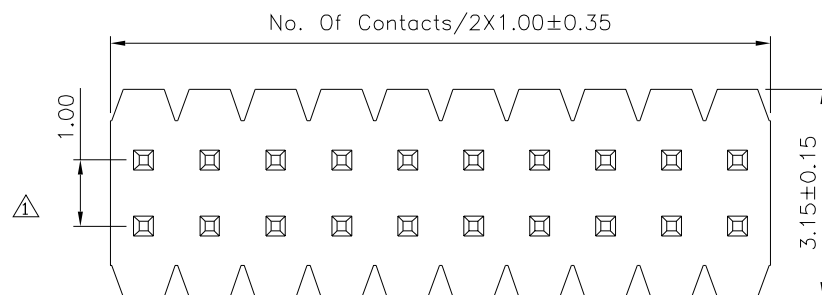

1

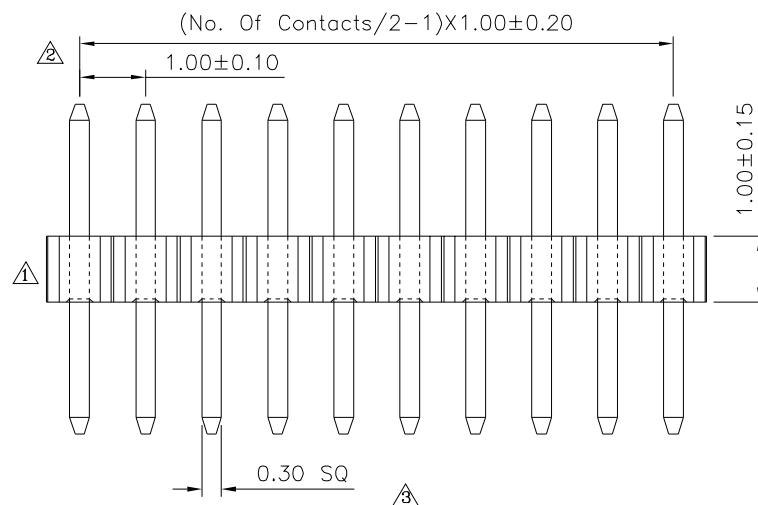

2

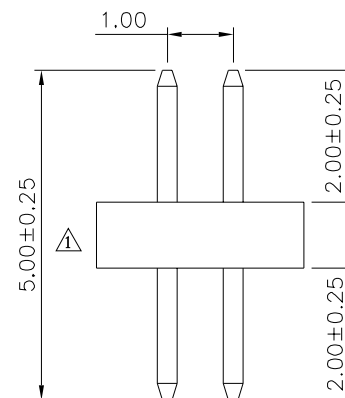

3/2

3 SPECIFICATION

Current:1A
Withstanding Voltage:500V AC/Minute
Insulation Resistance:5000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Operation Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:04~100 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 2/3

08137

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

REV. A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.38
.XX ±0.25
ANG ±5°

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	08/02/2019
2	A2	Modify Data	HZF	05/21/2011
1	A1	Modify Data	HZF	10/15/2009
0	A0	NEW RELEASE	HZF	