
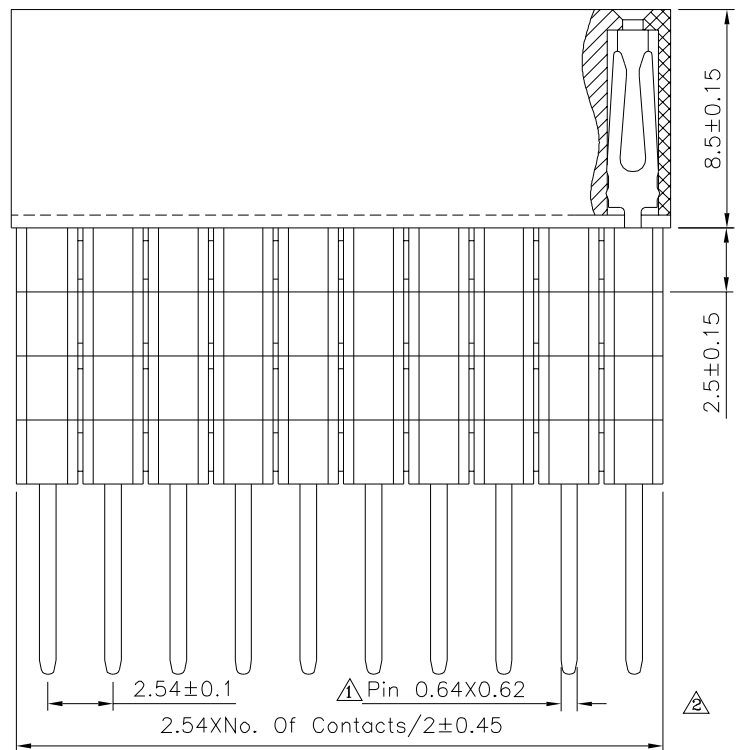


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

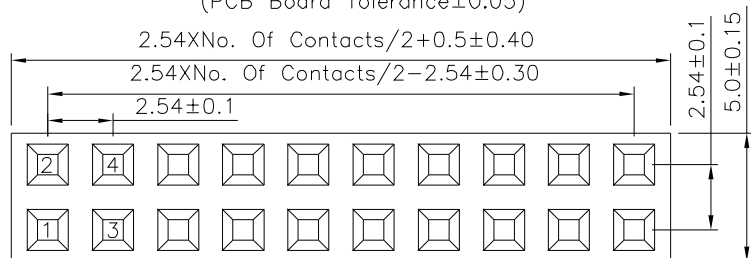


SPECIFICATION

Current Rating:3A

- Withstand Voltage:1000V AC Min./Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operating Temperature:-40°C~+105°C

- Insulator:PA9T(UL94V-0),Black
- Contact:Brass,Gold Flash Over Nickel
- RoHS Compliant

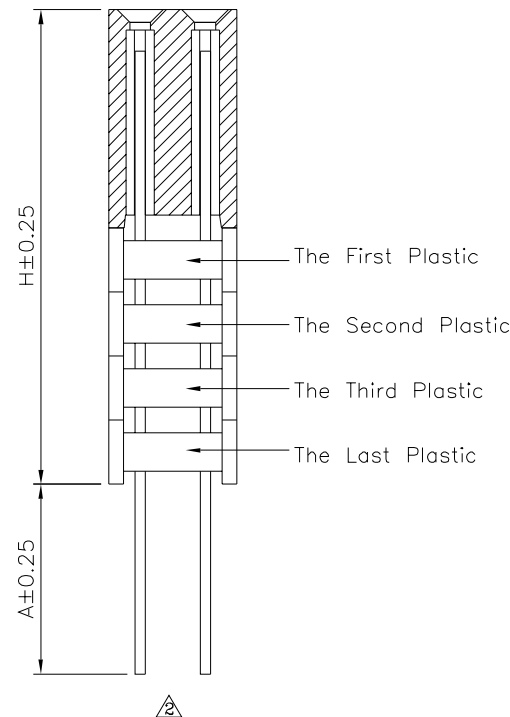

Series no.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

08412

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

Δx ± 0.30 x $\pm 2^\circ$
 $.x$ ± 0.25 $.x$ $\pm 1.5^\circ$
 $.xx$ ± 0.20 $.xx$ $\pm 1.0^\circ$
 $.xxx$ ± 0.15 $.xxx$ $\pm 0.5^\circ$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
Δ	A2	Modify Data	HZF	01/26/2024
Δ	A1	Modify Data	HZF	12/20/2023
Δ	A0	NEW RELEASE	HZF	05/03/2014