File No.	LH7E-PH2S-2	SHEET	1 / 1

SPECIFICATIONS

Current Rate : 1AMP
Insulation Resistance : 5000Megohms Min.
At DC 500V
Contact Resistance : 20 Milliohms Max.
At DC 100mA
Operation Temperature : −55°C To +105°C
Insulator : PBT UL 94V−0
Contact : Brass,Gold Flash Over Nickel

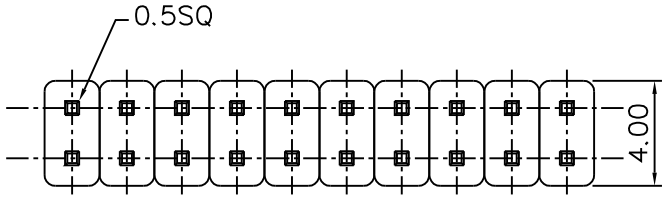

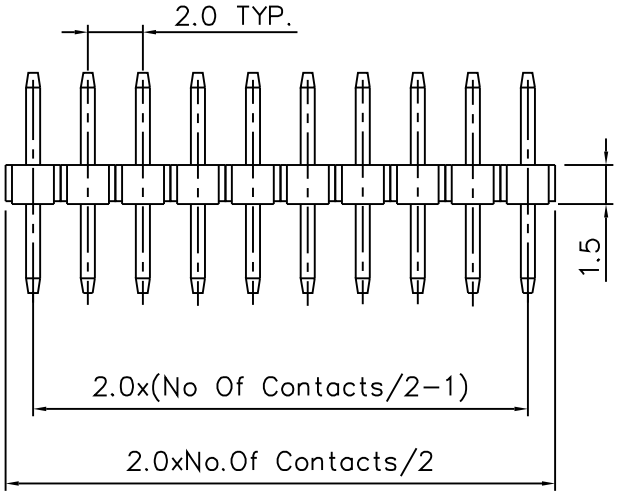

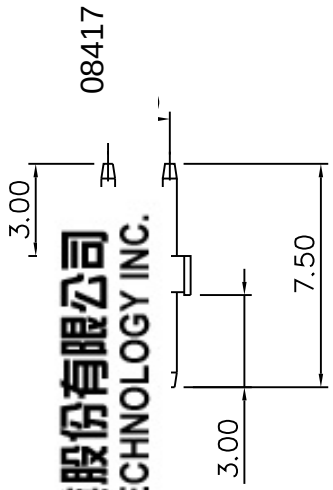

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED			
0110LH7E07	CHECKED BY RAN	TOLERANCE .X .XX .XXX			
	DRAWING BY HZF	UNIT mm	AREA	REVISIONS	CHK	DATE
SCALE NONE	REV. A					