

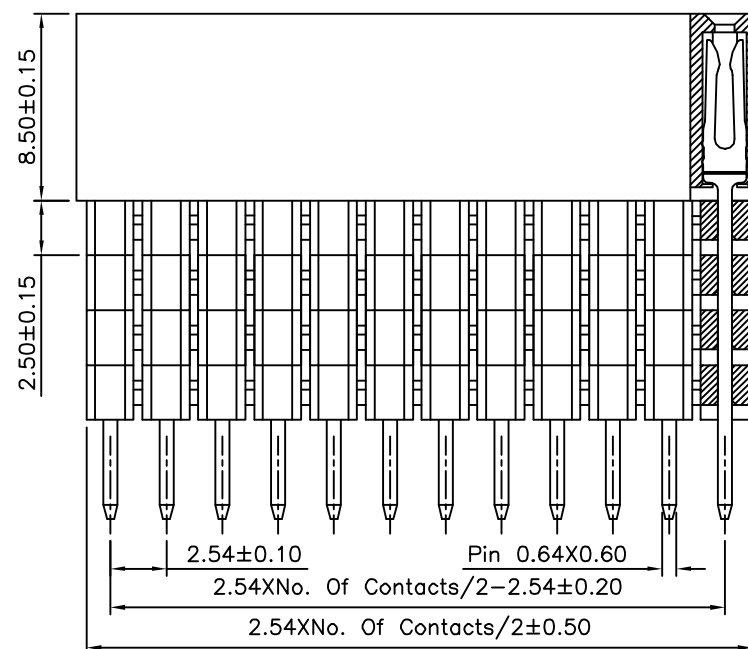


Recommended P.C.B. Layout (Top Side)
(PCB Board Tolerance ± 0.05)

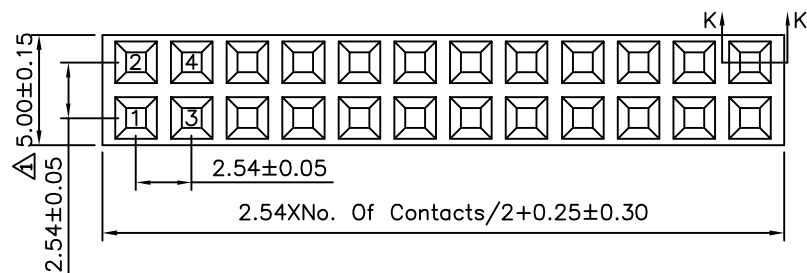

Section K-K

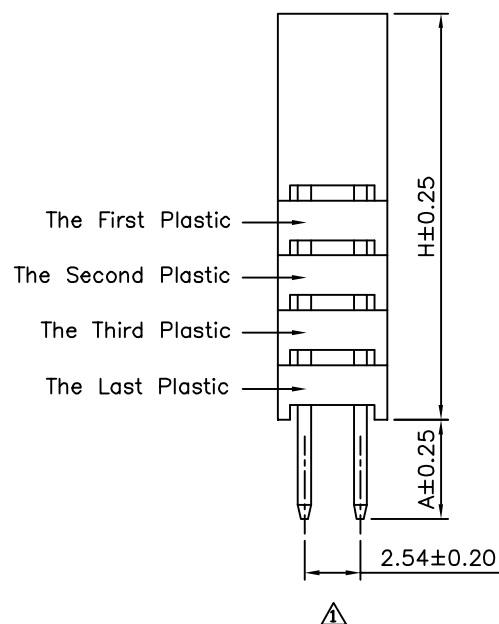

SPECIFICATION

Current Rating: 3.0 Amp
Withstand Voltage: 1000V AC/DC
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact: Brass, Gold Plated Over Nickel
Insulator: PBT+30%G.F.(UL94V-0), Black
RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.05	2.30
0196	1	11.05	7.35
0196	1	11.05	12.2
0197	2	13.59	4.85
0197	2	13.59	9.65
0198	3	16.13	2.30
0198	3	16.13	7.10
0199	4	18.6	4.60

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

08422

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^{\circ}$

SCALE

NONE

REV.

B1

UNIT

mm

NO. REV.

REVISIONS

CHK

DATE

NO. REV.

REVISIONS

CHK

DATE

B1

Modify Data

HZF

03/09/2016

B0

NEW RELEASE

HZF

05/07/2014