

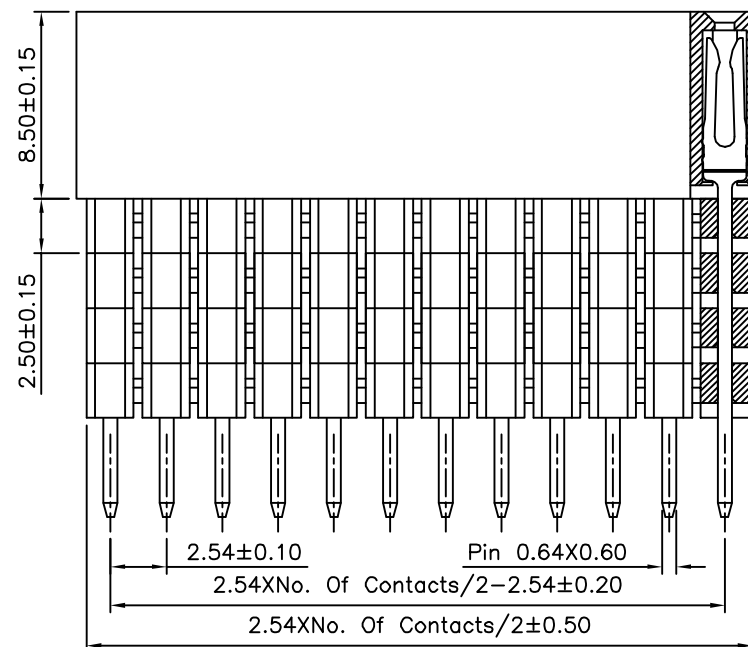


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

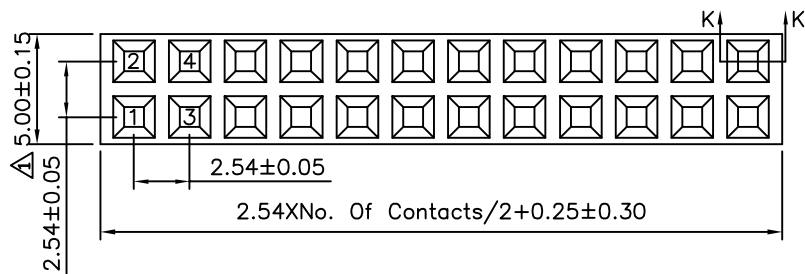

Section K-K

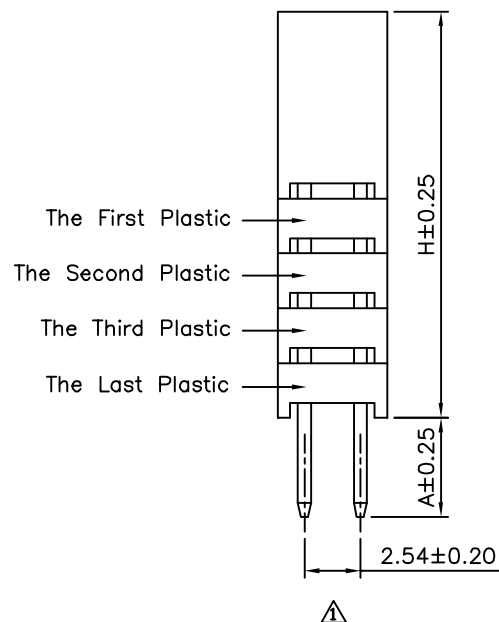

SPECIFICATION

Current Rating:3.0 Amp
Withstand Voltage:1000V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Plated Over Nickel
Insulator:PBT+30%G.F.(UL94V-0),Black
RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.05	2.30
0196	1	11.05	7.35
0196	1	11.05	12.2
0197	2	13.59	4.85
0197	2	13.59	9.65
0198	3	16.13	2.30
0198	3	16.13	7.10
0199	4	18.6	4.60

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

08429

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^\circ$

SCALE

NONE

REV.

B1

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE

B1

Modify Data

HZF

03/09/2016

B0

NEW RELEASE

HZF

05/07/2014